


Inspection

Information

When inspection oil, parking the vehicle on flat ground.

1. Park the vehicle on flat ground and turn off the engine.
2. Remove the engine room under cover (A).

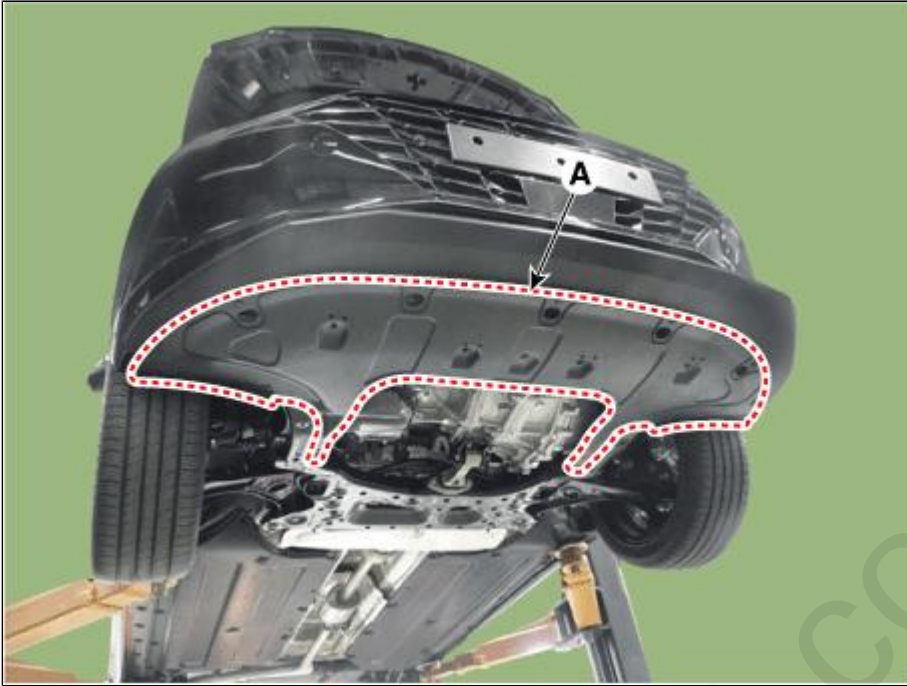


3. Remove the oil filler plug, and check the oil state and oil level.

NOTICE

For the accuracy, inspect the oil level after the oil is completely drained.
Loosen the drain plug (A) and wait for over 10 minutes until the oil is drained enough.
Tighten the drain plug.


Tightening torque :

44.1 - 58.9 N.m (4.5 - 6.0 kgf.m, 32.5 - 43.4 lb-ft)

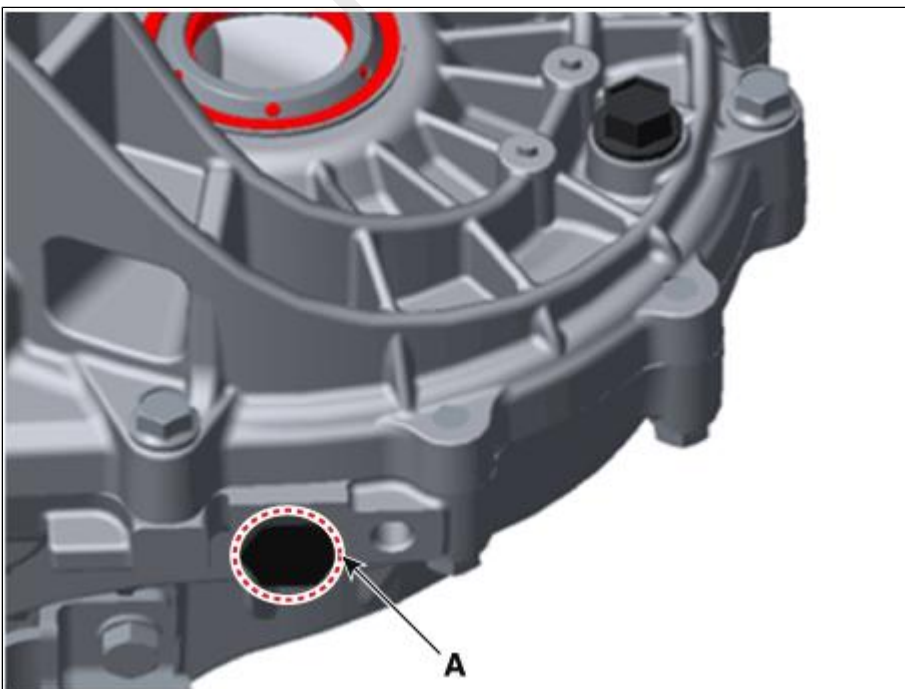

Install the drain plug bolt with new gasket (A).

New gasket part number : 45323-39000

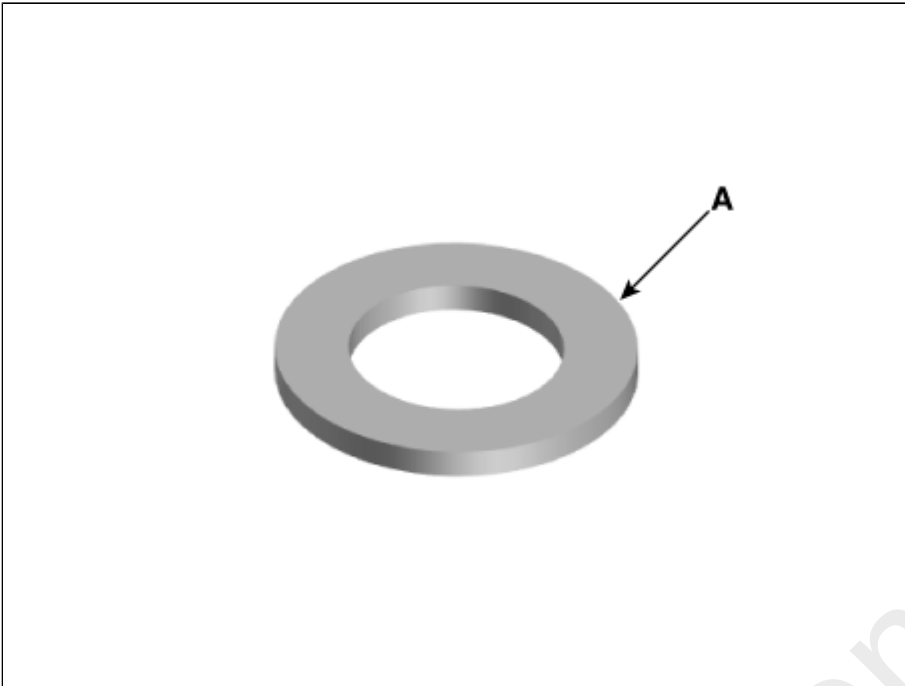


After the inspection, inject the oil through the filler plug hole according to the specification.

Oil capacity :

1.6 - 1.7 L (0.42 - 0.44 U.S gal., 1.69 - 1.79 U.S.qt., 1.41 - 1.49 Imp qt.)


While draining, some of the oil flows into the transmission part and the oil may be less than the specification by 0.1 - 0.15 L (0.03 - 0.04 U.S.gal., 0.10 - 0.16 U.S. qt., 0.09 - 0.13 Imp qt.) This is normal and additional oil injection is not required.

4. Install the filler plug (A) with new gasket.

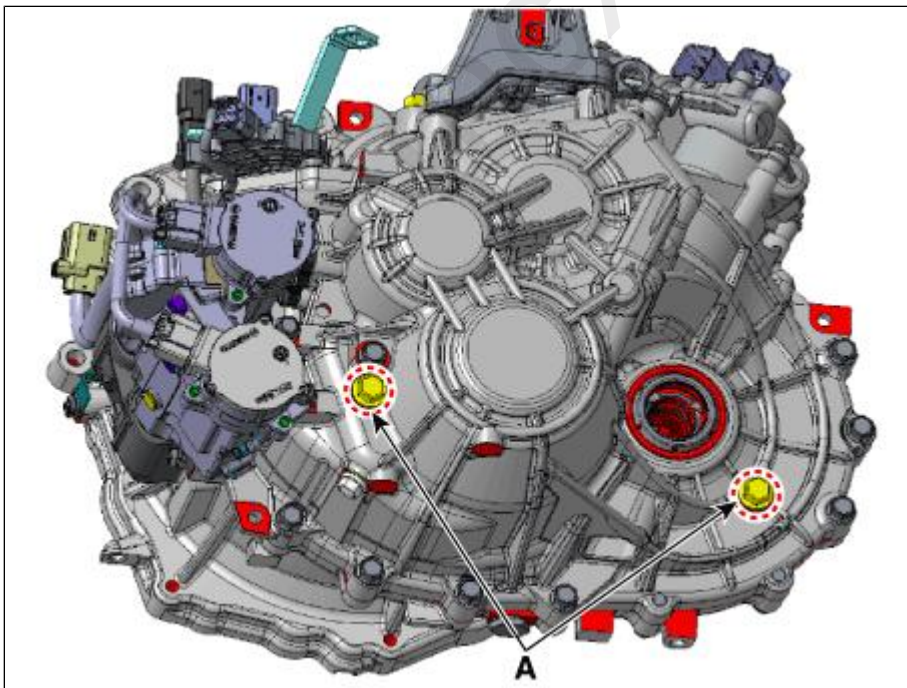


NOTICE

The existing filler plug gasket (A) must be replaced with a new one. (Do not reuse it.)

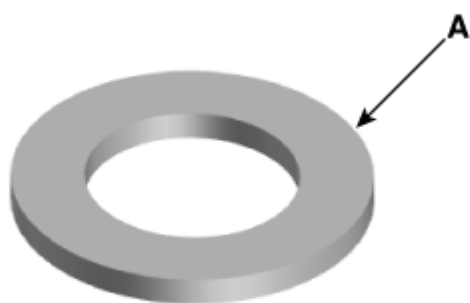

5. Install the engine room under cover (A).

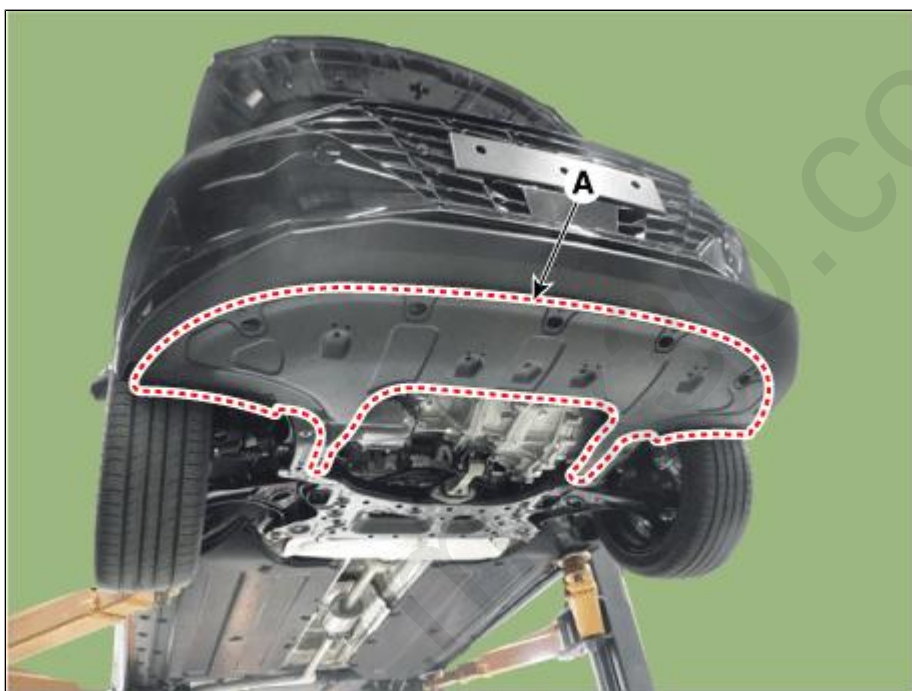


Replacement

i Information

When replacement oil, parking the vehicle on flat ground.


1. Park the vehicle on flat ground and turn off the engine.
2. Remove the engine room under cover (A).

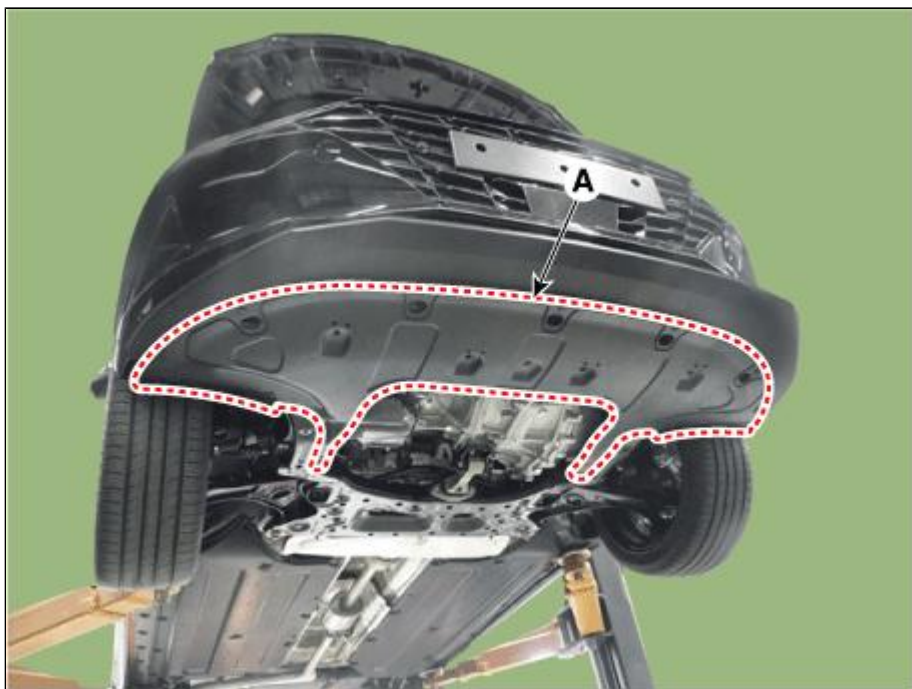

3. Remove the drain plug (A) and drain all the oil. Then install the drain plug with a new gasket.

Tightening torque :


44.1 - 58.9 N.m (4.5 - 6.0 kgf.m, 32.5 - 43.4 lb-ft)

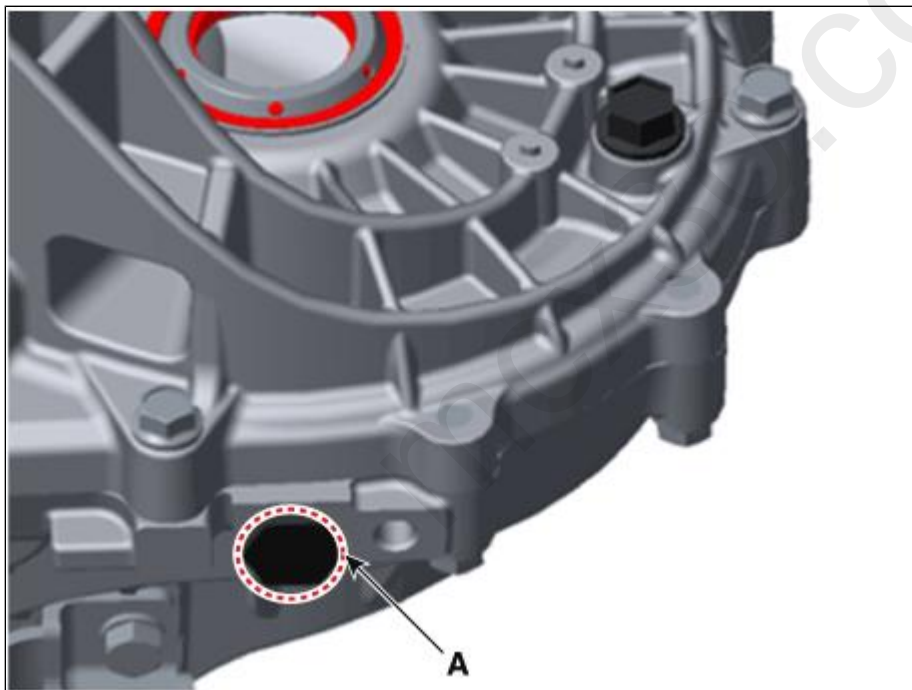

NOTICE

Install the drain plug bolt with new gasket (A).

New gasket part number : 45323-39000

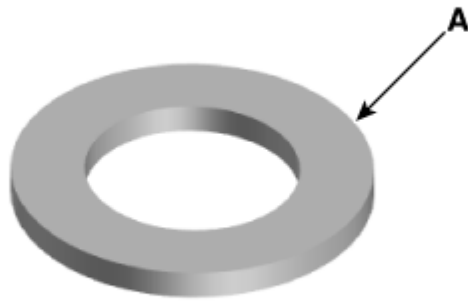

4. Add new oil through the filler plug hole (A) and, fill it just below the plug opening.

Standard oil :


API Service GL-4, SAE 70W

Recommend oil :

H.K.SHELL : SPIRAX S6 GHDE 70W DCTF PLUS, SK : HK D DCTF TGO-10 PLUS

Oil capacity :

1.6 - 1.7 L (0.42 - 0.44 U.S gal., 1.69 - 1.79 U.S.qt., 1.41 - 1.49 Imp qt.)

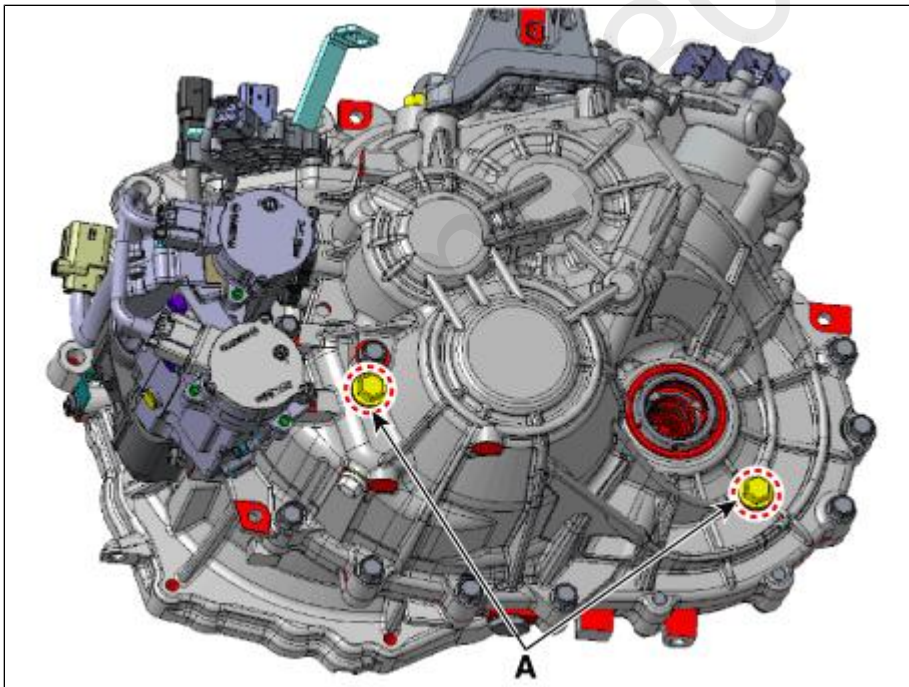


5. Install the filler plug with new gasket.

Tightening torque :


58.9 - 78.5 N.m (6.0 - 8.0 kgf.m, 43.4 - 57.8 lb-ft)

NOTICE

The existing filler plug gasket (A) must be replaced with a new one. (Do not reuse it.)

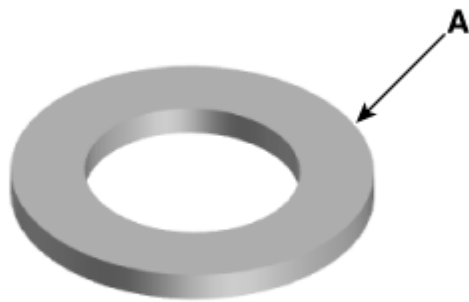

6. Install the engine room under cover (A).

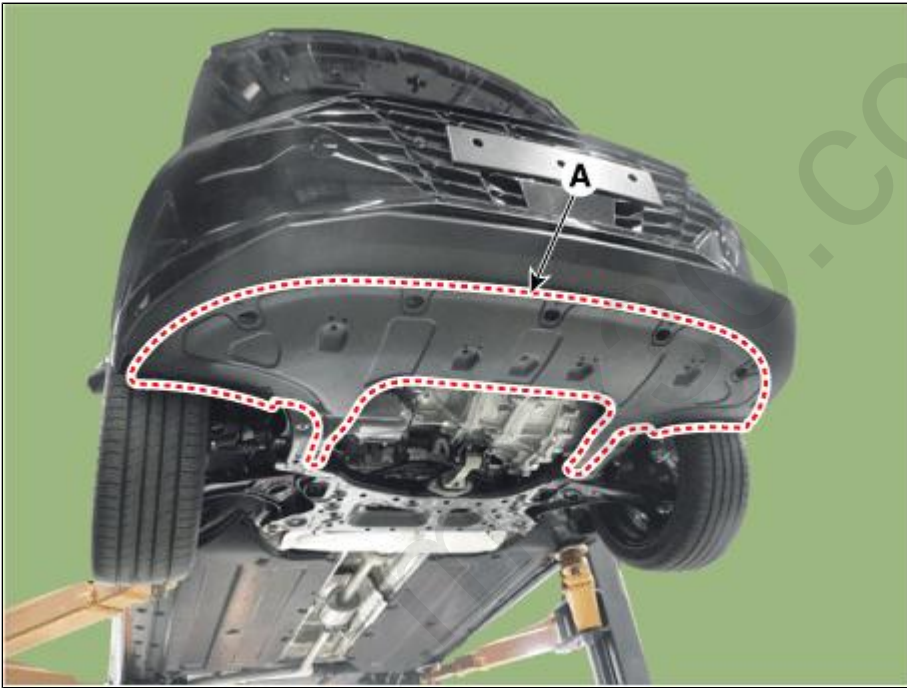

Rate this Document

☐ Document Type : SHOP

☐ Document Rating :

Please rate the above contents on a scale of 1 to 5.

Little Value	1	2	3	4	5	Excellent Value