


Removal


NOTICE

Take care not to scratch the cluster fascia panel and related parts.
Wrap the protective tape on the tool to disassemble with the screwdriver or remover.
Use caution in keeping and handling during disassembling/assembling because it is easily contaminated with lubricant and oil.


1. Disconnect the negative (-) battery terminal.
2. Using a flat-tip screwdriver or remover, remove the photo sensor cover (A).

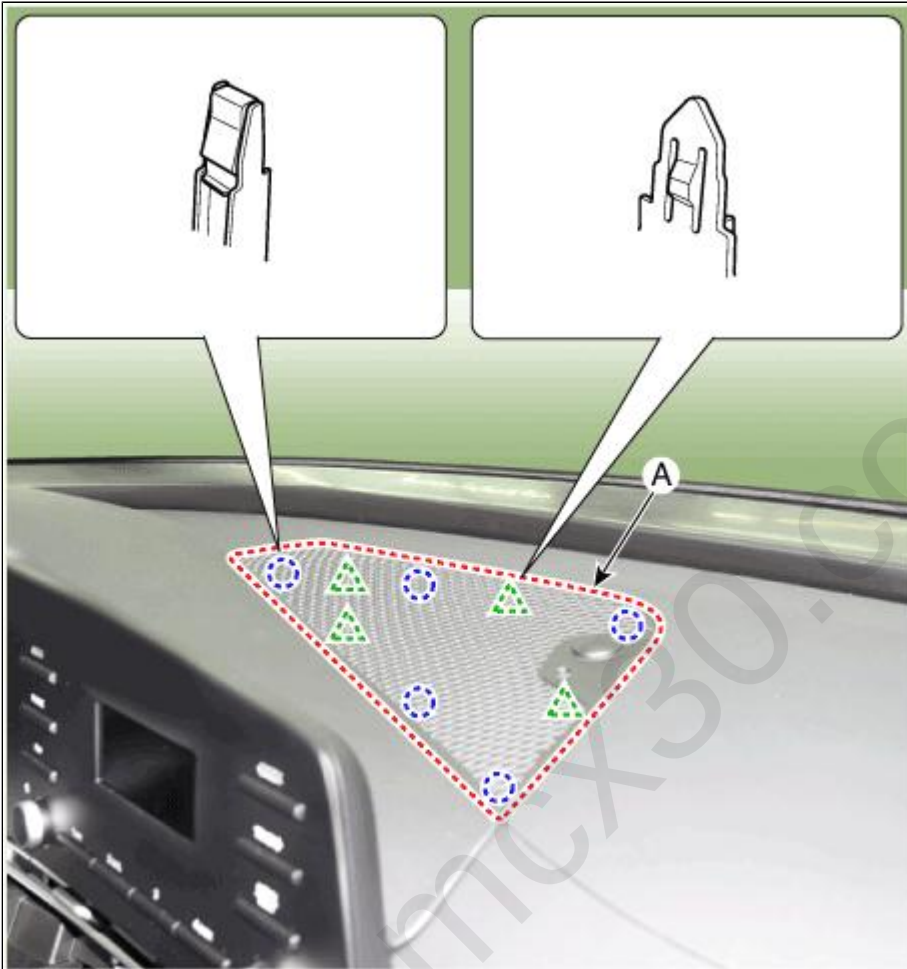

3. Disconnect photo sensor connector and security sensor connector (A).

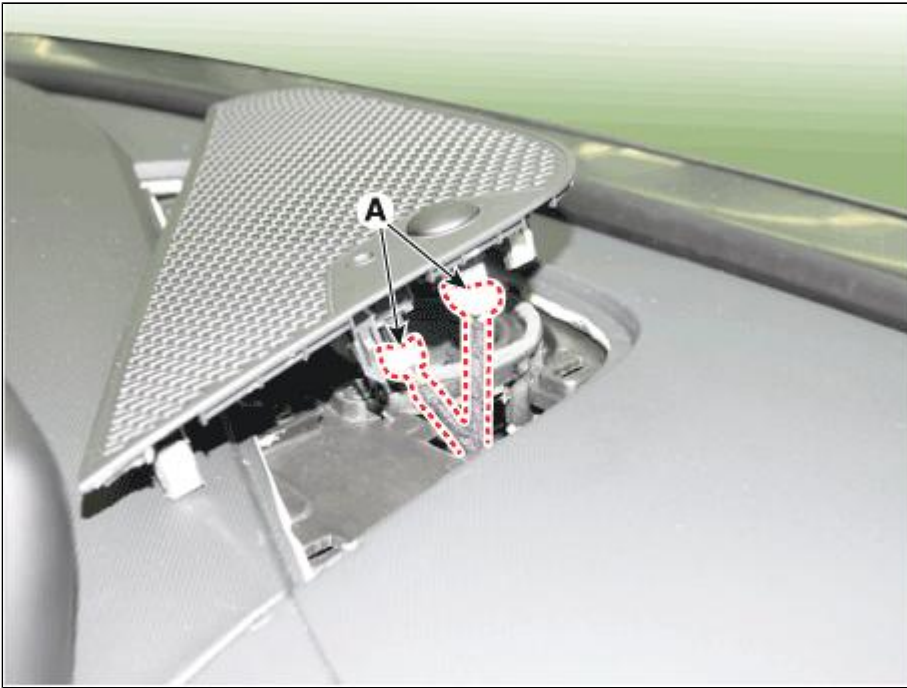


4. Using a flat-tip screwdriver or remover, remove the cluster fascia upper garnish (A).

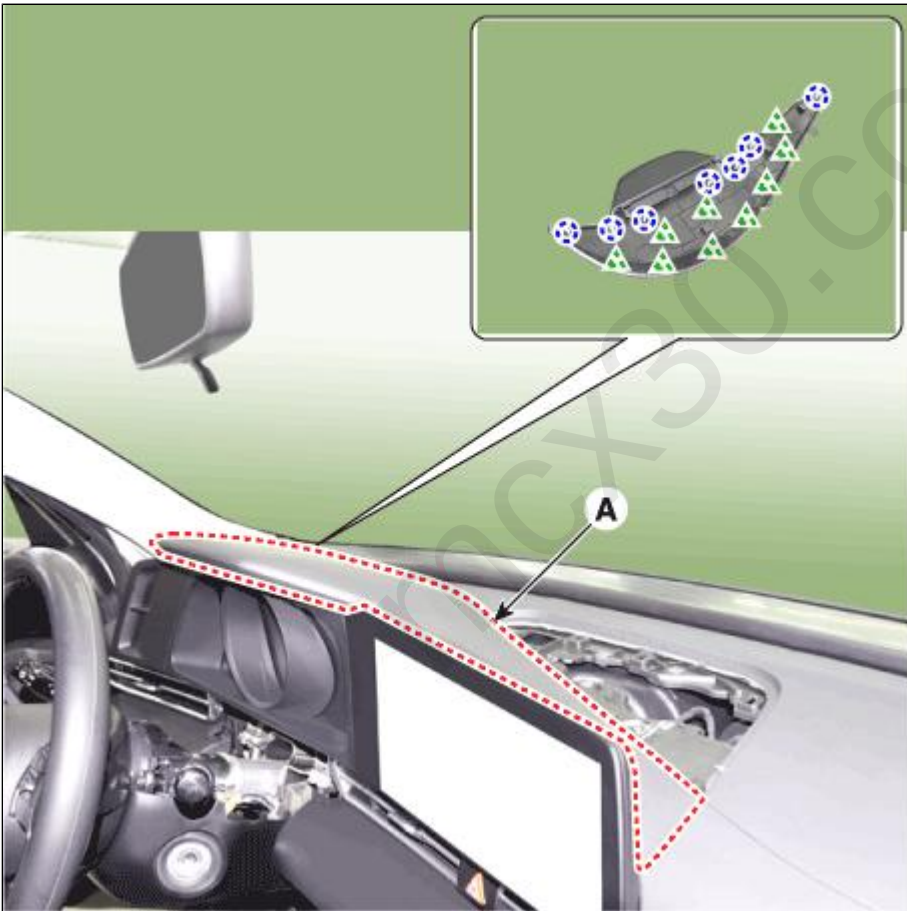


5. Remove the cluster fascia side panel (A) after mounting screws.




6. Remove the cluster fascia panel (A) after loosening mounting screws.

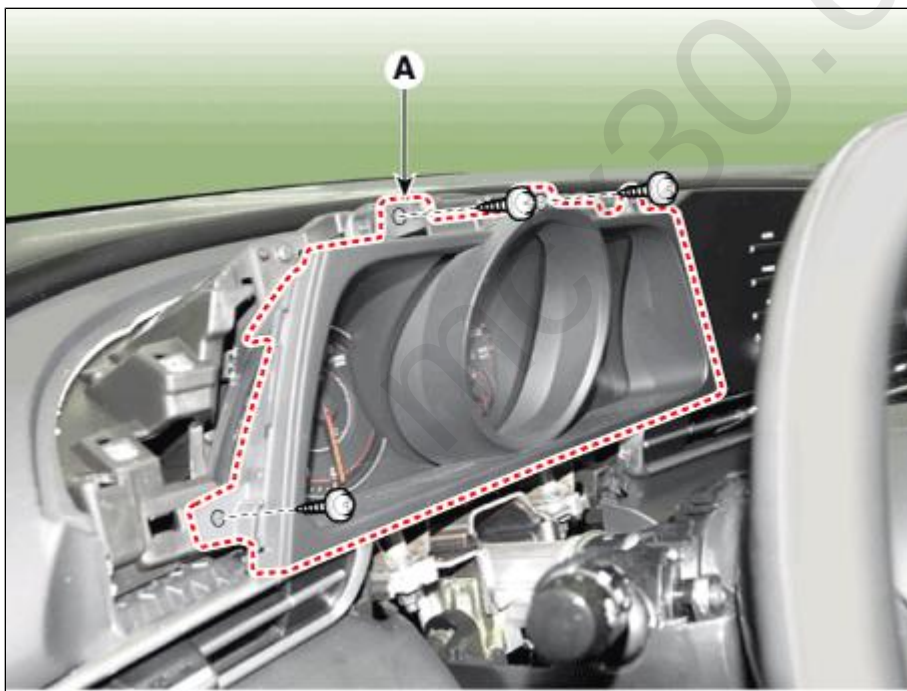

7. Remove the audio head unit (A) after loosening the screws.

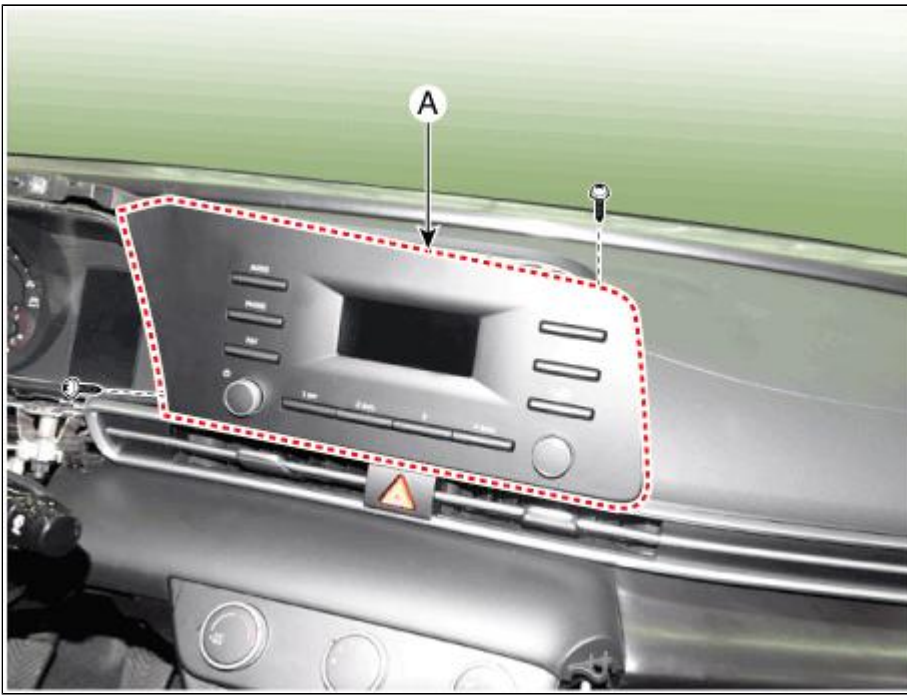

8. Remove the audio head unit after disconnecting the connectors and cable (A).

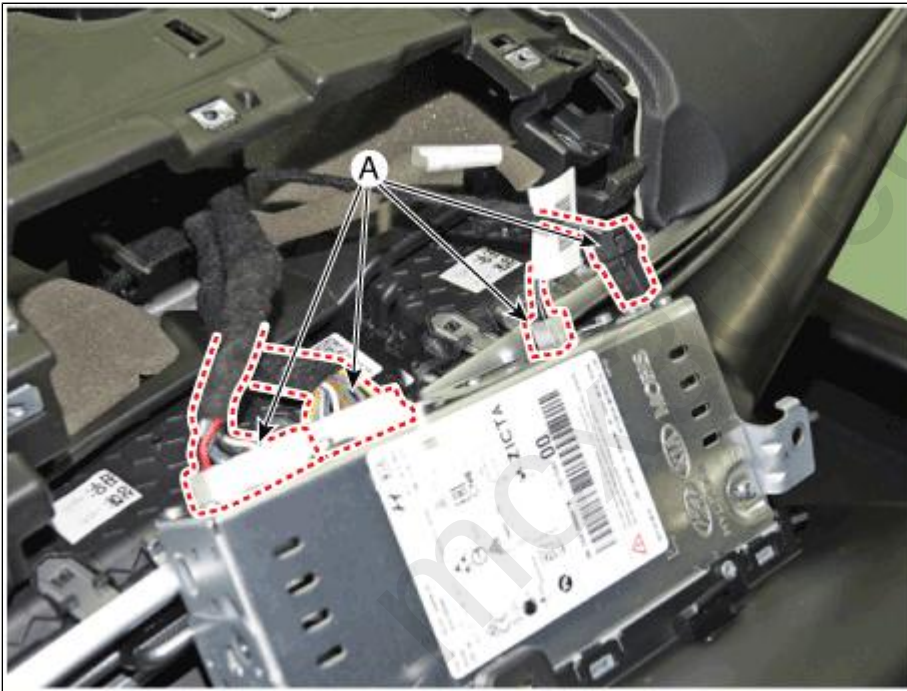

Installation

1. Connect the audio unit connectors and cable.
2. Install the audio head unit.
3. Install the cluster fascia panel.
4. Install the cluster fascia side panel.
5. Install the cluster fascia upper garnish.
6. Install the photo sensor cover.
7. Connect the negative (-) battery terminal.

NOTICE

Make sure the connector are connected in properly.
Check the audio system.

☐ Document Type : SHOP

☐ Document Rating :

Please rate the above contents on a scale of 1 to 5.

Little Value 1 2 3 4 5 Excellent Value

mcx30.com