



Inspection

Glass Antenna Test

1. Wrap aluminum foil (A) around the tip of the tester probe (B) as shown.

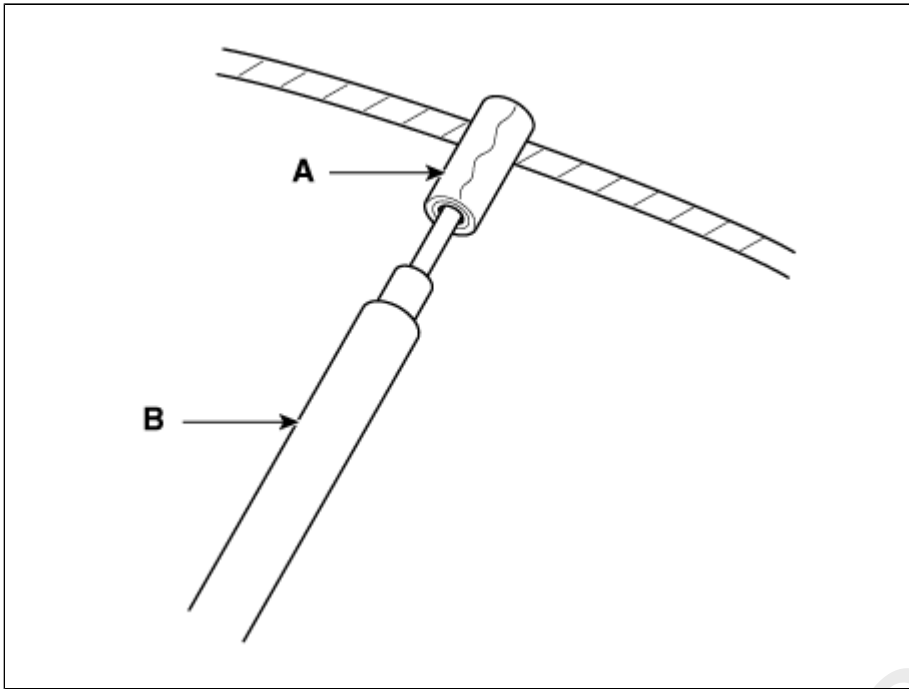

2. Touch one tester probe to the glass antenna terminal (A) and move the other tester probe along the antenna wires to check that continuity exists.

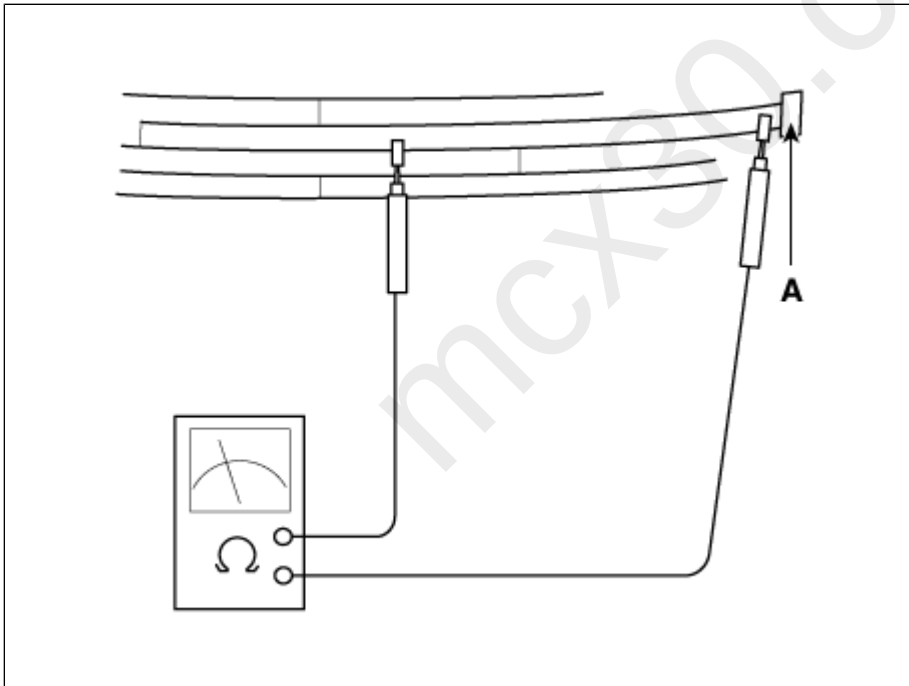


Glass Antenna Repair

NOTICE

To make an effective repair, the broken section must be no longer than one inch.


1. Lightly rub the area around the broken section (A) with fine steel wool, and then clean it with alcohol.

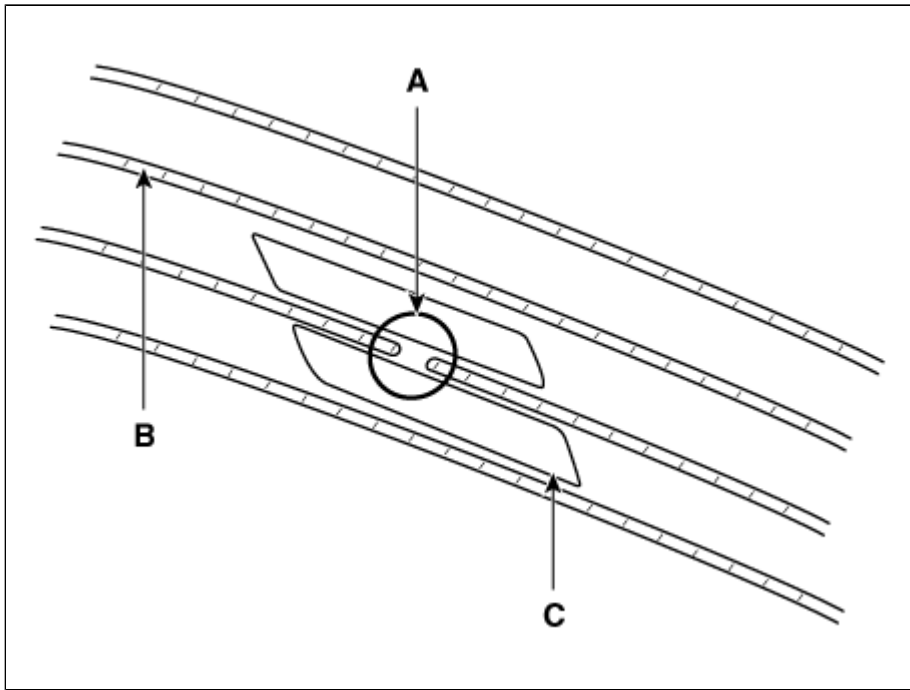

2. Carefully mask above and below the broken portion of the glass antenna wire (B) with cellophane tape (C).
3. Using a small brush, apply a heavy coat of silver conductive paint (A) extending about 1/8" on both sides of the break. Allow 30 minutes to dry.

NOTICE


Thoroughly mix the paint before use.

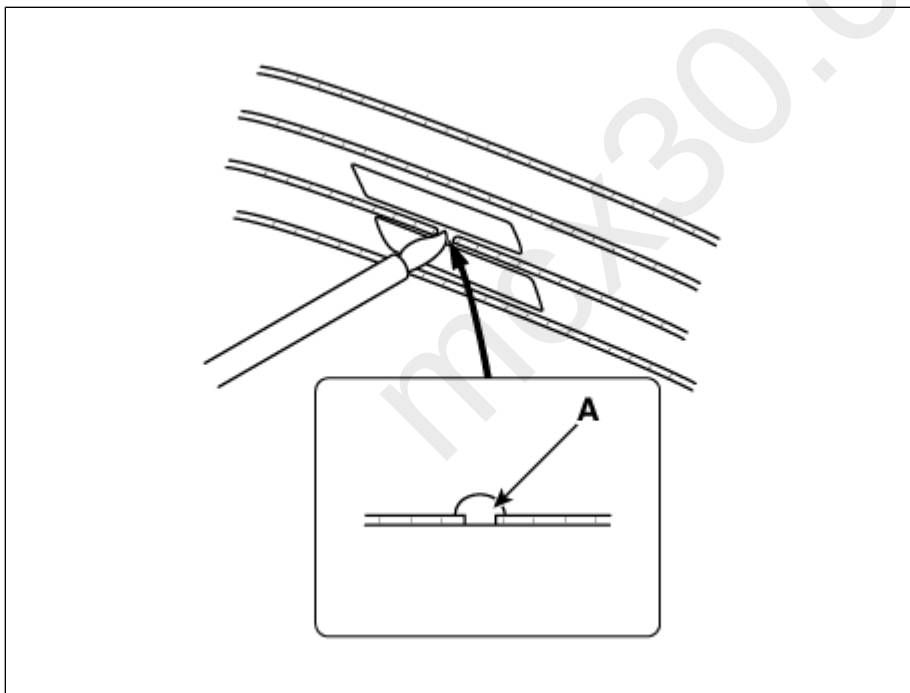

4. Check for continuity in the repaired wire.
5. Apply a second coat of paint in the same way. Let it dry three hours before removing the tape.


Glass Antenna Circuit Inspection

1. Remove the rear pillar trim.
(Refer to Body - "Rear Pillar Trim")
2. Disconnect the antenna amp power connector from the glass antenna amp (A).

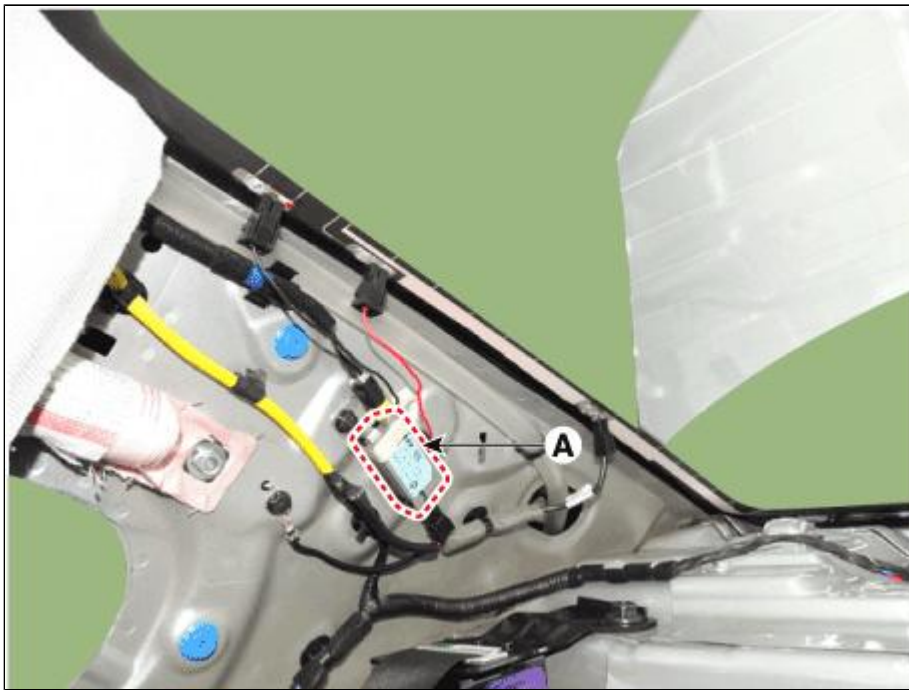

3. Turn the radio ON.
Measure the voltage between terminals of the antenna amp power connector (A) and body ground (B).

OK : approximately 12V (ACC+)

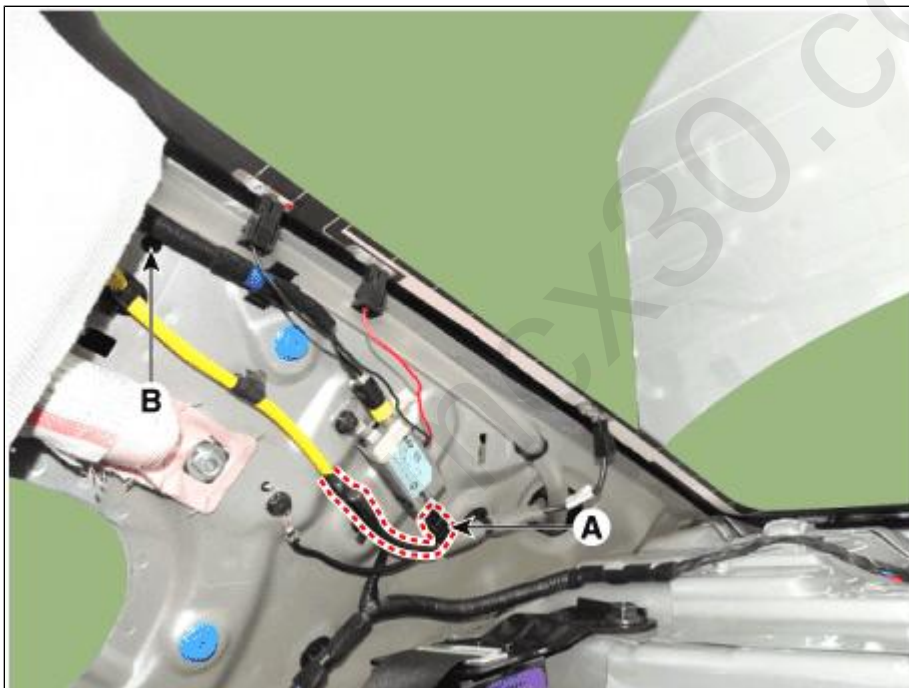


4. Check for radio antenna wire resistance between terminals of the antenna connector (A) and body ground (B).
(1) AM antenna (RH side rear pillar)

Standard value : 125k Ω - 165k Ω

Short : Approx. 0 Ω

Open : $\infty \Omega$

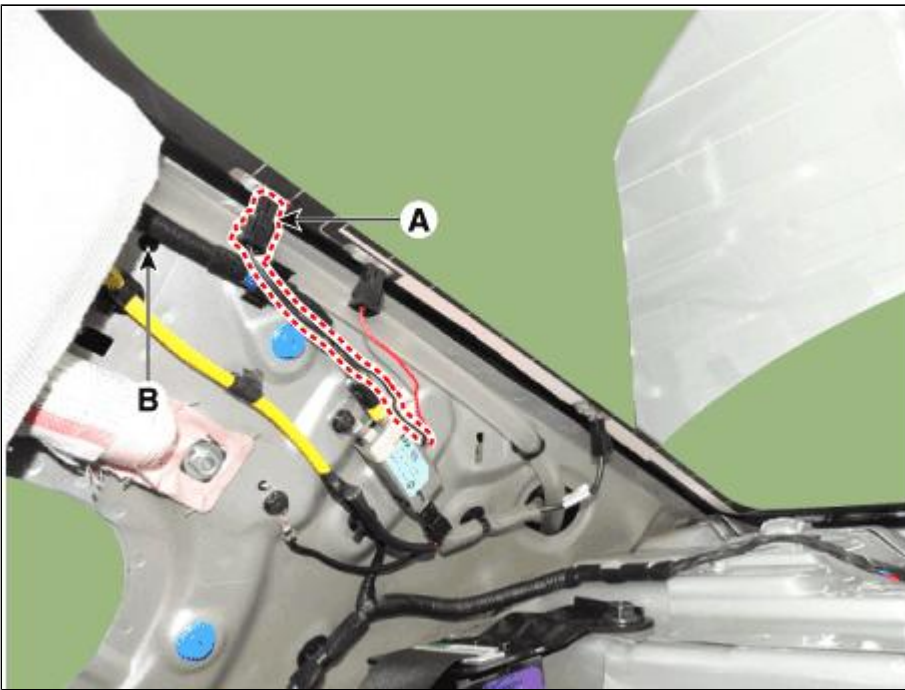


(2) FM1/FM2 antenna (RH side rear pillar)

Standard value : 80k Ω - 120k Ω

Short : Approx. 0 Ω

Open : $\infty \Omega$

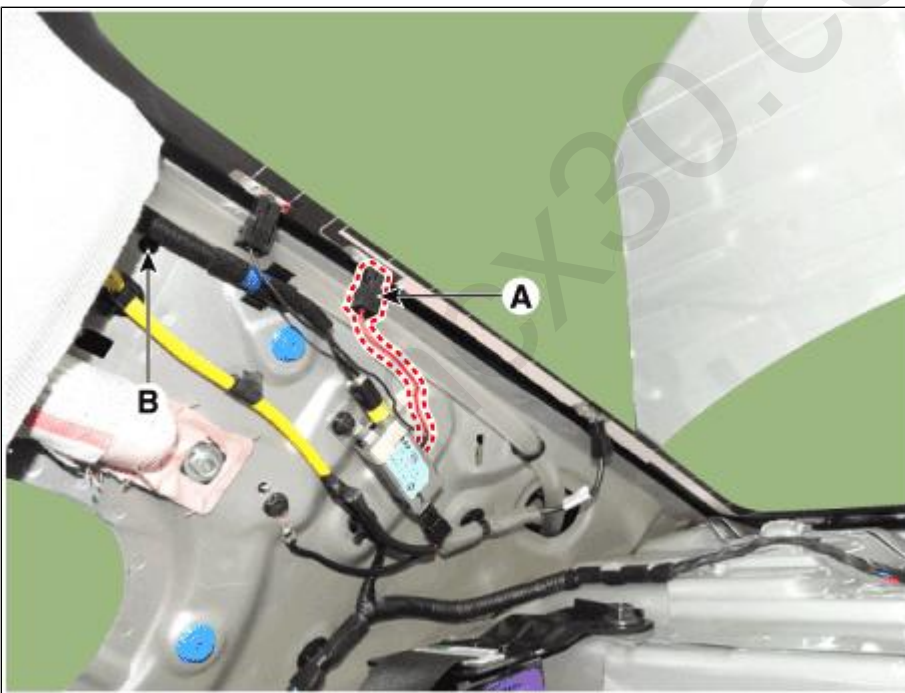


5. Check the grid lines for continuity.


6. When a poor radio reception is not repaired through the above inspection methods, replace the amp.
If the radio reception is still poor, check the radio cable for short and radio head unit for failure.

Antenna Cable

1. Check for continuity between the center poles of antenna cable.

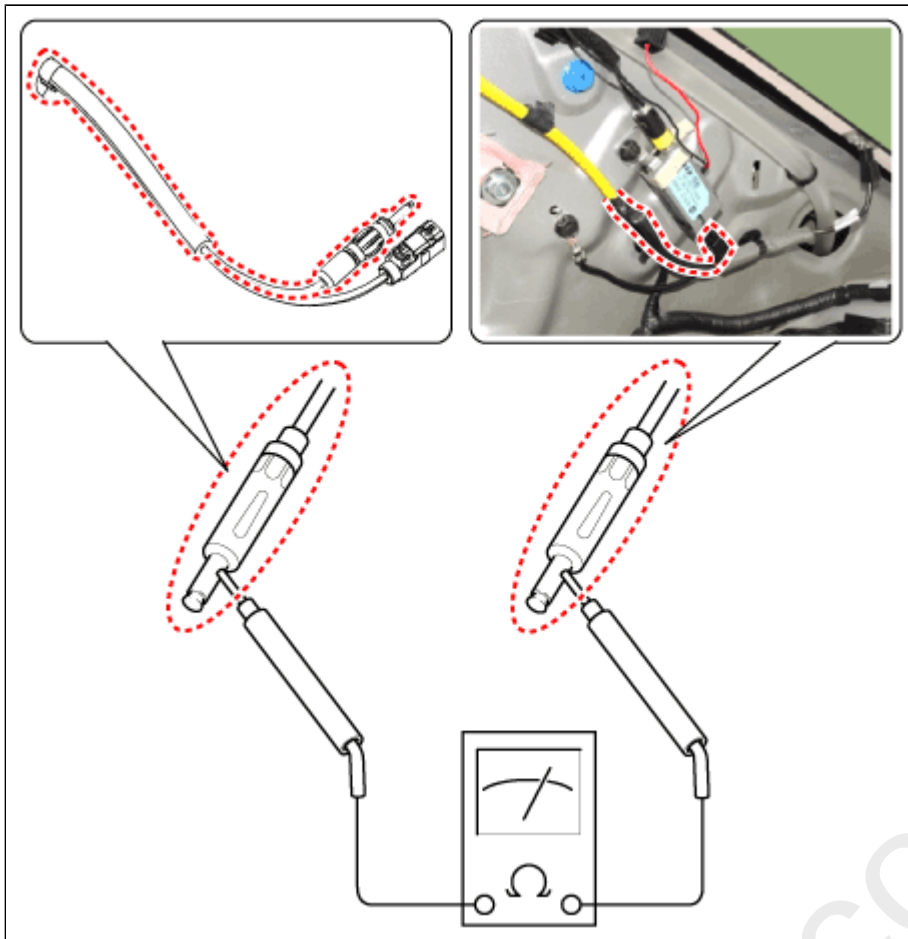


2. Check for continuity between the outer poles of antenna cable. There should be continuity.

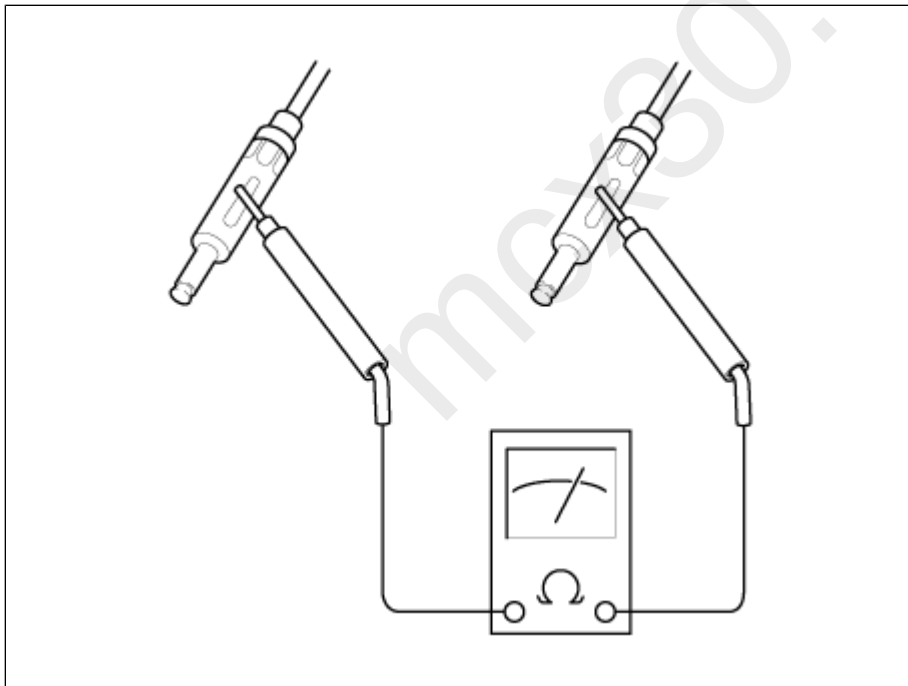


3. If there is no continuity, replace the antenna cable.

4. Check for continuity between the center pole (A) of antenna cable and terminal of glass antenna (B). There should be continuity.

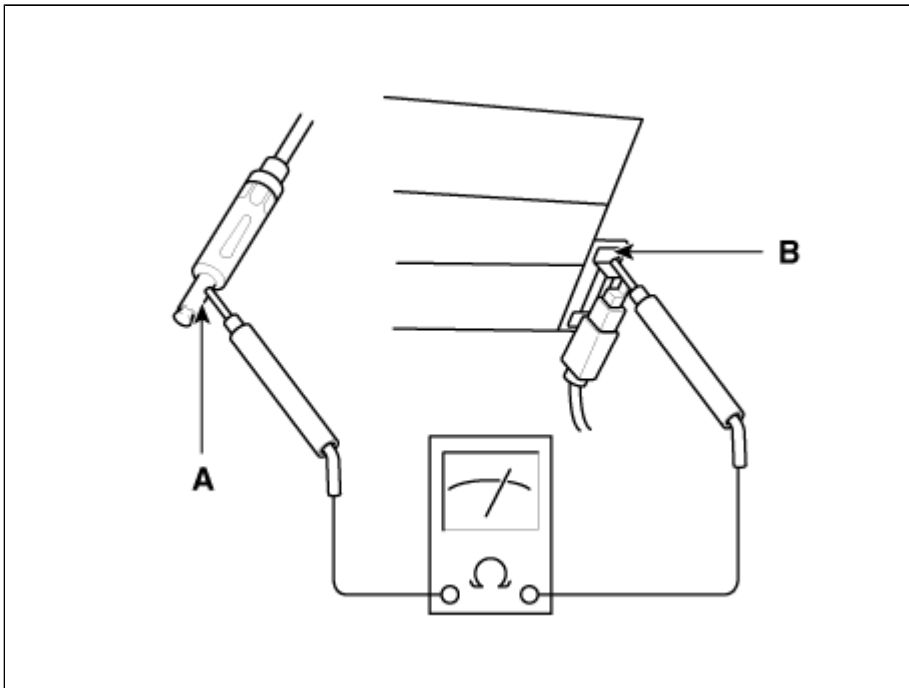

5. If there is no continuity, replace the antenna amplifier.
6. Check for continuity between the center pole (A) and outer pole (B) of antenna cable. There should be no continuity.

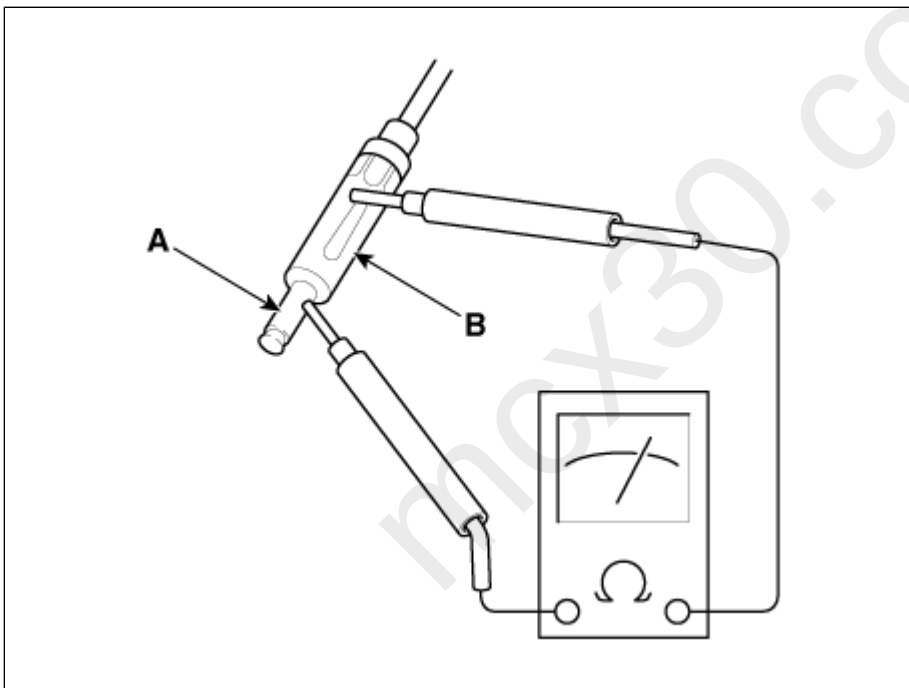

7. If there is continuity, replace the antenna cable.

Rate this Document

☐ Document Type : SHOP

☐ Document Rating :

Please rate the above contents on a scale of 1 to 5.

Little Value	1	2	3	4	5	Excellent Value
--------------	---	---	---	---	---	-----------------