

Removal

⚠ CAUTION

Handling wireless charging system parts by wet hands may cause electric shock.

1. Disconnect the negative (-) battery terminal.
2. Remove the floor console upper cover assembly.
(Refer to Body - "Floor Console Upper Cover")
3. Disconnect the connector (A) and remove the wireless power charger unit.



Installation

1. Install the wireless power charging unit.
2. Connect the wireless power charging unit connectors.
3. Install the floor console upper cover.
4. Connect the negative (-) battery terminal.


[Diagnosis With 진단기기]

1. In the body electrical system, failure can be quickly diagnosed by using the vehicle diagnostic system (Diagnostic tool).


The diagnostic system(Diagnostic tool) provides the following information.

- (1) Fault Code Searching : Checking failure and code number (DTC)
- (2) Data Analysis : Checking the system input/output data state
- (3) Actuation test : Checking the system operation condition
- (4) S/W Management : Controlling other features including system option setting and zero point adjustment

2. If diagnose the vehicle by Diagnostic tool, select "DTC Analysis" and "Vehicle".

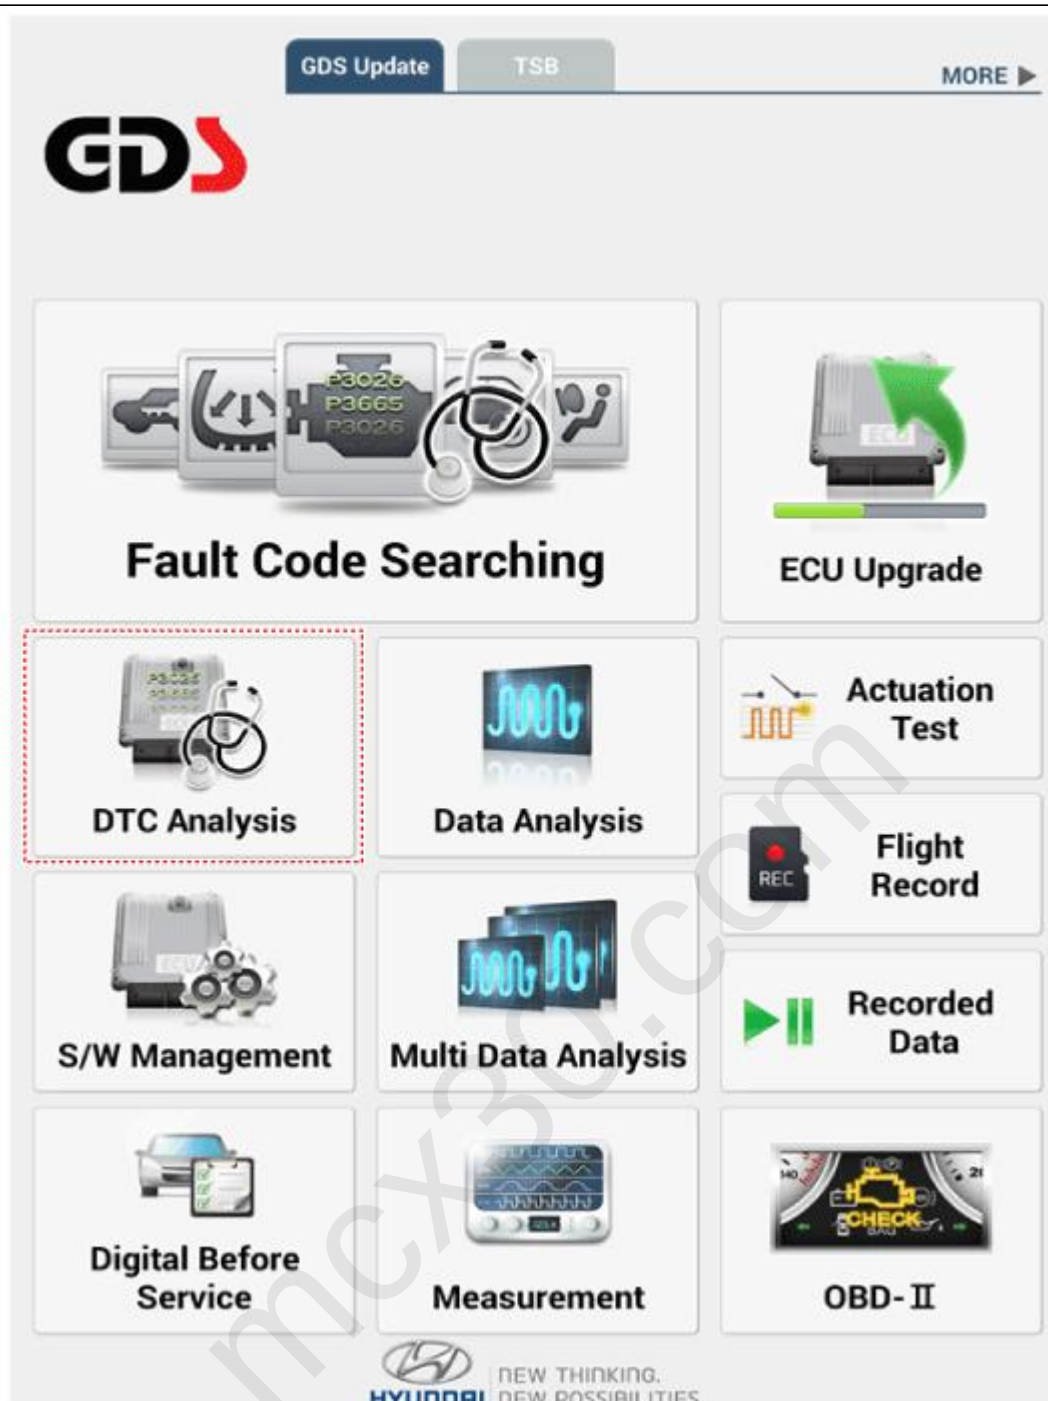

3. If check current status, select the "Data Analysis" .

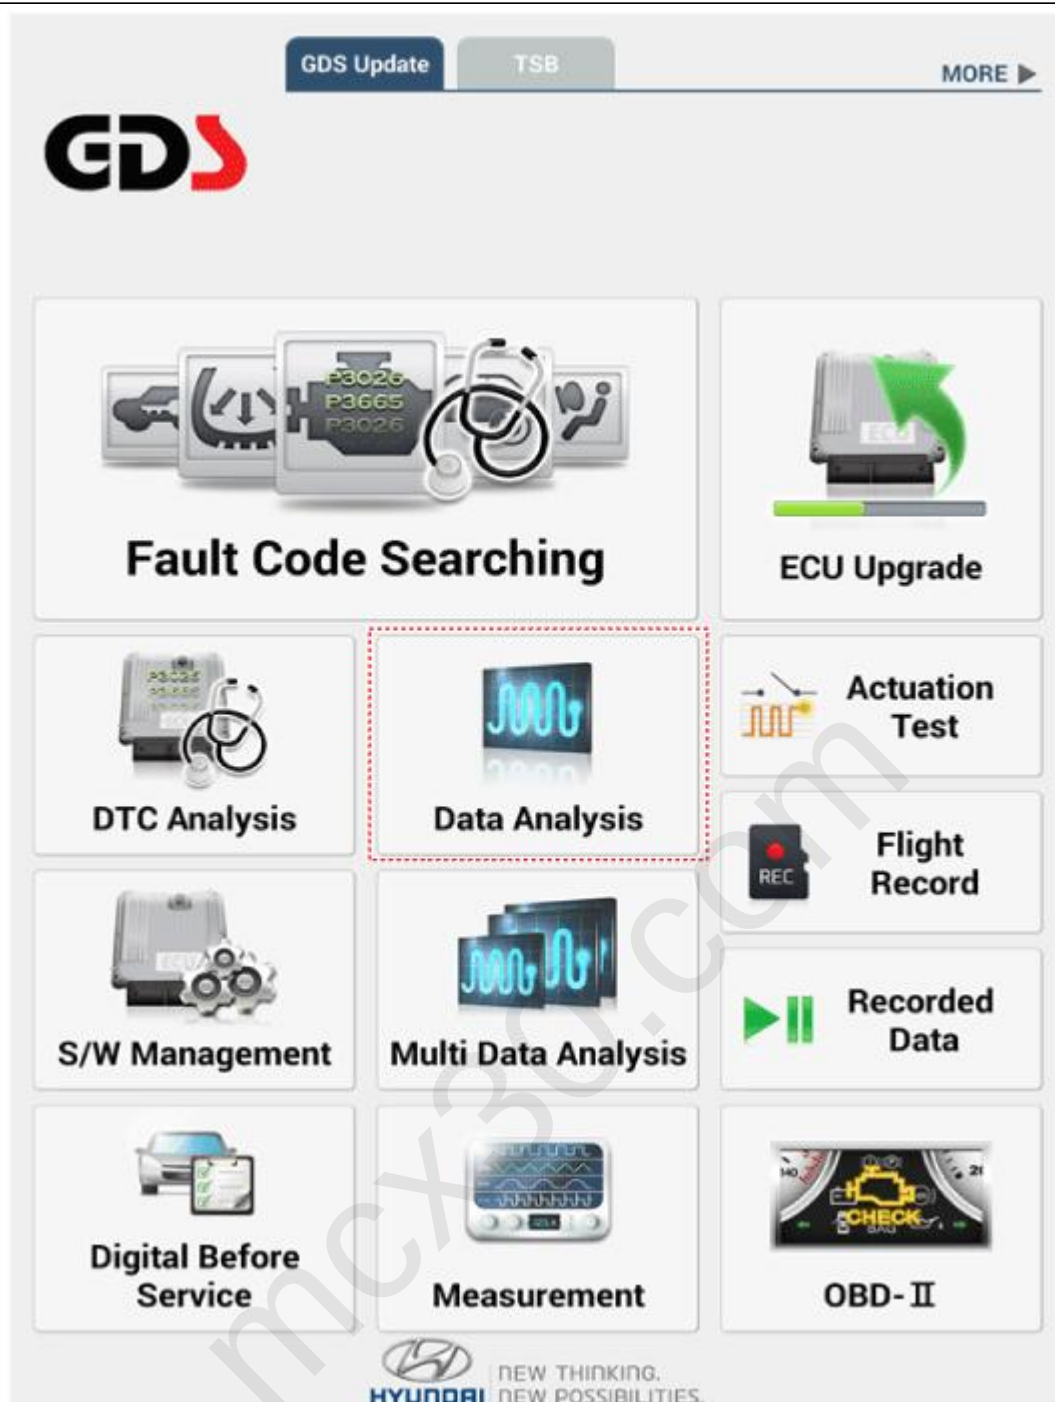

4. Select the 'WPC' to search the current state of the input/output data.

Vehicle Selection

×

Q

←

PREV

AUTO

VIN

↺

RESET

SANTAFE(SM)

SANTAMO(M2)

D 2.2 TCL-R

System Selection

ENGINE

A / T

ABS/ESP

FCA

AIRBAG

AIRCON

4WD

EPS

RVM

SVMS

PA

BCW

FR_CM

AFLS

AHLS

AVN

CLU

DDM

80km/h

TPMS BCM SMK

TPMS BCM IMMO

TPMS BCM SMK

TPMS BCM SMK

PSM

WPC

ICU

PTG

e-Call

UREA

CODE

• System

Wireless Power Charger

OK

Rate this Document

☐ Document Type : SHOP

☐ Document Rating :

Please rate the above contents on a scale of 1 to 5.

Little Value

1

2

3

4

5

Excellent Value