

Roof Opening Panel Control Switch

Removal

1. The roof opening panel switch is replaced as an assembly with the overhead console.
Refer to: Overhead Console (501-12 Instrument Panel and Console, Removal and Installation).

Installation

1. To install, reverse the removal procedure.
-


mcx30.com

Roof Opening Panel Fixed Glass

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the roof opening panel frame.
Refer to: Roof Opening Panel Frame (501-17 Roof Opening Panel, Removal and Installation).
2.
Remove the roof opening panel fixed glass.
 1. Remove the bolts.
Torque: 35 lb.in (4 Nm)
 2. Carefully lift the frame assembly to remove the roof opening panel fixed glass.

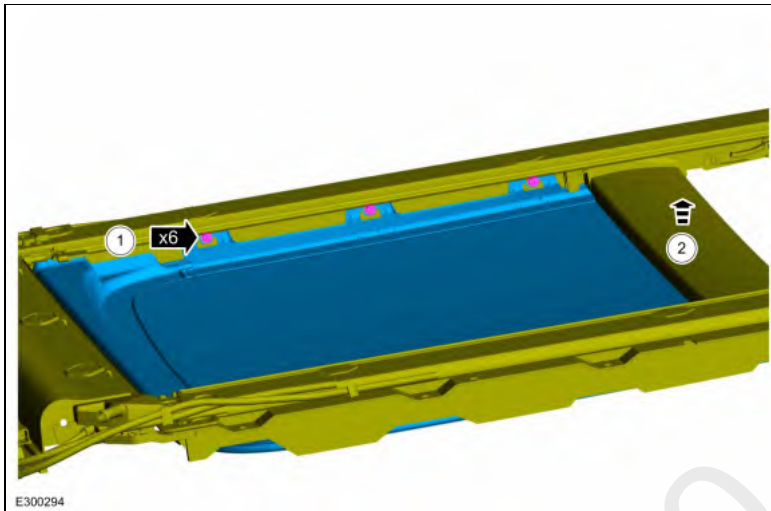

Installation

1. To install, reverse the removal procedure.