

PUBLISHED: 15-OCT-2019
2020.0 DEFENDER (LE), 204-01

FRONT SUSPENSION

FRONT STABILIZER BAR LINK (G2344691)

mcx30.com

REMOVAL AND INSTALLATION

PART(S)

STEP	PART NAME	QUANTITY
Installation Step 1	Stabilizer bar link nuts	2

REMOVAL

NOTES:


- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains illustrations for left side components, right side components are similar.

1. Raise and support the vehicle on a suitable 2 post lift.
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).
2. Remove the front wheel and tire assembly.
Refer to: [Wheel and Tire](#) (204-04 Wheels and Tires, Removal and Installation).

3.

⚠ CAUTION:

Use a suitable tool to prevent the ball joint rotating.

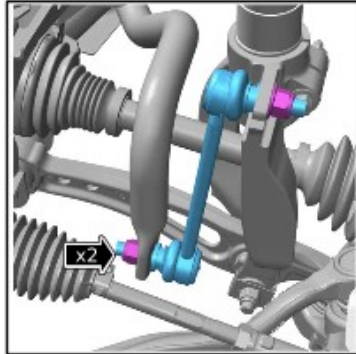

E250296

- Remove and discard the 2 nuts.
- Remove the front stabilizer bar link.

INSTALLATION

1.

⚠ CAUTION:

Use a suitable tool to prevent the ball joint rotating.

- Install the front stabilizer bar link.
- Install and tighten the 2 nuts.
Renew Part: [Stabilizer bar link nuts](#) Quantity: 2.
Torque: 185Nm

2.

Install the front wheel and tire assembly.

Refer to: [Wheel and Tire](#) (204-04 Wheels and Tires, Removal and Installation).