

PUBLISHED: 15-JUL-2019
2020.0 DEFENDER (LE), 204-02

REAR SUSPENSION

REAR STABILIZER BAR LINK (G2410712)

mcx30.com

REMOVAL AND INSTALLATION

PART(S)

STEP	PART NAME	QUANTITY
Installation Step 1	Stabilizer bar link nuts	2

REMOVAL



NOTES:


- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains illustrations for left side components, right side components are similar.

1. Raise and support the vehicle on a suitable 2 post lift.
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).
2. Remove the rear wheel.
Refer to: [Wheel and Tire](#) (204-04 Wheels and Tires, Removal and Installation).


3.

⚠ CAUTION:

Use a wrench on the hexagon provided to prevent the ball joint rotating.

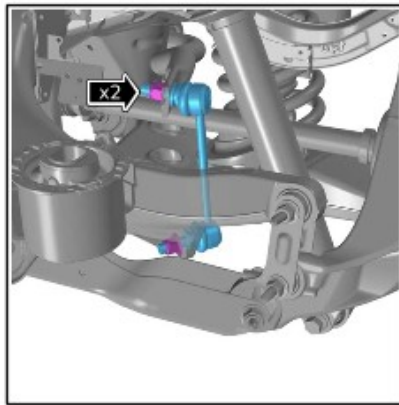

E250047

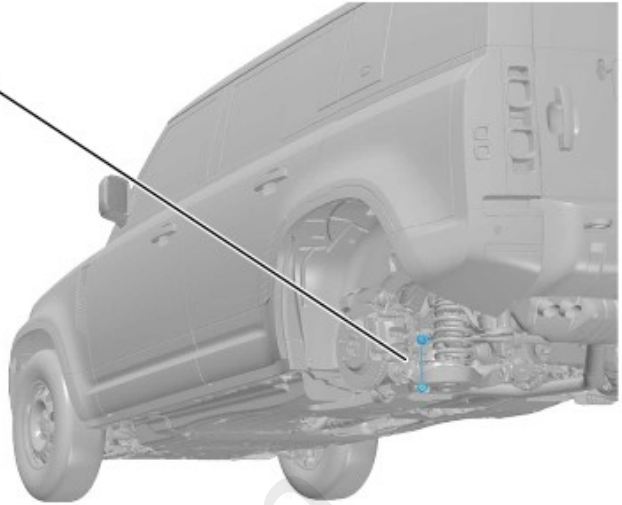

- Remove and discard the 2 nuts.
- Remove the rear stabilizer bar link.

INSTALLATION

1.

⚠ CAUTION:

Use a wrench on the hexagon provided to prevent the ball joint rotating.

- Install the rear stabilizer bar link.
- Install and tighten the 2 nuts.
*Renew Part: **Stabilizer bar link nuts** Quantity: **2**.*
*Torque: **185Nm***

2.

Install the rear wheel.

Refer to: [Wheel and Tire](#) (204-04 Wheels and Tires, Removal and Installation).