

PUBLISHED: 13-JAN-2020  
2020.0 DEFENDER (LE), 204-02

REAR SUSPENSION

**TIE-ROD** (G2430734)

mcx30.com

## REMOVAL

**⚠ CAUTION:**


Nuts and bolts must be tightened with vehicle at normal ride height.

**△ NOTE:**

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Raise and support the vehicle on a suitable 2-post lift.  
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).
2. Remove the rear wheel and tire assembly.  
Refer to: [Wheel and Tire](#) (204-04 Wheels and Tires, Removal and Installation).

3.

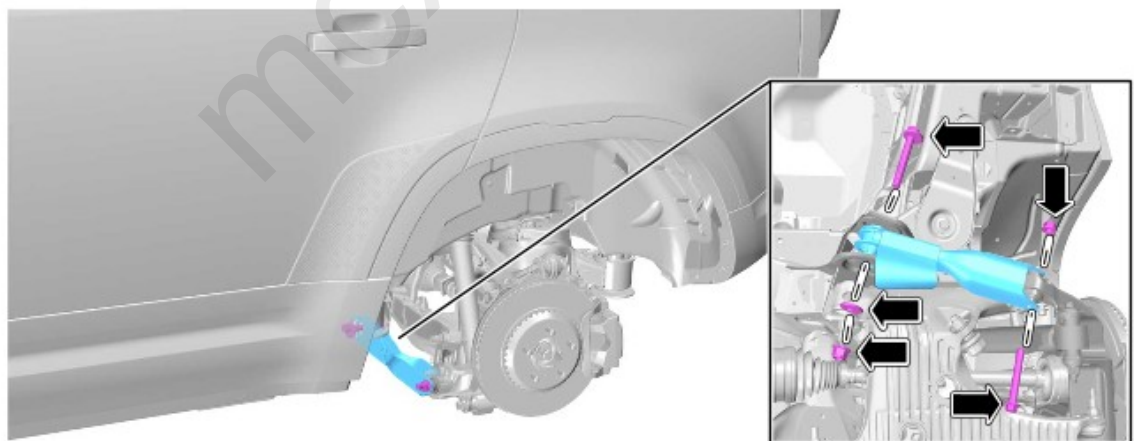

E255428

- Remove the 2 nuts and bolts.
- Remove the tie-rod.

## INSTALLATION

1.

- Install the tie-rod.
- Install and tighten the tie-rod to rear subframe nut and bolt.

*Torque*

Stage1: **40Nm**

Stage2: **90°**

- Install and tighten the tie-rod to rear wheel knuckle nut and bolt.

*Torque*

Stage1: **70Nm**

Stage2: **240°**

2.

Install the rear wheel and tire assembly.

Refer to: [Wheel and Tire](#) (204-04 Wheels and Tires, Removal and Installation).

3.

Use the Jaguar Land Rover (JLR) approved wheel alignment equipment, to check and adjust the 4 wheel alignment.

Refer to: [Wheel Alignment](#) (204-00 Suspension System - General Information, General Procedures).