

PUBLISHED: 22-JUL-2019
2020.0 DEFENDER (LE), 204-05

VEHICLE DYNAMIC SUSPENSION

AIR LINE CONNECTOR (G2414293)

mcx30.com

ACTIVATION


ⓘ CAUTIONS:

- Before disconnecting any components, make sure the area is clean and free from foreign material. When disconnected all openings must be sealed.
- Make sure the correct size and type of air line connector is installed.
- Do not reuse the air line connector. Always install a new air line connector every time it is released.

1.

ⓘ CAUTION:

Attempting to slide the collet from the air line will result in damage, make sure not to damage the airline.

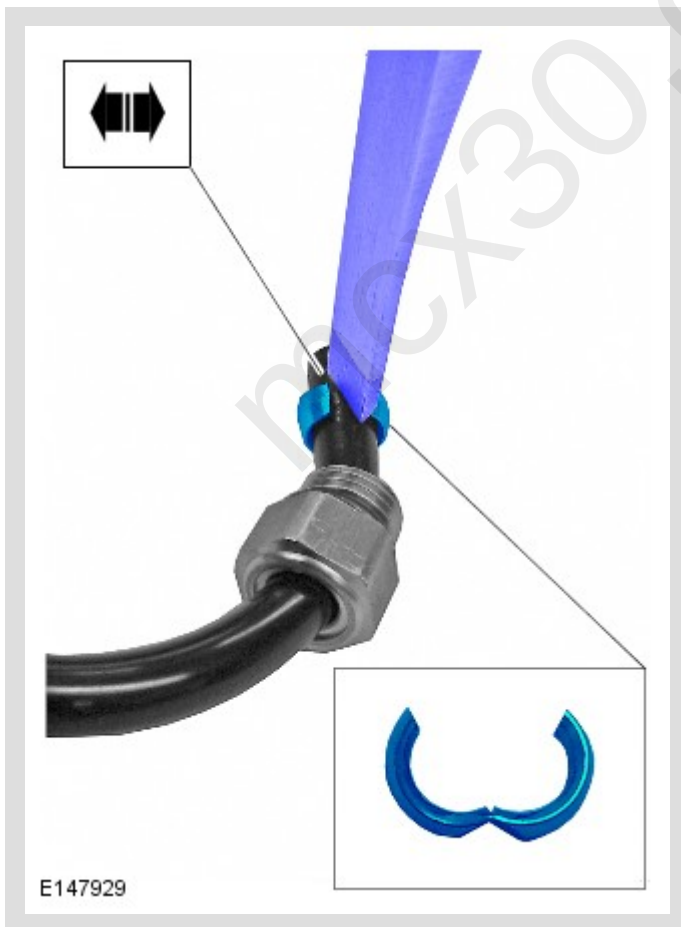


Use a suitable tool to remove the collet as illustrated.

2.



Remove the air line connector from the air line.


3.

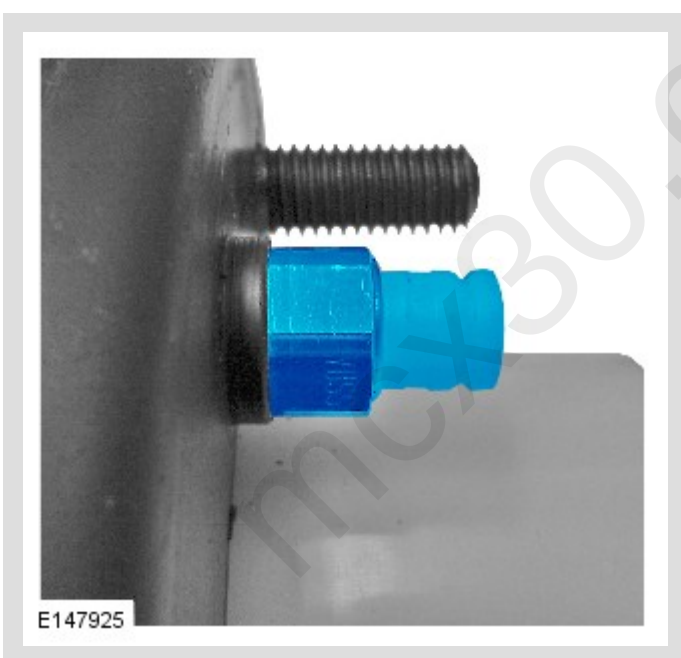

Install and fully tighten the new air line connector to the correct component's torque.

Refer to: [Specifications](#) (204-05 Vehicle Dynamic Suspension, Specifications).

4.

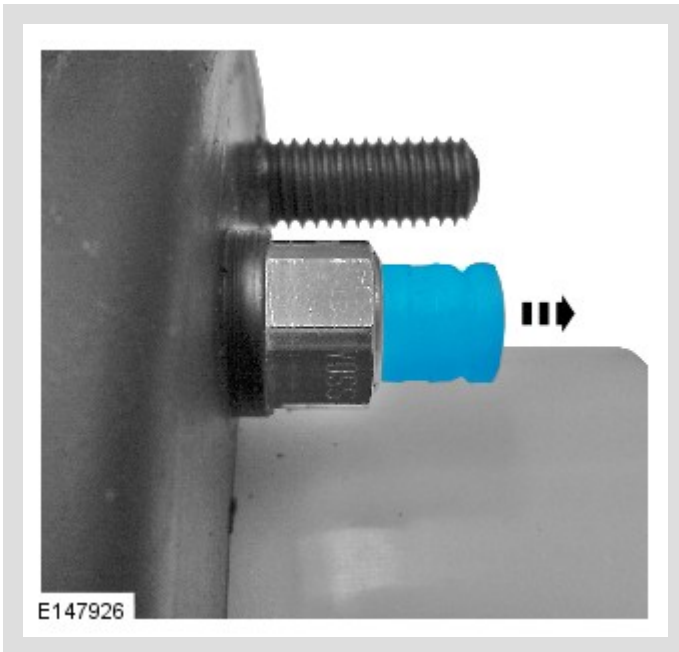


Remove the blanking cap from the air line connector.

5.

⚠ CAUTIONS:

- Make sure that the component is clean and free from foreign material.
- After the push-in process the lower of the two white insertion markings on the air line must not be visible.

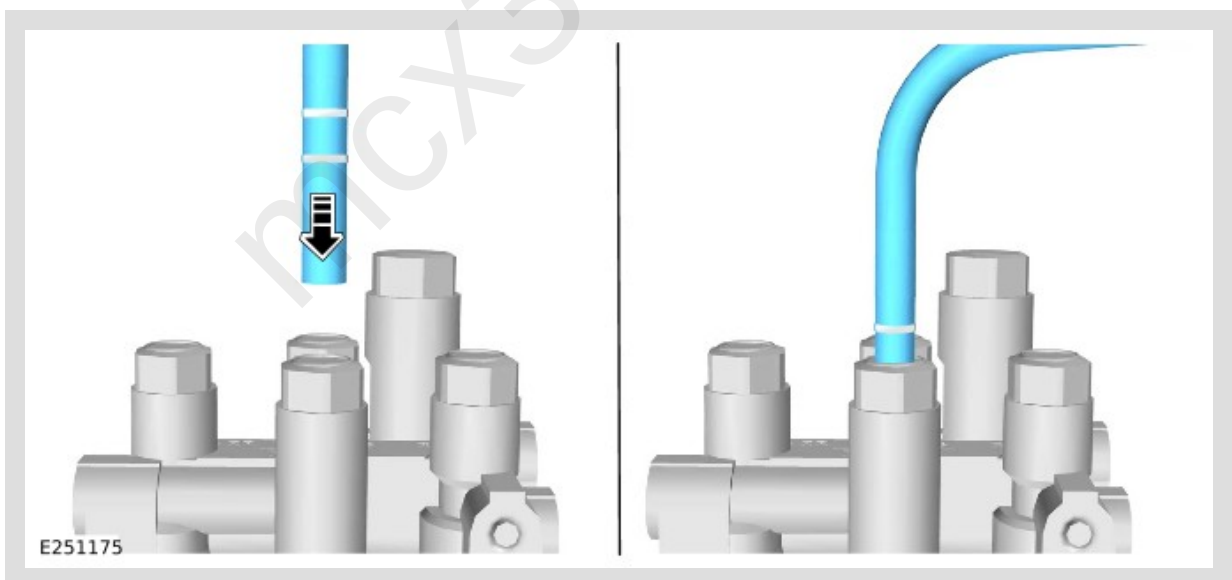

- Push the air line into the air line connector as far as it will go.
- Pull back on the air line ensuring connection of air line to air line connector is secure.

