

PUBLISHED: 16-SEP-2019
2020.0 DEFENDER (LE), 205-02

REAR DRIVE AXLE/DIFFERENTIAL

DIFFERENTIAL REAR BUSH (G2417640)

mcx30.com

mcx30.com

SPECIAL TOOL(S)



204-598-01

Remover/Installer, Subframe Bushing Guide

JLR-502-014



E148876

JLR-502-014

Remover/Installer Support, Bush

JLR-502-015



E148877

JLR-502-015

Installer, Bush

REMOVAL

NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.


1. Raise and support the vehicle on a suitable 2 post lift.
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).

2. Remove the rear differential.
Refer to: [Differential](#) (205-02 Rear Drive Axle/Differential, Removal and Installation).

3.  **CAUTION:**
Make sure that the special tool is correctly located.

NOTE:

Note the orientation of the bush before removal.

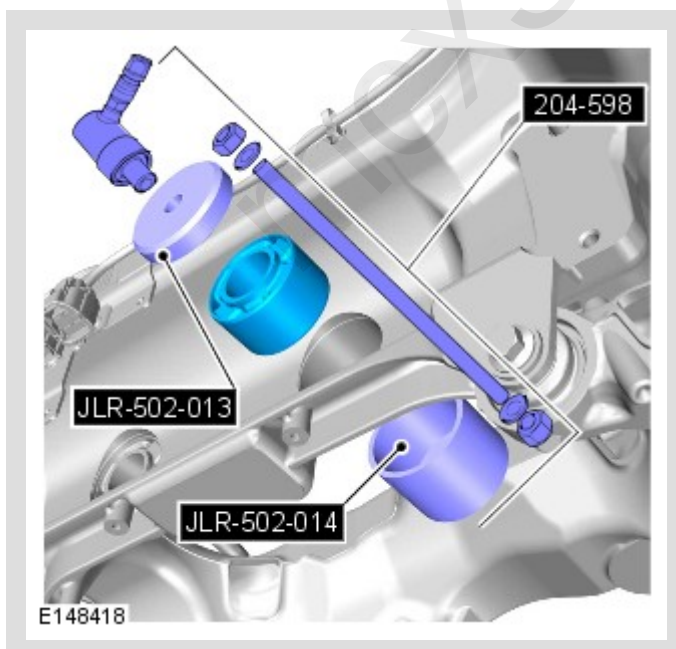


Use the special tools to remove the differential rear bush.

Install the Special Tool(s): [JLR-502-015](#), [204-598-01](#), [JLR-502-014](#)

INSTALLATION

1.

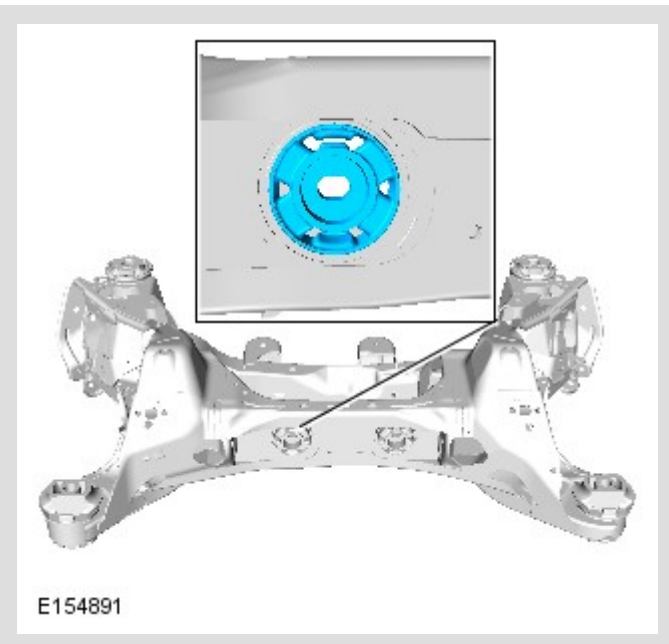


Make sure the new bush is installed in the correct orientation.

2.

ⓘ CAUTION:

- Make sure that the special tool is correctly located.
- Make sure the correct special tool is used to install the bush to the correct depth.

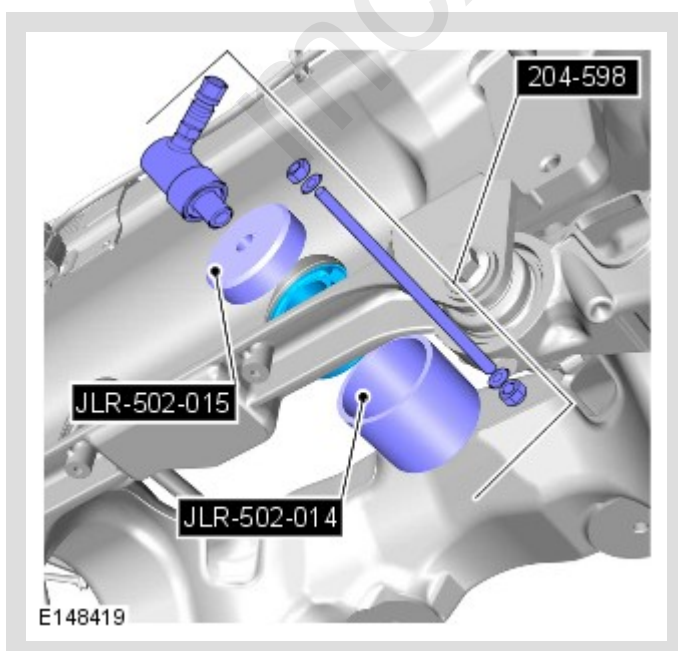

Use the special tools to install the differential rear bush.

Install the Special Tool(s): [JLR-502-015](#), [204-598-01](#), [JLR-502-014](#)

3. Install the rear differential.

Refer to: [Differential](#) (205-02 Rear Drive Axle/Differential, Removal and Installation).

cmjjaGFyZG1vbnRvbjsyMDIwLTA5LTEzVDA3OE00j11Jg4MFo7OTAuMTk5LjEyMS4xMTc7

mcx30.com