

FRONT DRIVE AXLE/DIFFERENTIAL (G2344326)

SPECIFICATIONS

Lubricants



NOTE:

Do not use any lubricant other than that specified

RECOMMENDED LUBRICANT	SPECIFICATION
Front differential	Castrol SAF-XO

Capacities


UNIT	SERVICE FILL CAPACITY	
Front differential: Wet	0.5 - 0.52 liters	1.05 - 1.09 pints
Front differential: Dry	0.53 - 0.55 liters	1.12 - 1.16 pints

Reduction Ratio

MODEL	SPECIFICATION
Vehicles with 2.0L diesel engine	3.73:1
Vehicles with 2.0L petrol engine	4.1:1
Vehicles with 3.0L petrol engine	3.55:1
Vehicles with 2.0L PHEV petrol engine	4.1:1

Torque Specifications

COMPONENT TORQUE LOCATION

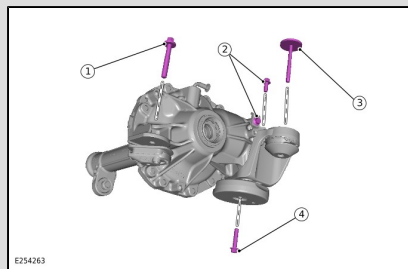

Item	Description	Nm	lb-ft
1	Differential front mounting bolt	110	81
2	Differential L bracket bolts	25	18
3	Differential upper support bracket bolt	60	44
4	Mass damper bolt	60	44


Torque Specifications



NOTE:

Numbers with a green background are a single use component.

COMPONENT TORQUE LOCATION

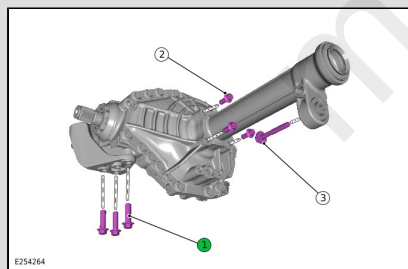

Item	Description	Nm	lb-ft
1	Differential lower support bracket bolts	90	66
2	Halfshaft support to differential bolts	50	36
3	Halfshaft support to subframe bolt	63	46


Torque Specifications



NOTE:

Numbers with a green background are a single use component.

COMPONENT TORQUE LOCATION

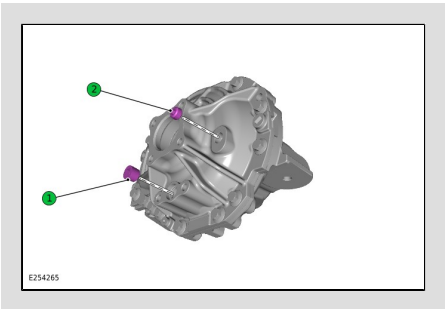

Item	Description	Nm	lb-ft
1	Differential drain plug	30	22
2	Differential filler plug	30	22

cmijaGFyZG1vnrRvbjsyMDiwlTA5LTEzVDA3QJE2OjA4LjczMFo7OTAuMTk5LjEyMS4xMTc7