

ELECTRONIC ENGINE CONTROLS – INGENIUM I6 3.0L PETROL

MASS AIR FLOW SENSOR (G2300699)

REMOVAL AND INSTALLATION

19.22.25	MASS AIR FLOW SENSOR – RENEW	2000 CC, INGENIUM DIESEL	0.10	USED WITHINS	
19.22.25	MASS AIR FLOW SENSOR – RENEW	2000 CC, INGENIUM PETROL	0.10	USED WITHINS	
19.22.25	MASS AIR FLOW SENSOR – RENEW	3000 CC, INGENIUM PETROL	0.10	USED WITHINS	


REMOVAL



NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- Left side shown, right side similar.

1.

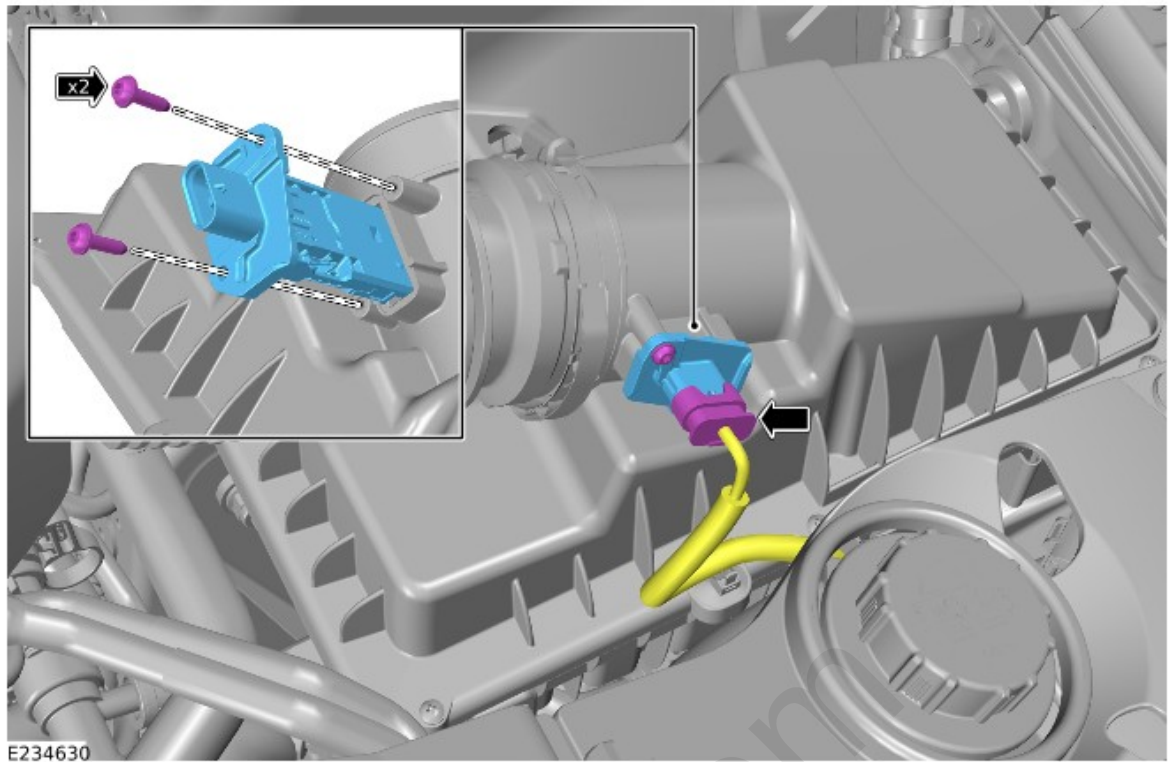

- Disconnect the Mass Air Flow (MAF) sensor electrical connector.
- Remove the 2 bolts.
- Remove the MAF sensor.

INSTALLATION

1.

ⓘ CAUTION:

Make sure that the mating faces are clean and free of foreign material.

- Install the MAF sensor.
- Install and tighten the 2 bolts.
Torque: 2Nm
- Connect the MAF sensor electrical connector.