

PUBLISHED: 07-FEB-2020
2020.0 DEFENDER (LE), 303-14B

ELECTRONIC ENGINE CONTROLS – INGENIUM I6 3.0L PETROL

LOWER HOSE COOLANT TEMPERATURE SENSOR

[G2325407]

mcx30.com

REMOVAL

 NOTE:

- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.

1. Raise and support the vehicle on a suitable 2 post lift.


Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).

2. Partially drain the cooling system.

Refer to: [Cooling System Partial Draining and Vacuum Filling](#) (303-03C Engine Cooling - INGENIUM I6 3.0 L Petrol, General Procedures).

⚠ WARNING:

Be prepared to collect escaping fluids.

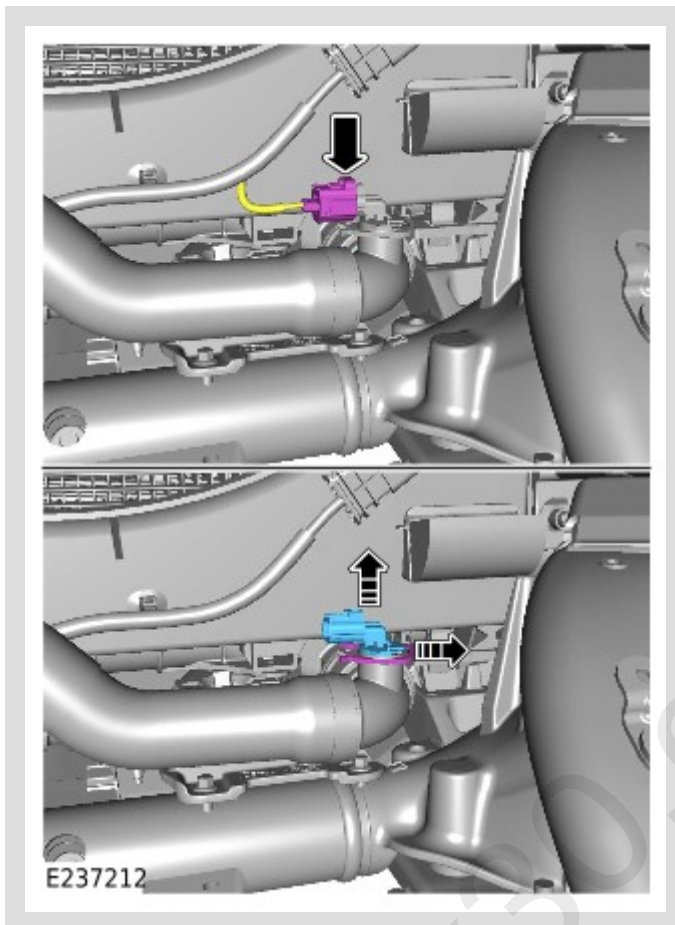

- Disconnect the electrical connector.
- Remove the lower hose coolant temperature sensor clip.
- Remove the lower hose coolant temperature sensor.

INSTALLATION

1.



WARNING:

Be prepared to collect escaping fluids.



CAUTION:

Make sure that the mating surfaces are clean and free from debris and foreign material.

- Install the lower hose coolant temperature sensor.
- Install the lower hose coolant temperature sensor clip.
- Make sure the clip is correctly installed.
- Connect the electrical connector.

2.

Vacuum fill the cooling system.

Refer to: [Cooling System Partial Draining and Vacuum Filling](#) (303-03C Engine Cooling - INGENIUM I6 3.0 L Petrol, General Procedures).