

PUBLISHED: 19-JAN-2020
2020.0 DEFENDER (LE), 310-02

ACCELERATION CONTROL

ACCELERATOR PEDAL (G2283749)

mcx30.com

REMOVAL

 NOTE:

- Left Hand Drive illustration(s) shown, Right Hand Drive is similar.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Disconnect the startup battery ground cable.


Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

- 2.




- Remove the 3 bolts.
- Remove the instrument panel lower trim.

3.

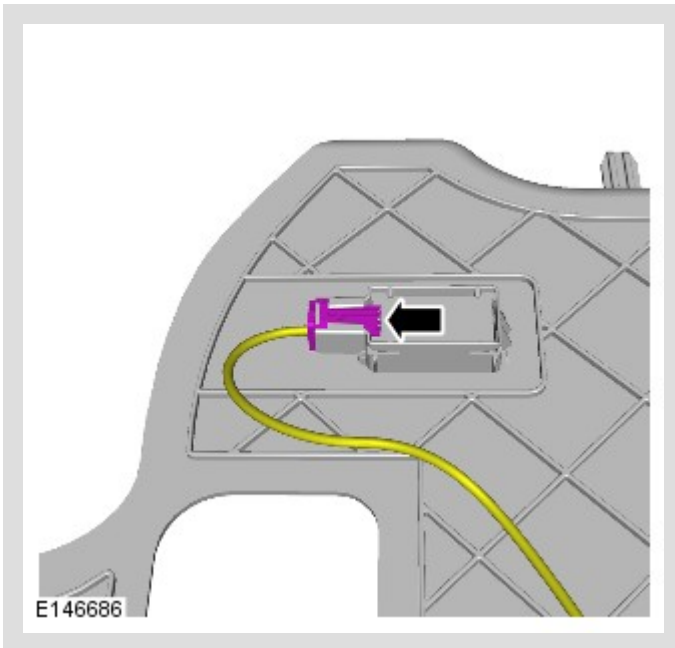

Disconnect the electrical connector from the footwell lamp.

4.

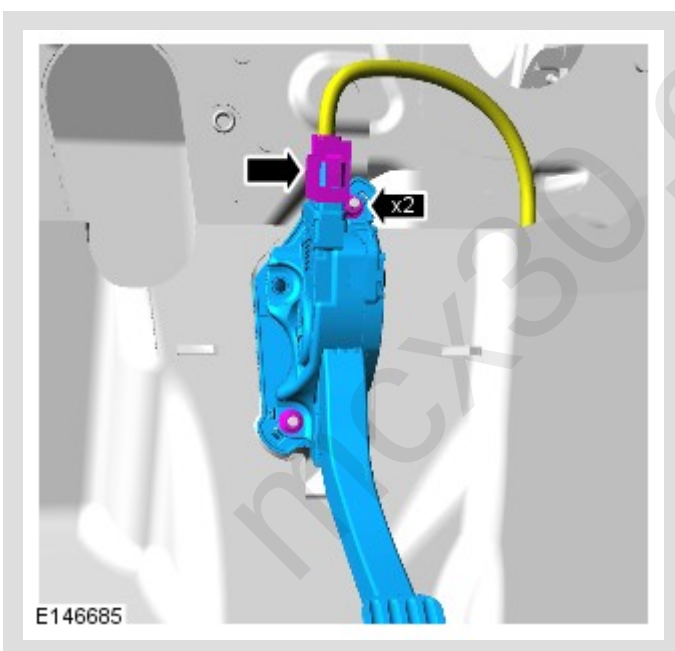

- Disconnect the electrical connector from the accelerator pedal.
- Remove the 2 nuts.
- Remove the accelerator pedal.

INSTALLATION

1.

- Install the accelerator pedal.
- Install and tighten the 2 nuts.
Torque: 9Nm
- Connect the electrical connector to the accelerator pedal.

2.

Connect the electrical connector to the footwell lamp.

3.

- Install the instrument panel lower trim.
- Install and tighten the 3 bolts.

4.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).