

PUBLISHED: 28-FEB-2020
2020.0 DEFENDER (LE), 310-03B

SPEED CONTROL – INGENIUM I6 3.0L PETROL

CRUISE CONTROL MODULE (G2469564)

mcx30.com

GENERAL EQUIPMENT

EQUIPMENT NAME

Jaguar Land Rover approved diagnostic equipment

REMOVAL

 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.


1. Disconnect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

2. Remove the radiator grille.

Refer to: [Radiator Grille](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).

3.

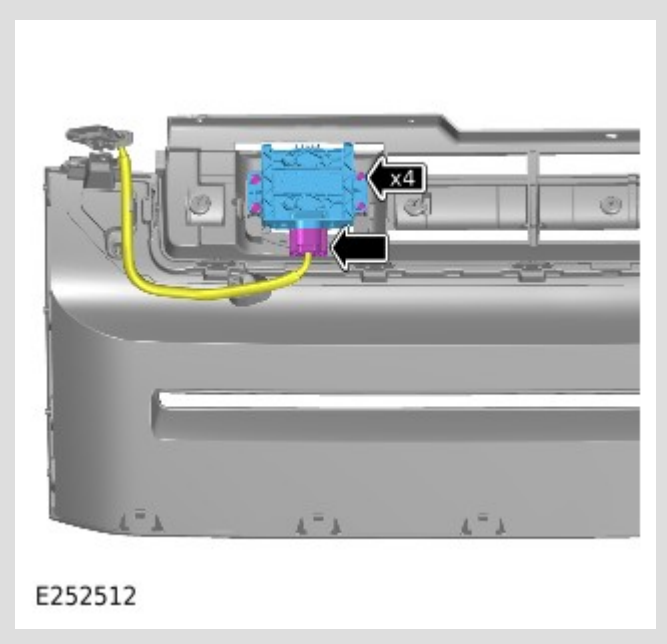

- Disconnect the electrical connector.
- Remove the 4 bolts.
- Remove the Cruise Control Module (CCM).

INSTALLATION

1.

- Install the CCM to the radiator grille.
- Install and tighten the 4 bolts.
Torque: 3Nm
- Connect the electrical connector to the CCM.

2.

Install the radiator grille.

Refer to: [Radiator Grille](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).

3.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

4.



NOTES:

- This step is only required if the component was removed for access.
- Choose a road with stationary objects on the roadside.
- Following vehicles too closely will obscure the stationary targets from the radar, a gap of 2 seconds is recommended.

1. Connect the Jaguar Land Rover (JLR) approved diagnostic equipment.
General Equipment: [Jaguar Land Rover approved diagnostic equipment](#)
2. Select 'Cruise Control Module [CCM] - Service Alignment Mode' from the diagnostic menu.
3. Make sure that all steps from the on-screen instructions are followed.

5.



NOTES:

- This step is only required if a new component is installed.
- Choose a road with stationary objects on the roadside.
- Following vehicles too closely will obscure the stationary targets from the radar, a gap of 2 seconds is recommended.

1. Connect the JLR approved diagnostic equipment.
General Equipment: [Jaguar Land Rover approved diagnostic equipment](#)
2. Select 'Cruise Control Module [CCM] - Replace ECU' from the diagnostic menu.
3. Make sure that all steps from the on-screen instructions are followed.

cmIjaGFyZG1vbnRvbjsyMDIwLTA5LTE3VDE5OjQ2OjI4LjU4MTc7OTAuMTk5LjEyMS4xMTc7

mcx30.com