

PUBLISHED: 16-SEP-2019
2020.0 DEFENDER (LE), 412-01

CLIMATE CONTROL

BLOWER (G2410290)

mcx30.com

REMOVAL


 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Disconnect the startup battery ground cable.


Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

- 2.

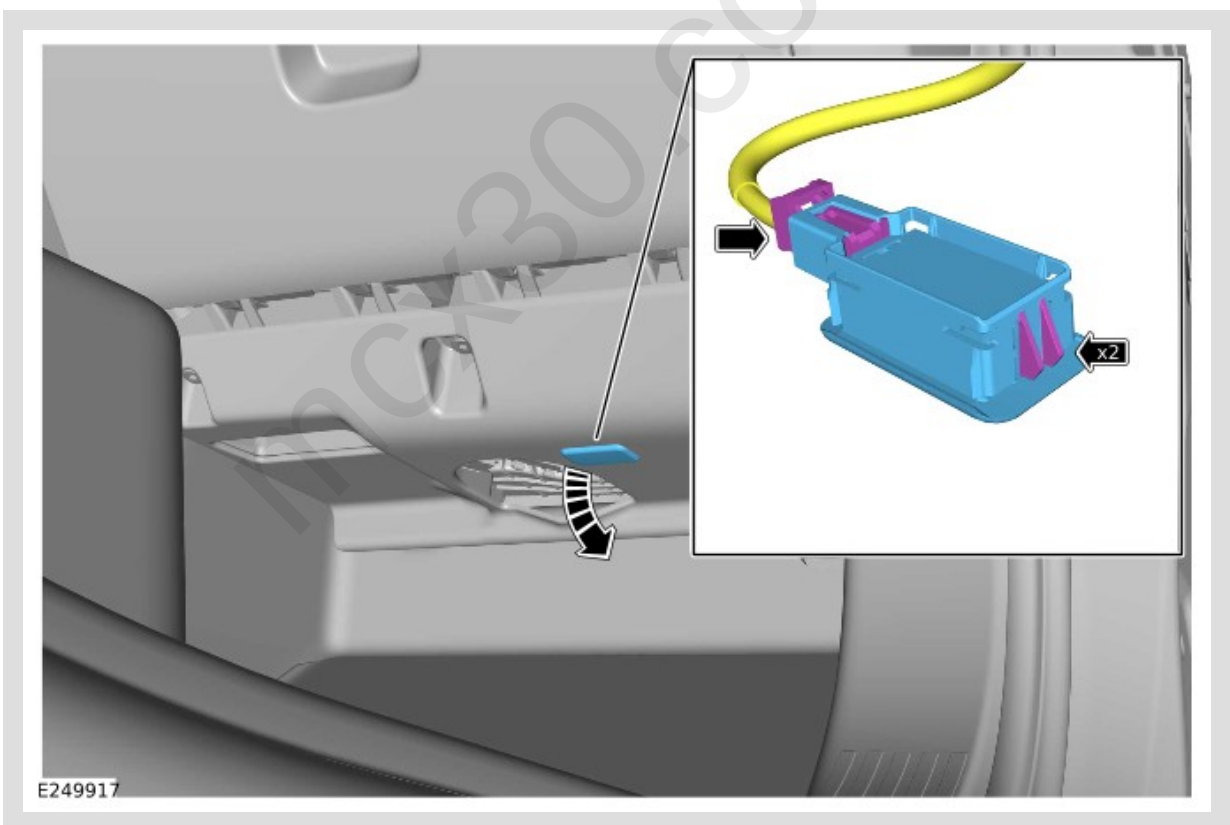


- Release the 2 clips.
- Disconnect the electrical connector from the footwell lamp.
- Remove the footwell lamp.

3.

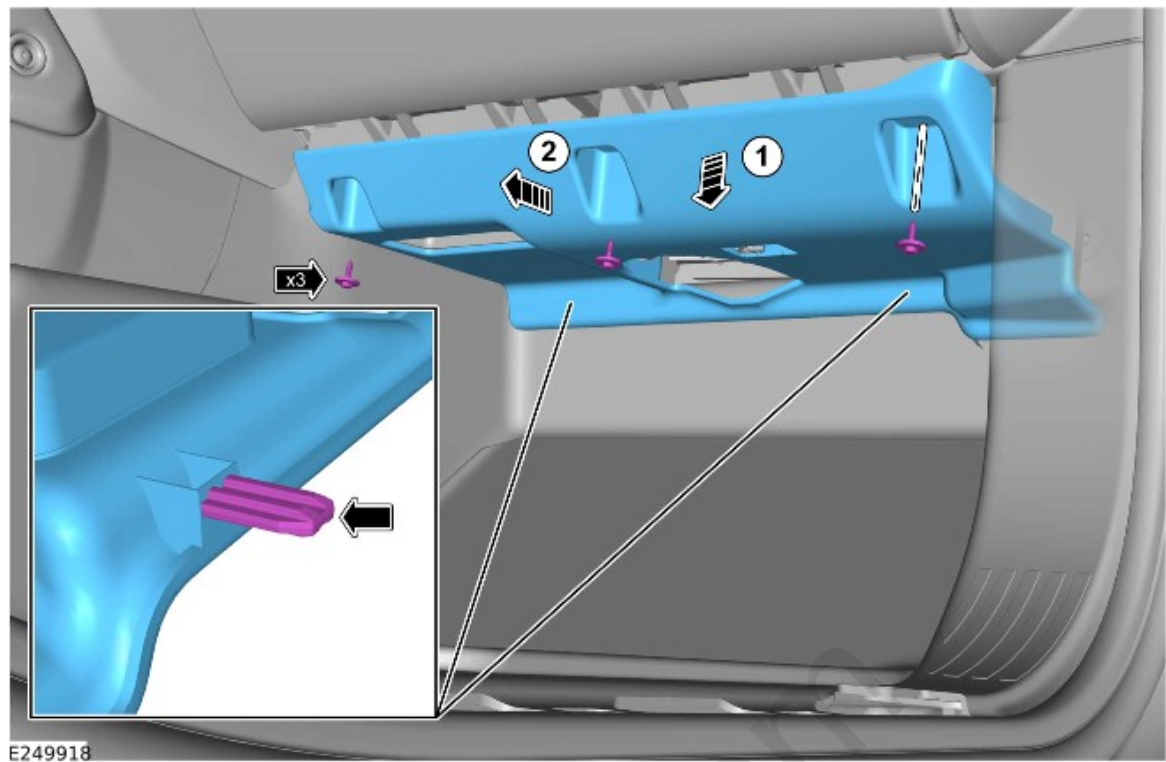

- Remove the 3 screws.
- Remove the passenger side footwell trim panel.

4.

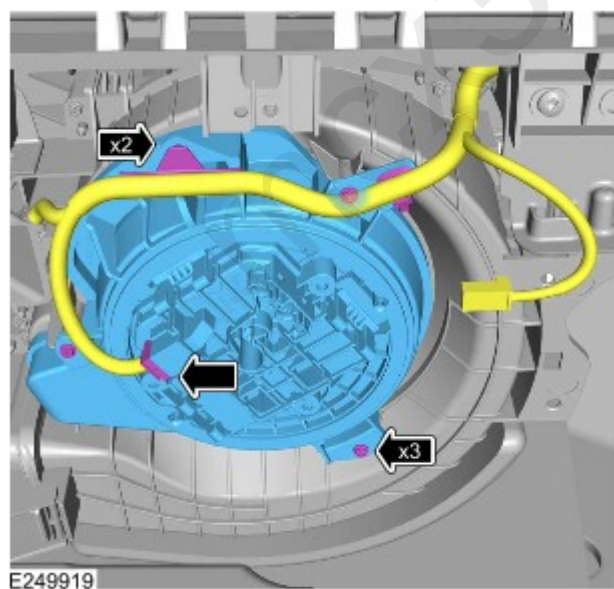

- Disconnect the electrical connector from the blower.
- Release the 2 wiring harness clips.
- Remove the 3 screws.
- Remove the blower.

INSTALLATION

- Install and tighten the 3 screws.

Torque: 1.2Nm

- Install the wiring harness to the 2 clips.

Connect the electrical connector to the blower.

2.

- Install the passenger side footwell trim panel.

- Install and tighten the 3 screws.

Torque: 5Nm

3.

- Connect the electrical connector to the footwell lamp.

- Install the footwell lamp.

4.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).