

PUBLISHED: 30-JUL-2019
2020.0 DEFENDER (LE), 412-01

CLIMATE CONTROL

FRONT SUNLOAD SENSOR (G2323717)

mcx30.com

REMOVAL


 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1.

 CAUTIONS:

- Take extra care not to damage the component.
- Do not use metal tools during this operation, removal of the component(s) must be carried out with a plastic trim tool.

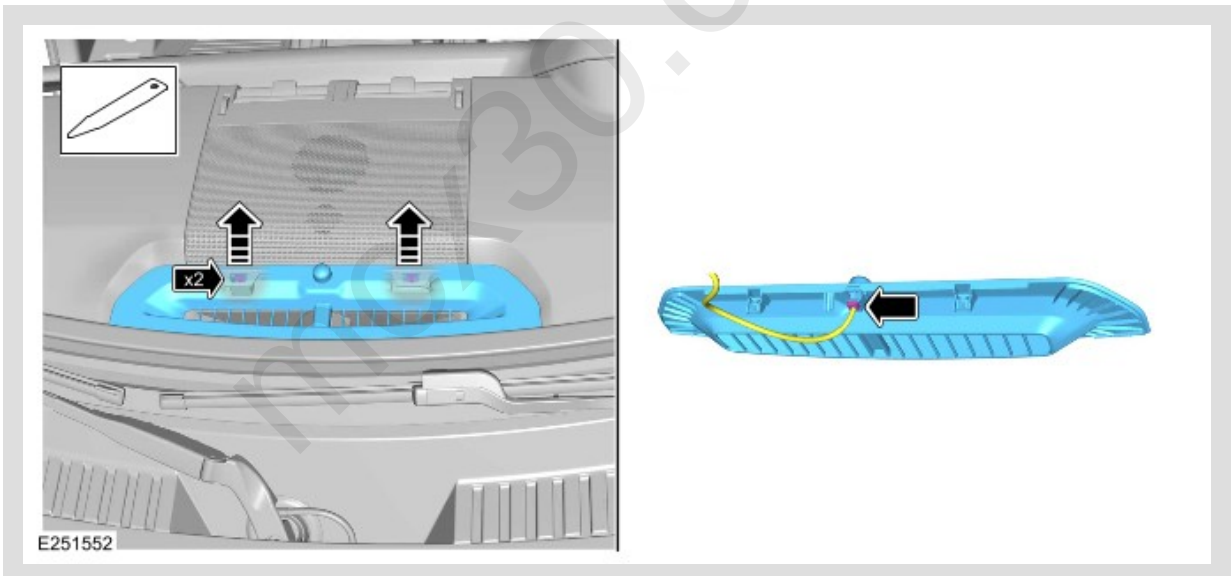


- Use a suitable plastic trim tool to remove the demist vent at the 2 clips.
- Disconnect the electrical connector from the sunload sensor.

2.

 NOTE:

Make sure that the domed cap is used to remove the sunload sensor.

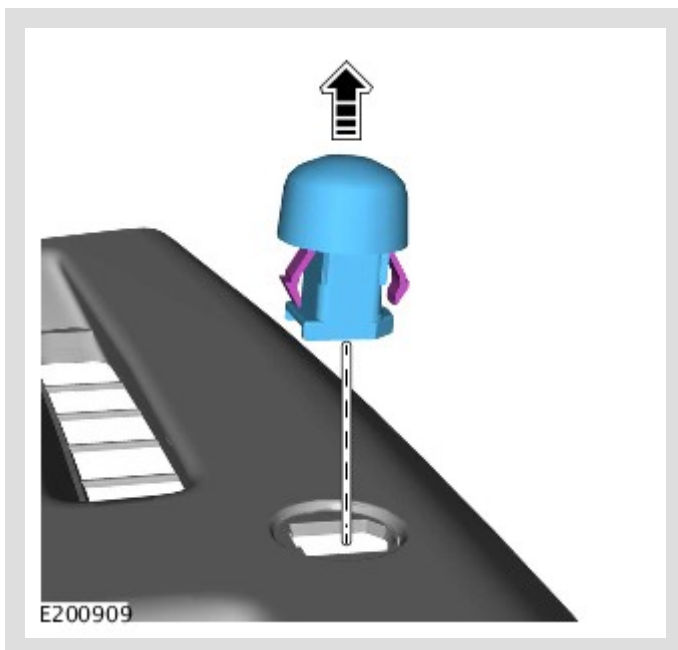

Remove the sunload sensor at the 2 clips.

INSTALLATION

1.

 NOTE:

Make sure that the domed cap is used to install the sunload sensor.

Install the sunload sensor at the 2 clips.

2.

- Connect the electrical connector to the sunload sensor.
- Install the demist vent at the 2 clips.