

PUBLISHED: 30-JUL-2019
2020.0 DEFENDER (LE), 412-01

CLIMATE CONTROL

IN-VEHICLE TEMPERATURE SENSOR (G2323721)


mcx30.com

REMOVAL

 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.


1.

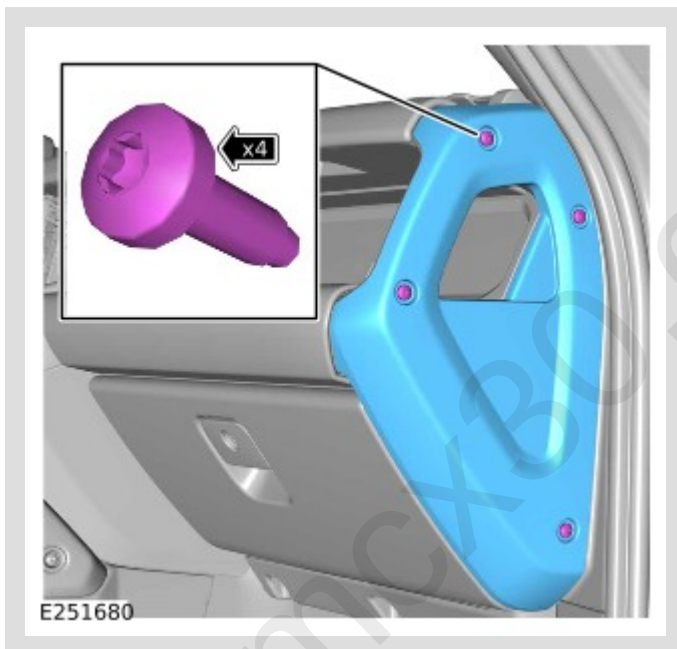

- Remove the 4 bolts.
- Remove the instrument panel passenger side trim.


ⓘ CAUTION:

Take extra care not to damage the component.

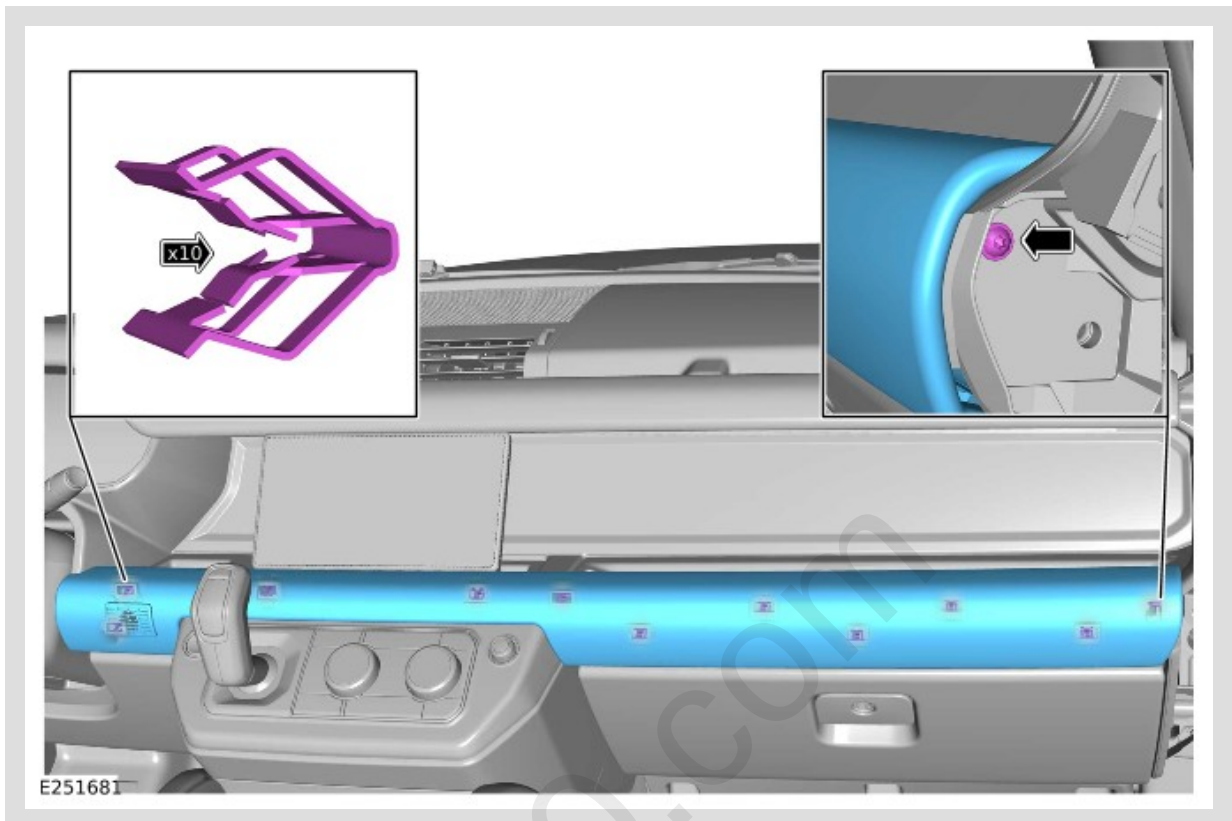

- Remove the bolt.
- Remove the instrument panel lower surround trim at the 10 clips.

3.

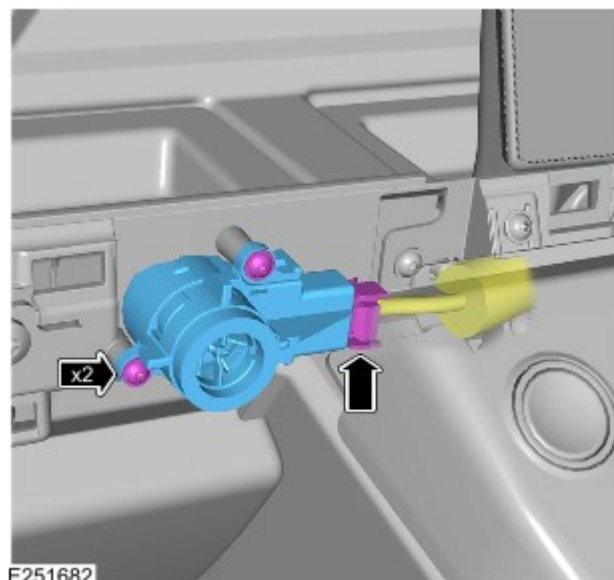

- Disconnect the electrical connector from the in-vehicle temperature sensor.
- Remove the 2 screws.
- Remove the in-vehicle temperature sensor.

INSTALLATION

1.

- Install the in-vehicle temperature sensor.
- Install and tighten the 2 screws.
Torque: 1Nm
- Connect the electrical connector to the in-vehicle temperature sensor.

2.

- Install the instrument panel lower surround trim to the 10 clips.
- Install and tighten the bolt.
Torque: 1.7Nm

3.

- Install the instrument panel passenger side trim.
- Install and tighten the 4 bolts.
Torque: 2.5Nm