

PUBLISHED: 30-AUG-2019
2020.0 DEFENDER (LE), 413-06

HORN (G2323751)

mcx30.com

REMOVAL

 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains illustrations for right side components, left side components are similar.


1. Disconnect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

2. Remove the radiator grille.

Refer to: [Radiator Grille](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).

- 3.

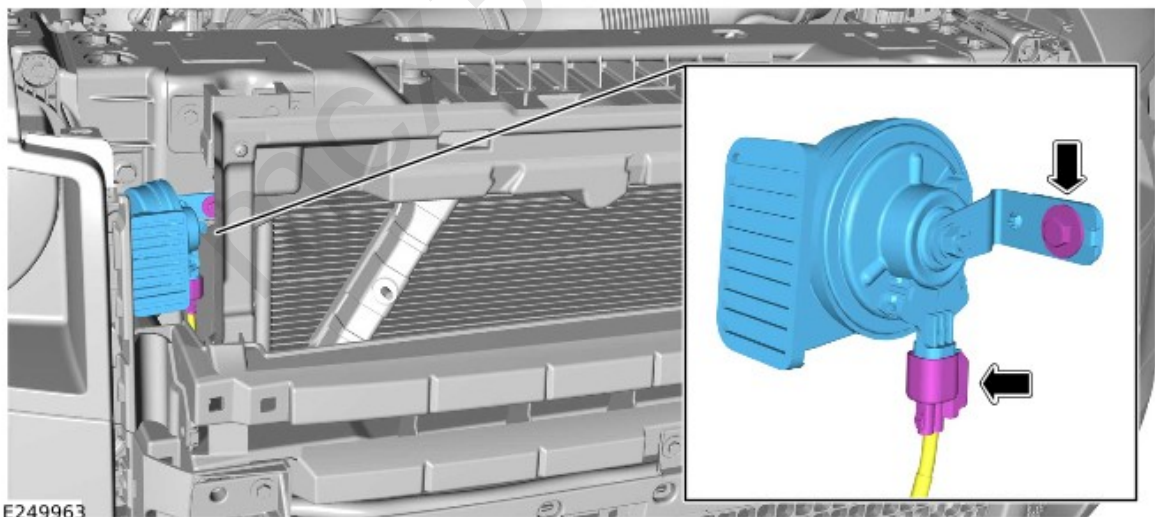

- Disconnect the electrical connector.
- Remove the bolt.
- Remove the horn assembly.

INSTALLATION

1.

- Install the horn assembly.
- Install and tighten the bolt.
Torque: 9Nm
- Connect the electrical connector.

2.

Install the radiator grille.

Refer to: [Radiator Grille](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).

3.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).