

PUBLISHED: 11-SEP-2019
2020.0 DEFENDER (LE), 413-09

WARNING DEVICES

DOOR MIRROR WADE SENSOR (G2323755)

mcx30.com

REMOVAL



 NOTE:

- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.

1. Remove the door mirror cover.


Refer to: [Door Mirror Cover](#) (501-09 Rear View Mirrors, Removal and Installation).

- 2.

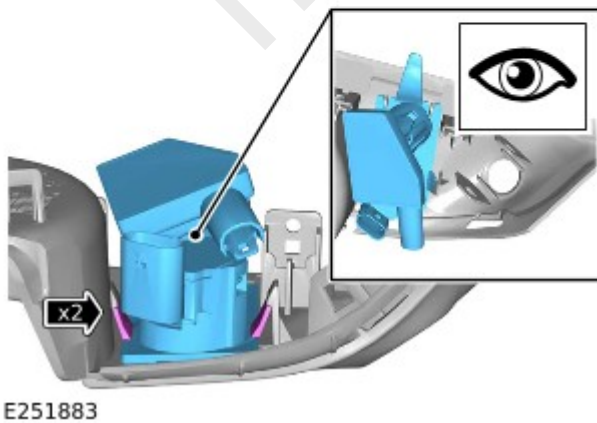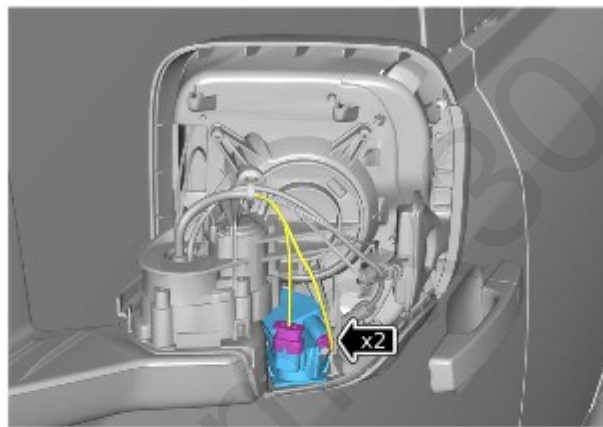


- Disconnect the 2 electrical connectors.
- Release the 2 clips.
- Remove the assembly.

3.

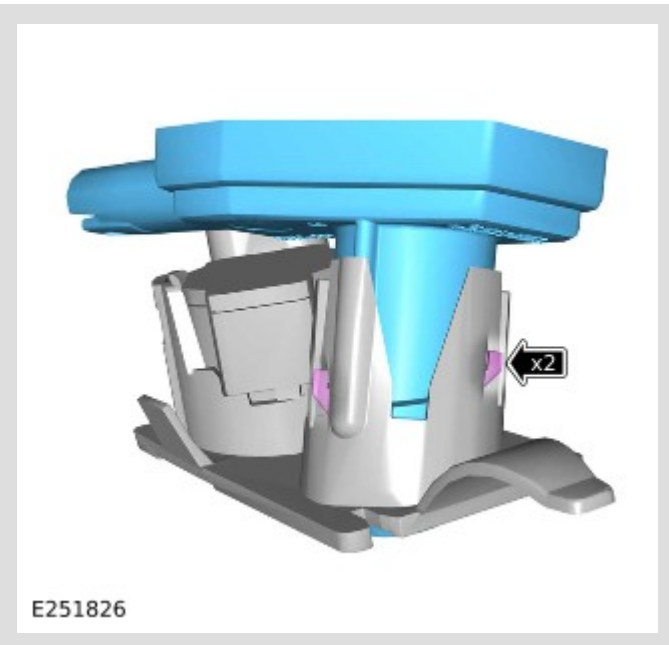

- Release the 2 clips.
- Remove the approach lamp.


4.

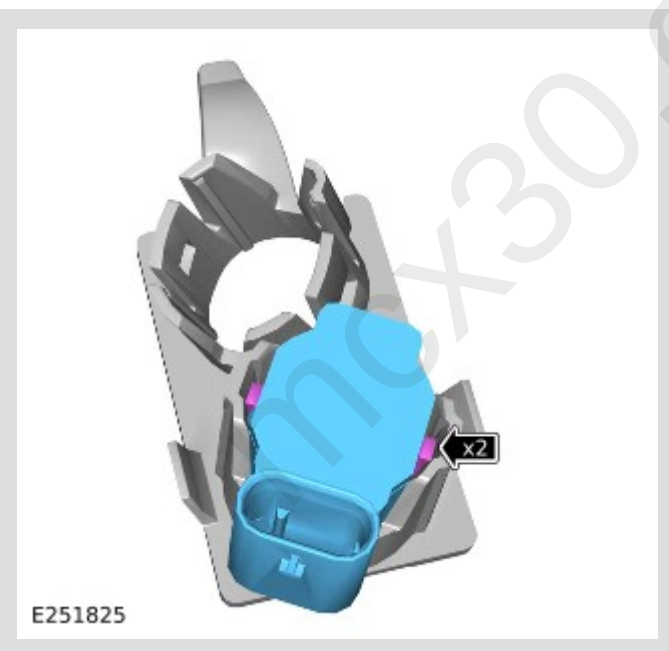

- Release the 2 clips.
- Remove the door mirror wade sensor.


INSTALLATION

1.

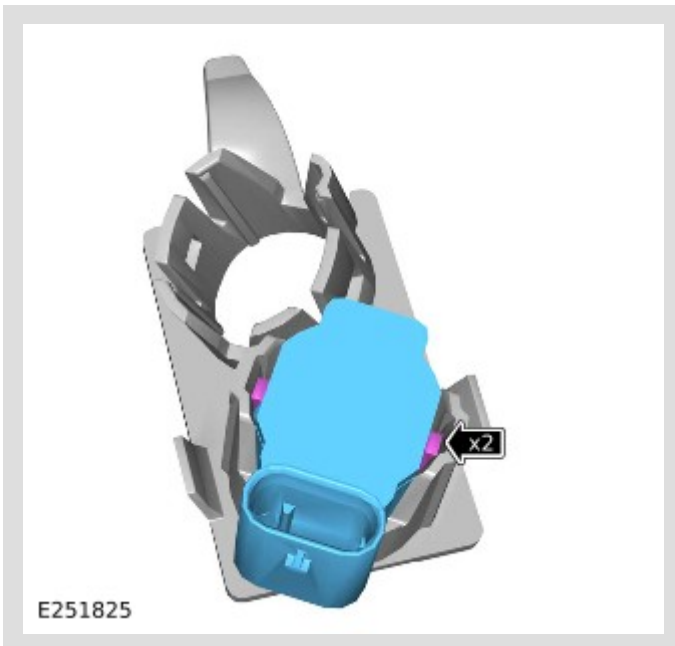


- Install the door mirror wade sensor.
- Secure the 2 clips.

2.

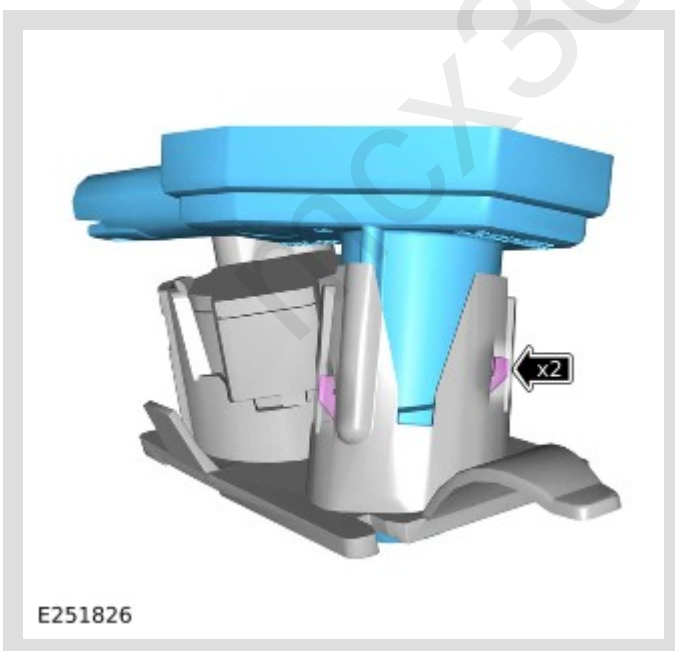

- Install the approach lamp.
- Secure the 2 clips.

3.

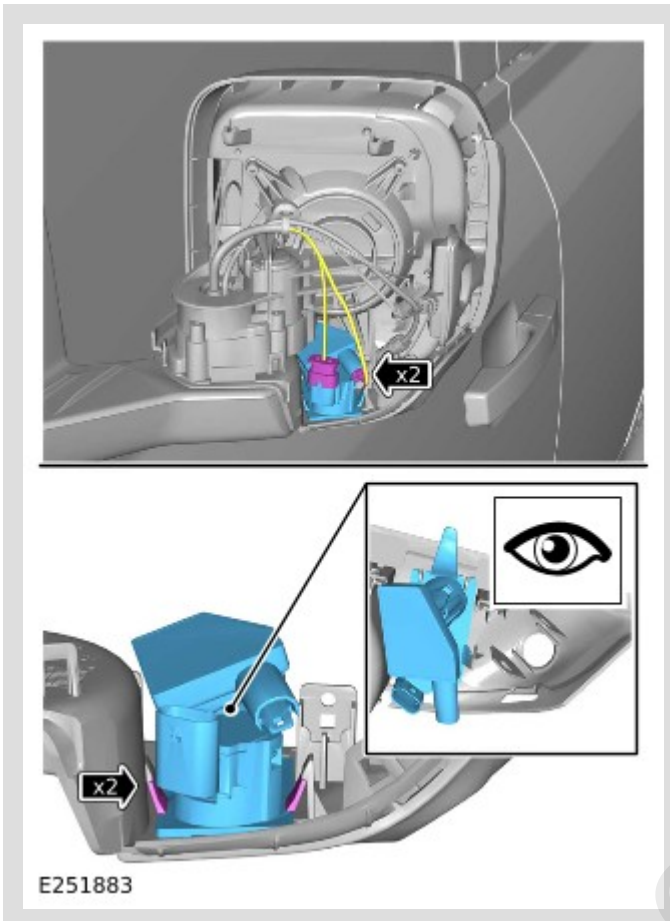

- Install the assembly.
- Secure the 2 clips.
- Connect the 2 electrical connectors.

4.

Install the door mirror cover.

Refer to: [Door Mirror Cover](#) (501-09 Rear View Mirrors, Removal and Installation).