

PUBLISHED: 02-AUG-2019
2020.0 DEFENDER (LE), 414-00

BATTERY AND CHARGING SYSTEM - GENERAL INFORMATION

STARTUP BATTERY DISCONNECT AND CONNECT

[G2390411]

mcx30.com

mcx30.com


CHECK

NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.


1. Always refer to the health and safety precautions before carrying out this procedure.
Refer to: [Health and Safety Precautions](#) (100-00 General Information, Description and Operation).
2. Note the preset radio frequencies.

3.

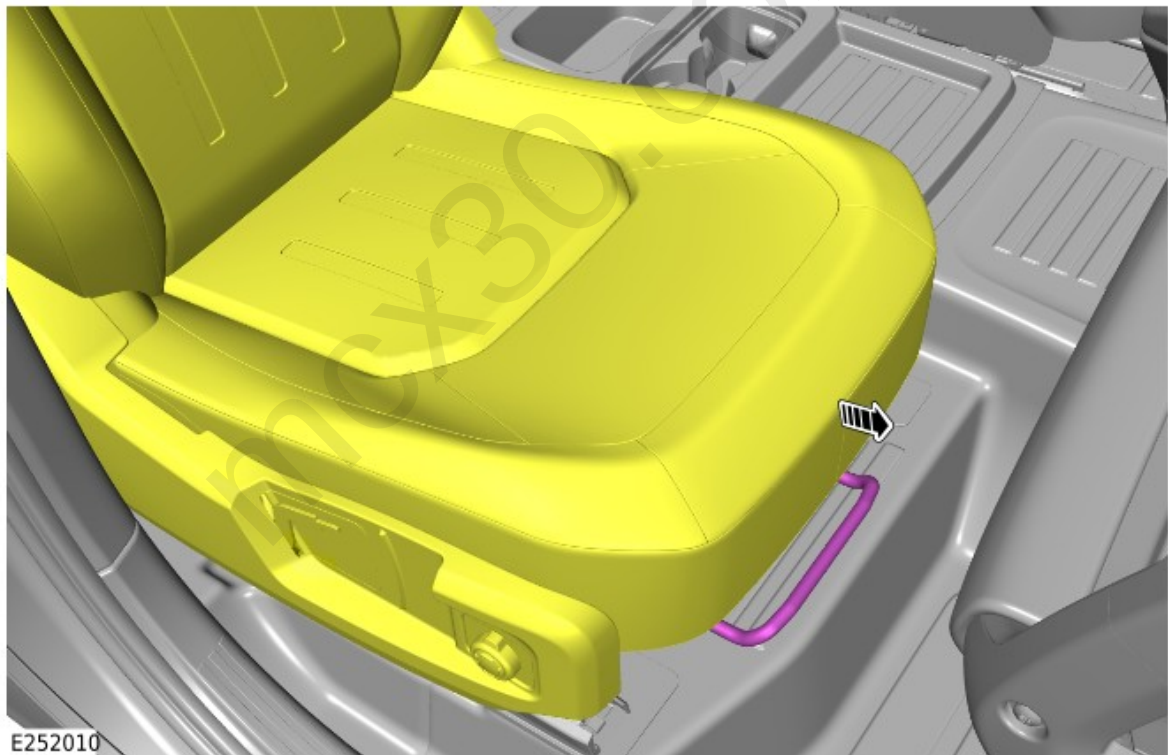


- Note the position of the front row right seat.
- Reposition the front row right seat to get access to the startup battery access cover.

4.

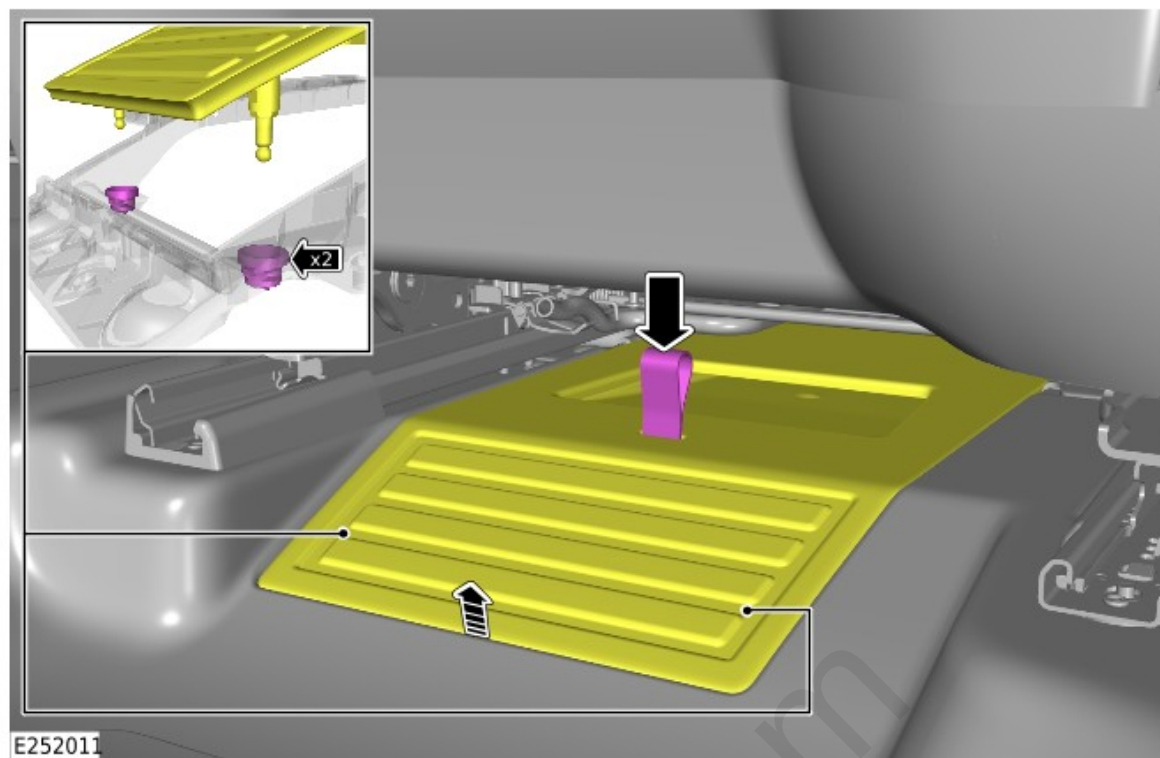


- Release the access cover from the 2 grommets.
- Reposition the access cover.

5.

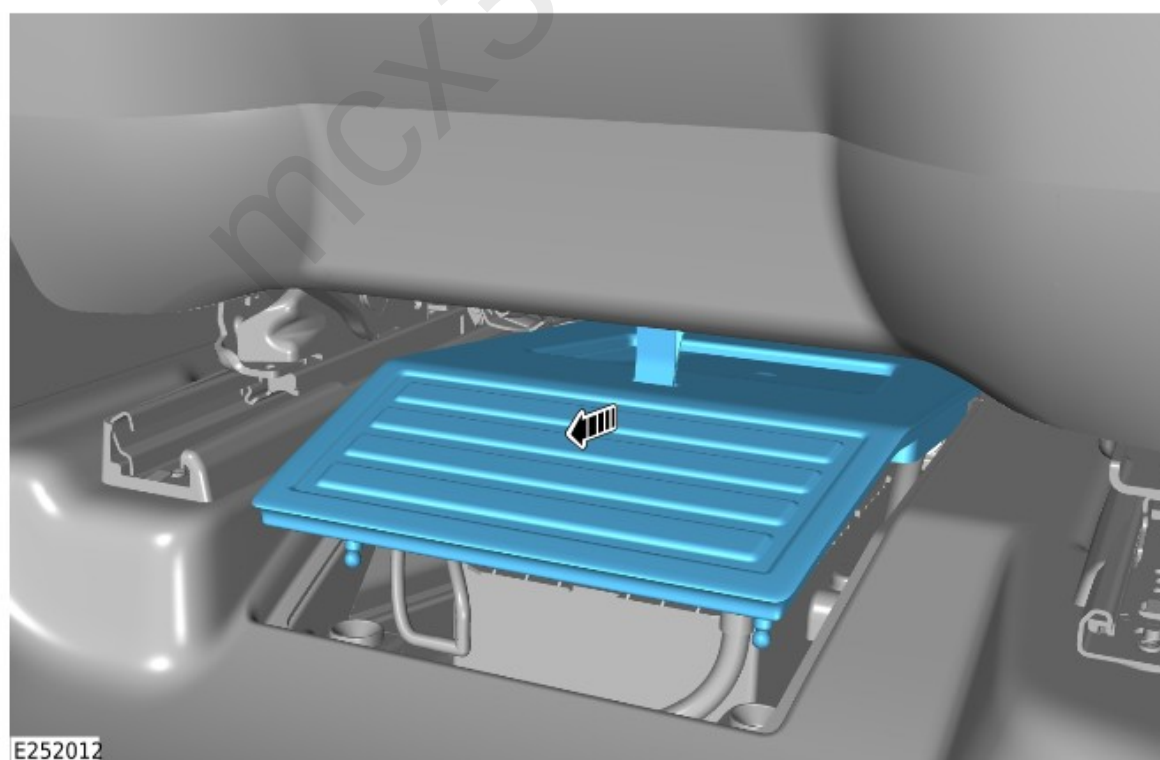

Remove the access cover.

6.

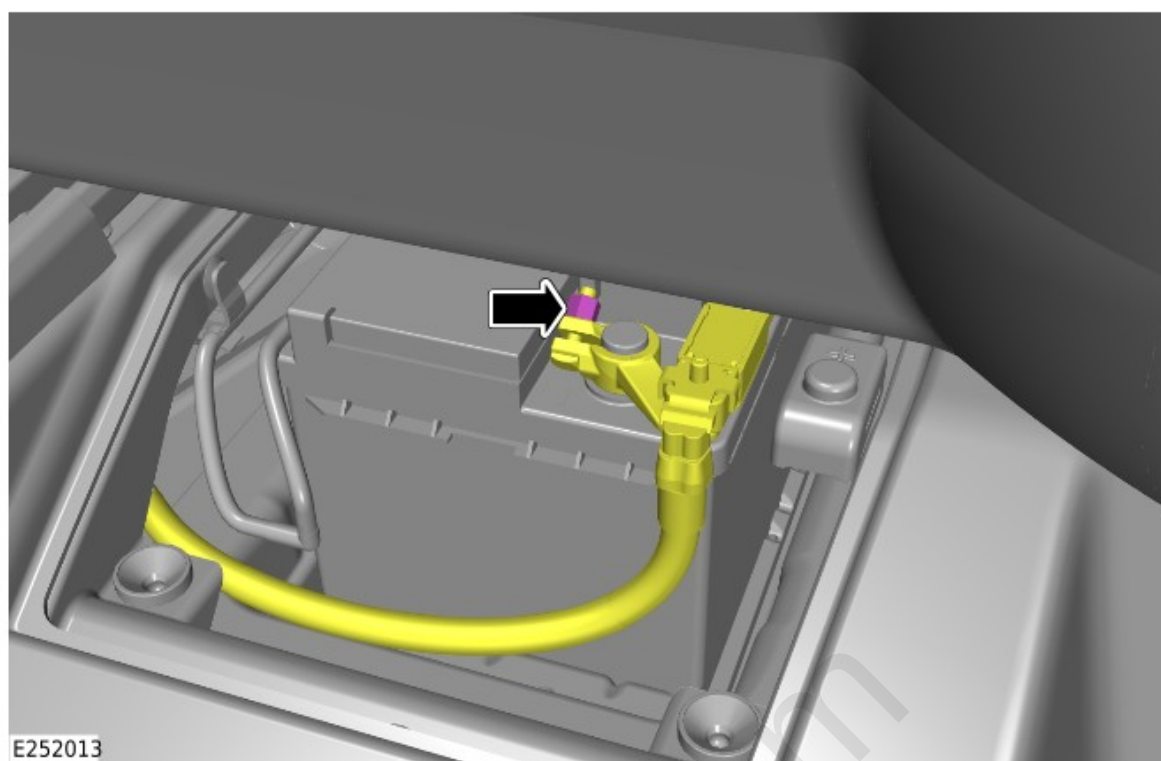


- Loosen, but do not fully remove the nut(s).
- Disconnect the startup battery ground cable.

ADJUSTMENT

1.

ⓘ CAUTION:

Make sure the startup battery ground cable is correctly installed.

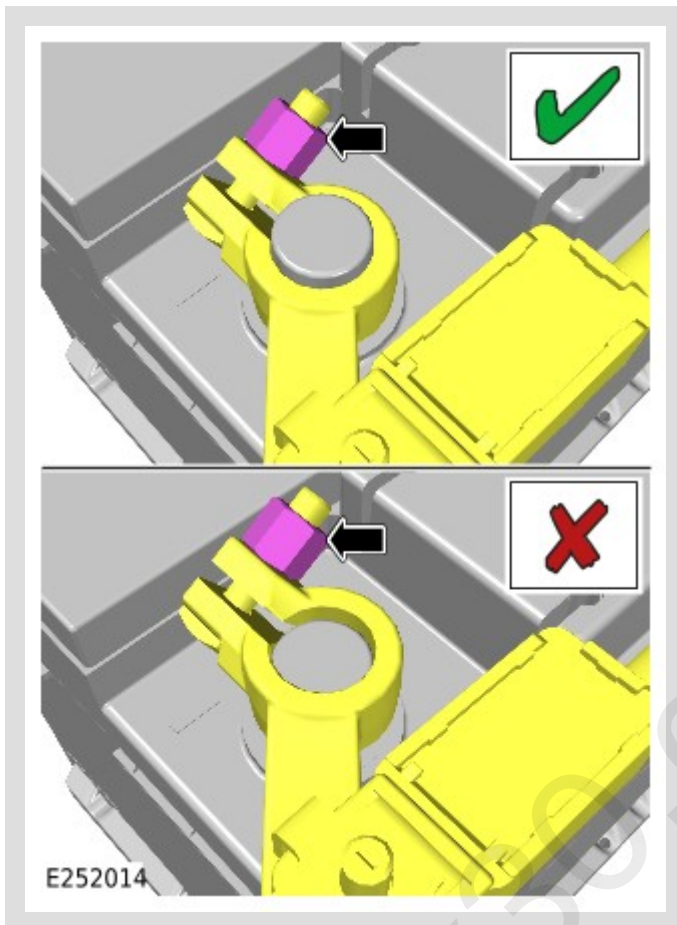

1. Connect the startup battery ground cable.
2. Tighten the nut(s).
Torque: 6Nm

2. Install the access cover.

3. Reposition the front row right seat to the noted position.

4. Complete the door window motor initialization procedure.

5. Enter the preset radio frequencies.

6. Reset the clock to the correct time.

mcx30.com