

PUBLISHED: 02-MAR-2020
2020.0 DEFENDER (LE), 415-01

INFORMATION AND ENTERTAINMENT SYSTEM

TELEMATICS 4G ANTENNA (G2413593)

mcx30.com

REMOVAL


 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- The telematics 4G antenna is an integral component of the roof pod and cannot be serviced separately.

1. Remove the headliner.

Refer to: [Headliner - 110](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

- 2.

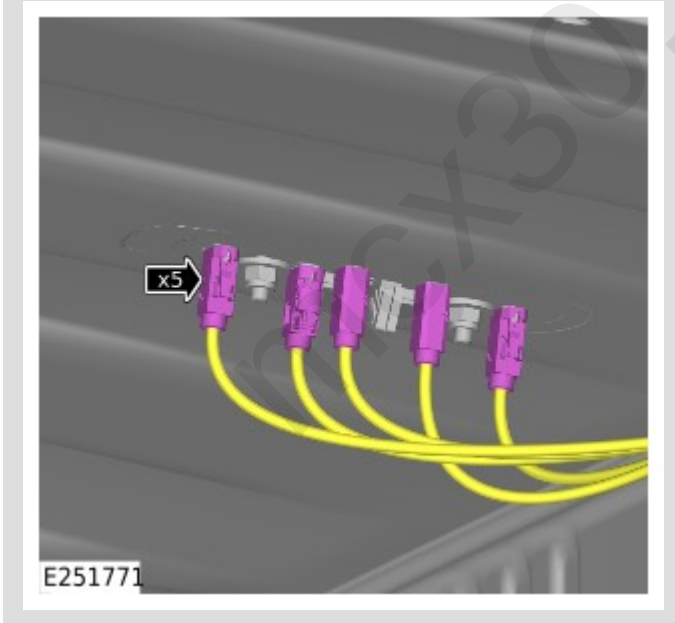


Disconnect the 5 electrical connectors.

3.



Remove the 2 nuts.

4.

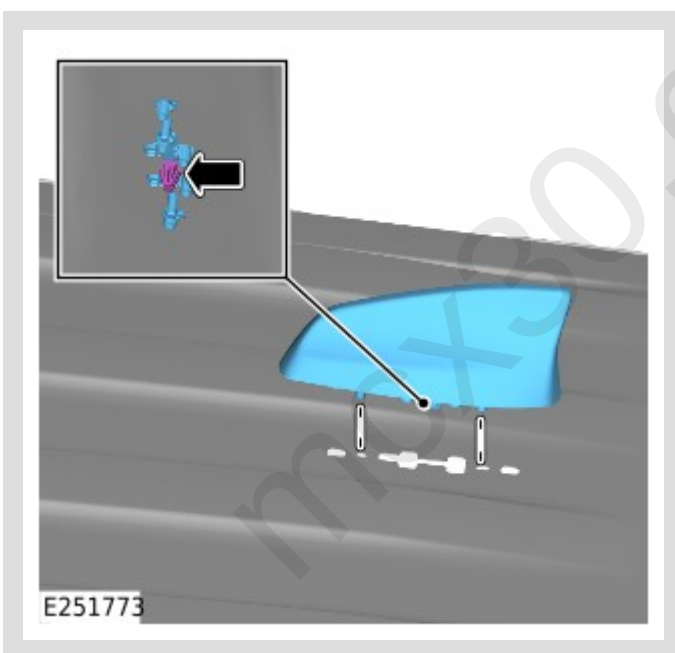

- Carefully release the clip.
- Remove the telematics 4G antenna.

INSTALLATION

1. Install the telematics 4G antenna.

2. Install and tighten the 2 nuts.

Torque: 10Nm

3. Connect the 5 electrical connectors to the roof pod .

4. Install the headliner.

Refer to: [Headliner - 110](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

cmjjaGFyZG1vbnRvbjsyMDIwLTA5LTE4VDEwOjA4OQ1LjkwM1o7OTluNDAuMTg5LjUzOw==

mcx30.com