

PUBLISHED: 09-JAN-2020
2020.0 DEFENDER (LE), 415-01

INFORMATION AND ENTERTAINMENT SYSTEM

AM/FM ANTENNA AMPLIFIER (G2413595)

mcx30.com

REMOVAL


 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Remove the headliner.



Refer to: [Headliner - 110](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

- 2.

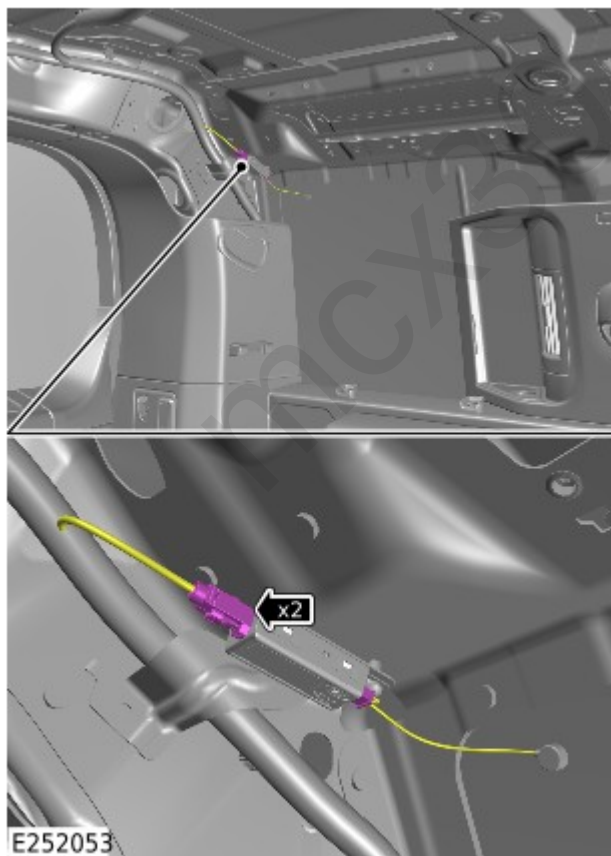

Disconnect the 2 electrical connectors.

3.

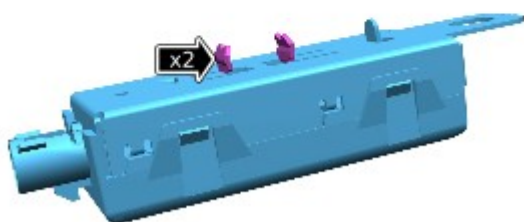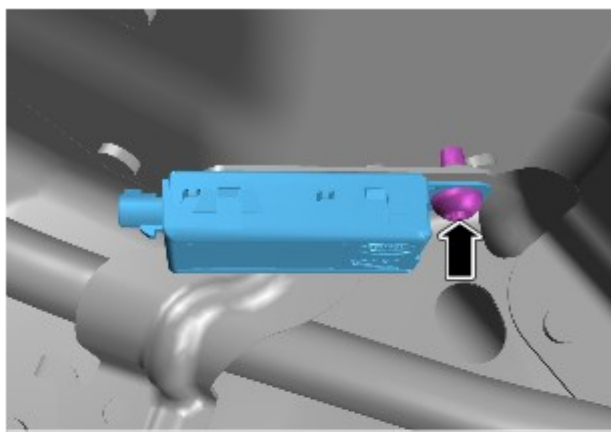

E252054

- Remove the bolt.
- Release the 2 clips.
- Remove the AM/FM antenna amplifier.

INSTALLATION

1.

- Install the AM/FM antenna amplifier.
- Install and tighten the bolt.

Torque: 4.8Nm

2.

Connect the 2 electrical connectors to the AM/FM antenna amplifier.

3.

Install the headliner.

Refer to: [Headliner - 110](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).