

PUBLISHED: 19-NOV-2019
2020.0 DEFENDER (LE), 415-01

INFORMATION AND ENTERTAINMENT SYSTEM

GNSS SIGNAL SPLITTER ASSEMBLY (G2413598)

mcx30.com

REMOVAL


 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Remove the left loadspace trim panel.

Refer to: [Left Loadspace Trim Panel - \[+\] 7 Seat Configuration, 110](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

- 2.

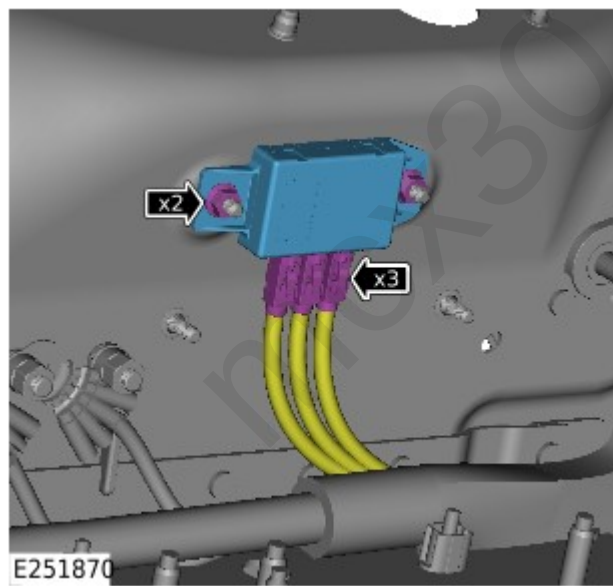

- Disconnect the 3 electrical connectors.
- Remove the 2 nuts.
- Remove the Global Navigation Satellite System (GNSS) signal splitter.

INSTALLATION

1.

- Install the Global Navigation Satellite System (GNSS) signal splitter.
- Install and tighten the 2 nuts.
Torque: 5Nm
- Connect the 3 electrical connectors to the GNSS signal splitter.

2.

Install the left loadspace trim panel.

Refer to: [Left Loadspace Trim Panel - \[+\] 7 Seat Configuration, 110](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).