

PUBLISHED: 21-AUG-2019
2020.0 DEFENDER (LE), 415-01

INFORMATION AND ENTERTAINMENT SYSTEM

HIGH MOUNTED STOP LAMP FILTER (G2413599)

mcx30.com

REMOVAL


**NOTE:**

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Remove the headliner.

Refer to: [Headliner - 110](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

- 2.

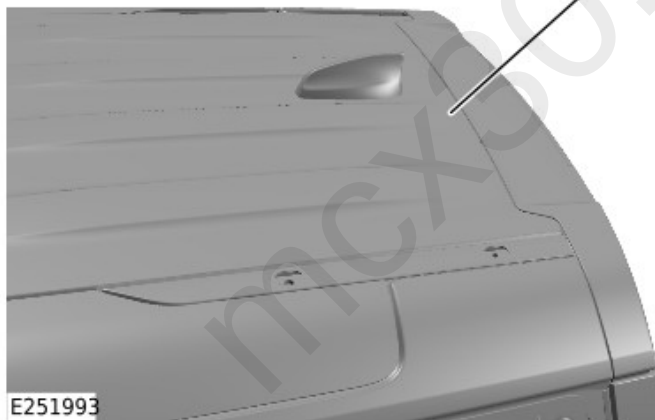

- Disconnect the 2 electrical connectors.
- Remove the bolt.
- Remove the High Mounted Stop Lamp (HMSL) filter.

INSTALLATION

1.

- Install the High Mounted Stop Lamp (HMSL) filter.
- Connect the 2 electrical connectors to the HMSL filter.
- Install and tighten the bolt.

Torque: 9Nm

2.

Install the headliner.

Refer to: [Headliner - 110](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

cmjjaGFyZG1vcnRvbjsyMDIwLTASLTE4VDEwOjEyOjA5LjMSNi7OTIuNDAuMTg5LjUzOw==

mcx30.com