

PUBLISHED: 01-AUG-2019  
2020.0 DEFENDER (LE), 415-01

INFORMATION AND ENTERTAINMENT SYSTEM

# INSTRUMENT PANEL SPEAKER (G2413601)



mcx30.com

## REMOVAL

 **NOTE:**

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- Make sure that all the clips are correctly installed.

1.

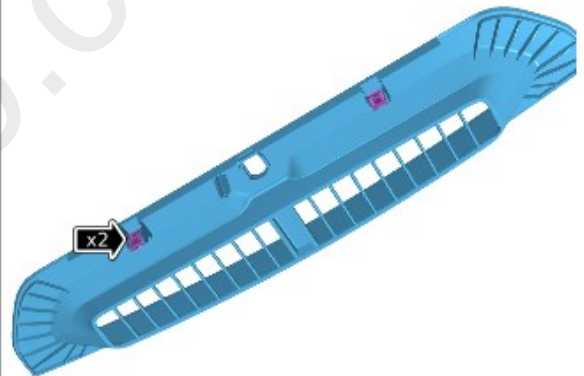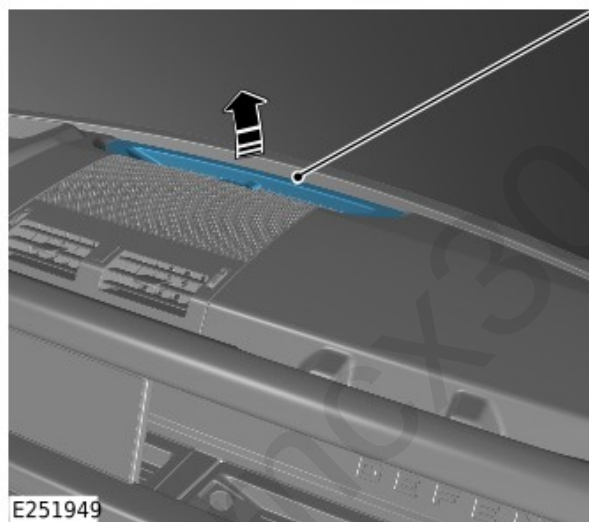


- Release the 2 clips.
- Remove the demist vent trim panel.

2.



- Release the 6 clips.
- Remove the instrument panel speaker cover trim.

3.

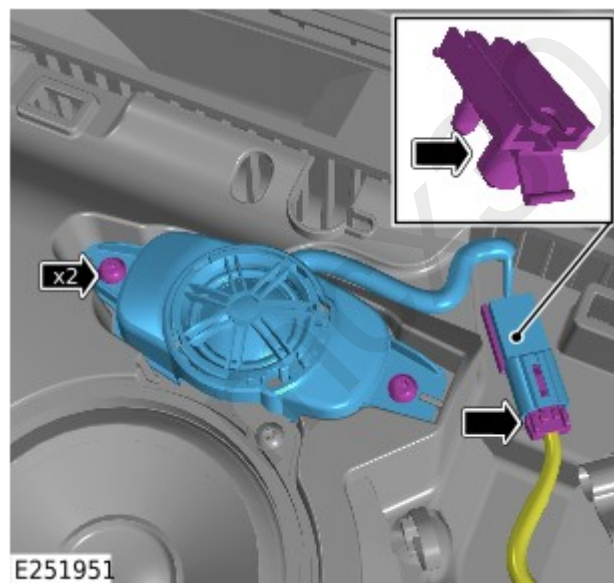

- Remove the 2 bolts.
- Carefully release the clip.
- Disconnect the electrical connector.
- Remove the instrument panel tweeter speaker assembly.

4.


 **NOTE:**

Do not disassemble further if the component is removed for access only.




Remove the instrument panel tweeter speaker.

5.

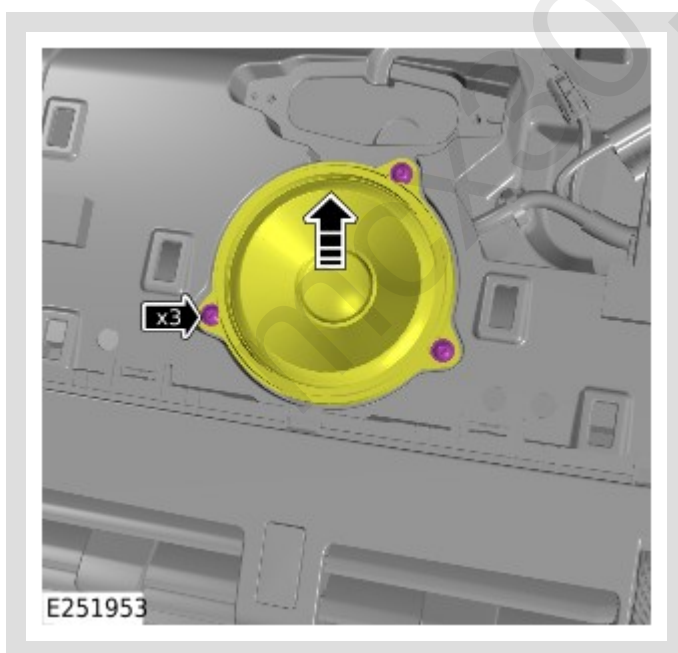

- Remove the 3 bolts.
- Reposition the instrument panel bass speaker to get access to the electrical connector.

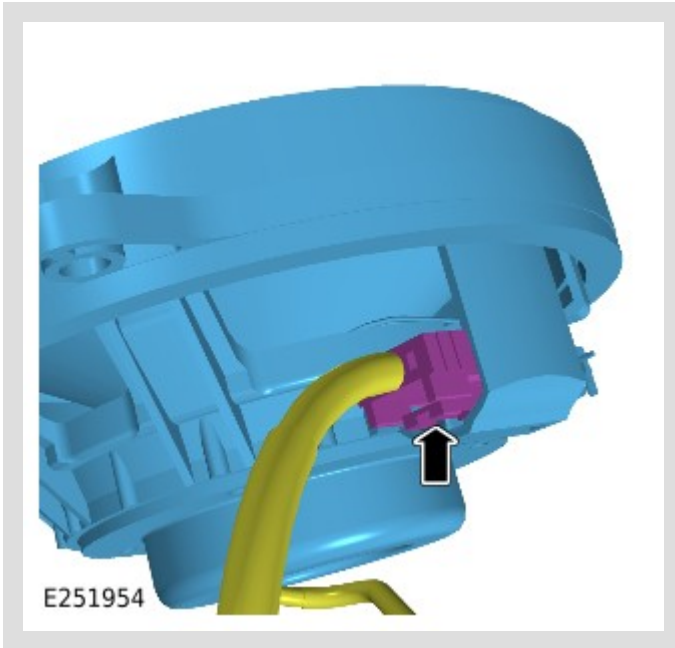

- Disconnect the electrical connector.
- Remove the instrument panel bass speaker.

## INSTALLATION

1.

- Connect the electrical connector to the instrument panel bass speaker.
- Install the instrument panel bass speaker.
- Install and tighten the 3 bolts.

*Torque: 4Nm*


2.

 **NOTE:**

Only carry out this step if previously removed.

Install the instrument panel tweeter speaker to the bracket.

3.

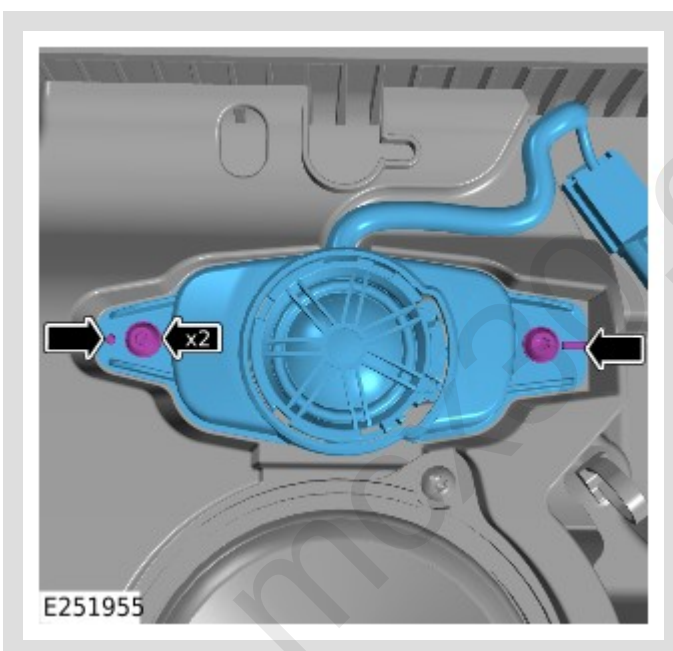

- Position the instrument panel tweeter speaker assembly into the correct location.
- Install and tighten the 2 bolts.

*Torque: 4Nm*

4.

- Connect the electrical connector to the instrument panel tweeter speaker.
- Install the wiring harness clip.

5.

- Install the instrument panel speaker cover trim.
- Install the 6 clips.

---

6.

- Install the demist vent trim panel.
- Install the 2 clips.

cmjjaGFyZG1vbnRvdjseyMDIwLTASLTE4VDEwOjEzOjI4LjUzOVe7OTluNDAuMTg5LjUzOw==

mcx30.com