

PUBLISHED: 13-MAR-2020
2020.0 DEFENDER (LE), 417-01

EXTERIOR LIGHTING

CENTRAL HIGH MOUNTED STOP LAMP (G2422836)

mcx30.com

REMOVAL


⚠ CAUTION:

Make sure to protect the paintwork.

△ NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1.

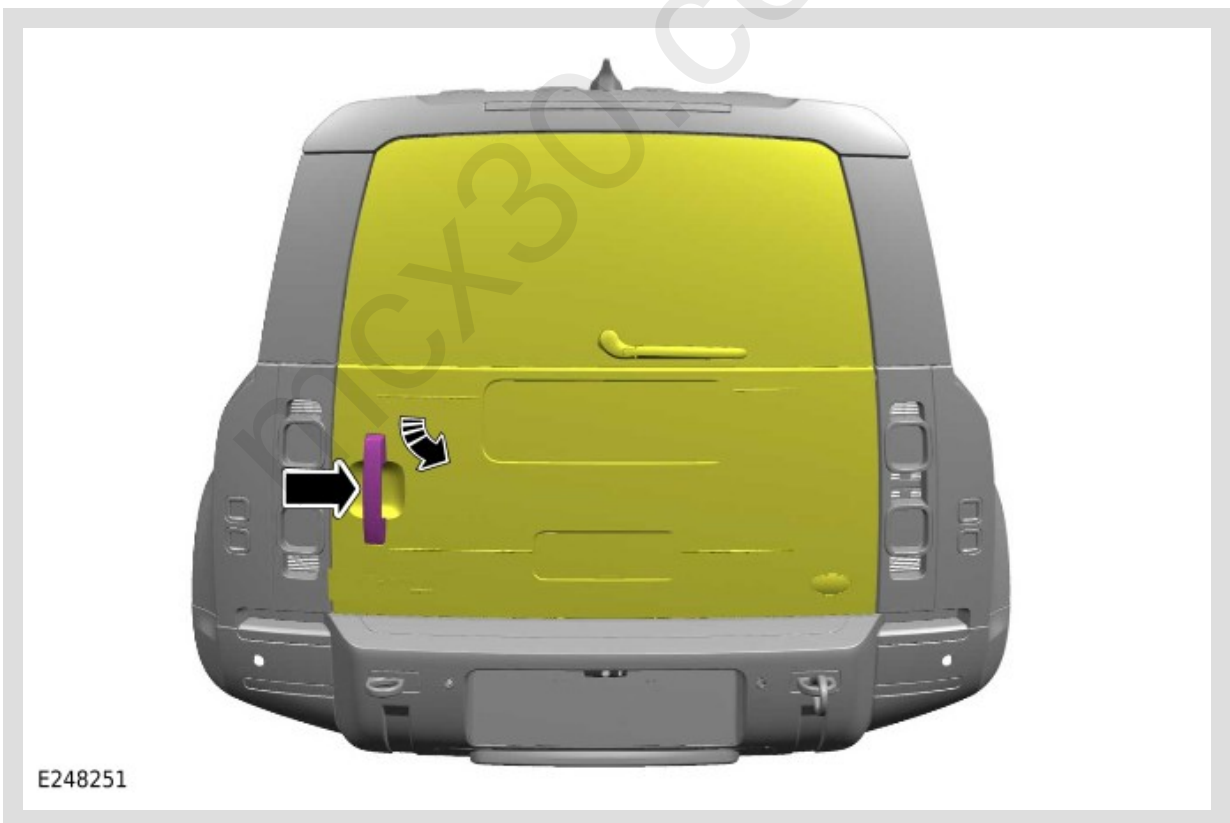

Open the tailgate.

2.


 NOTE:

Repeat the step for the other side.


Remove the rear quarter panel moulding.

Refer to: [Rear Quarter Panel Moulding](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).

3.

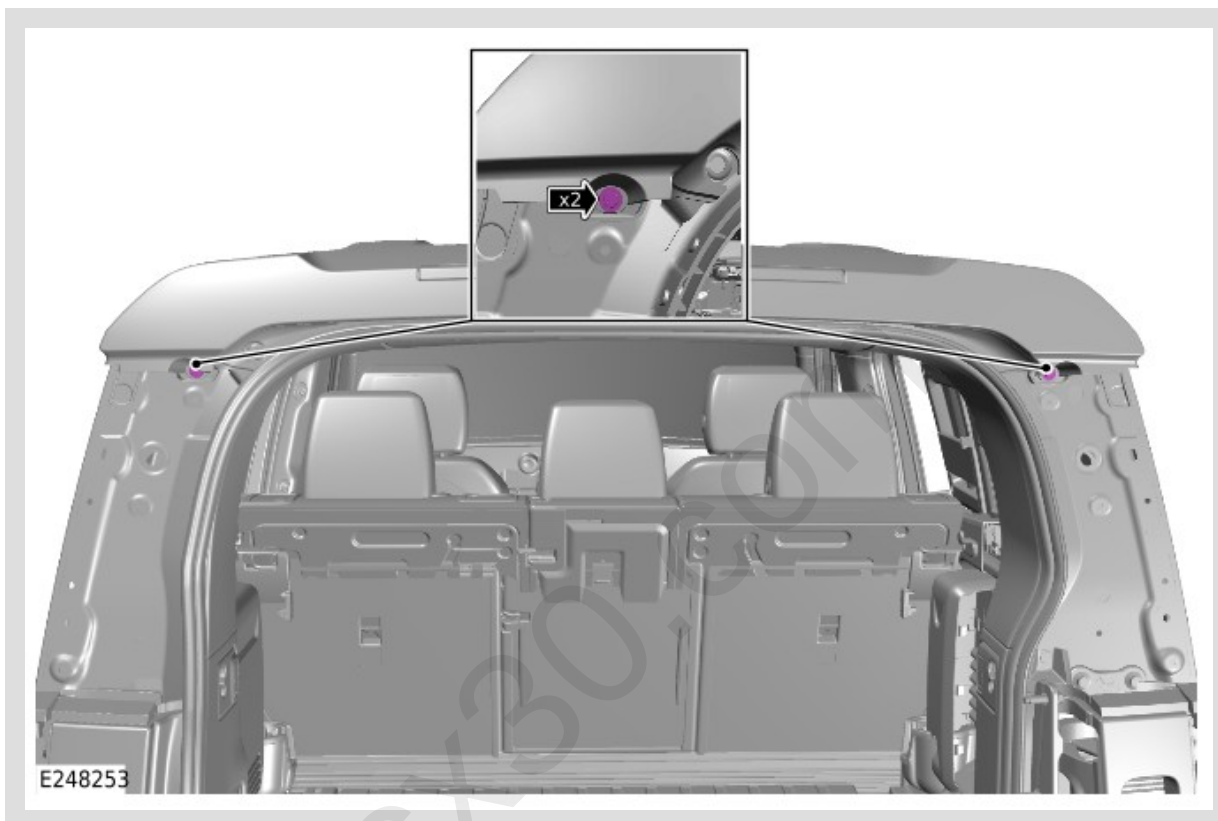

Remove the 2 bolts.

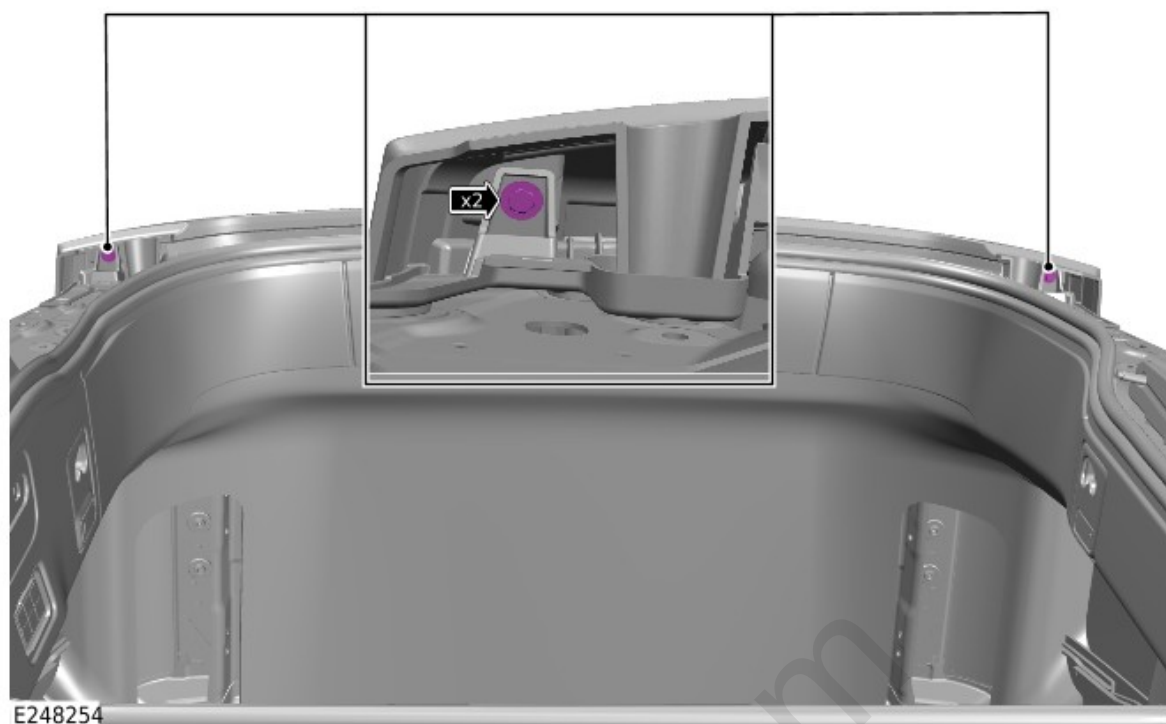

Remove the 2 bolts.

5.

 NOTE:

Do not remove the component at this stage.




Release the 11 clips.

6.


NOTE:

With assistance remove the components.

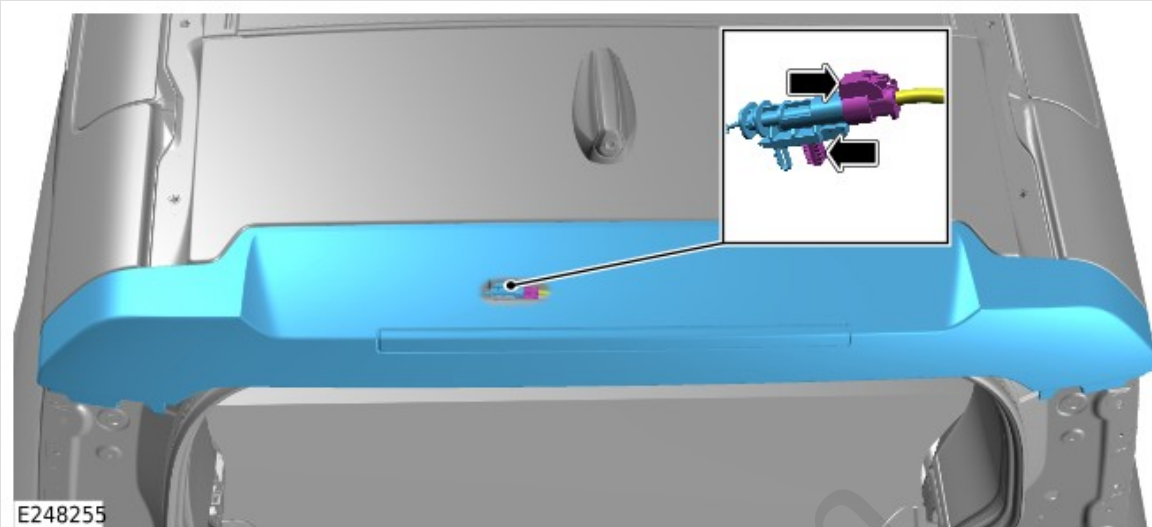


- Reposition the rear spoiler finisher to get access to the electrical connector.
- Release wiring harness clip.
- Disconnect the electrical connector.
- Remove the rear spoiler finisher.

7.

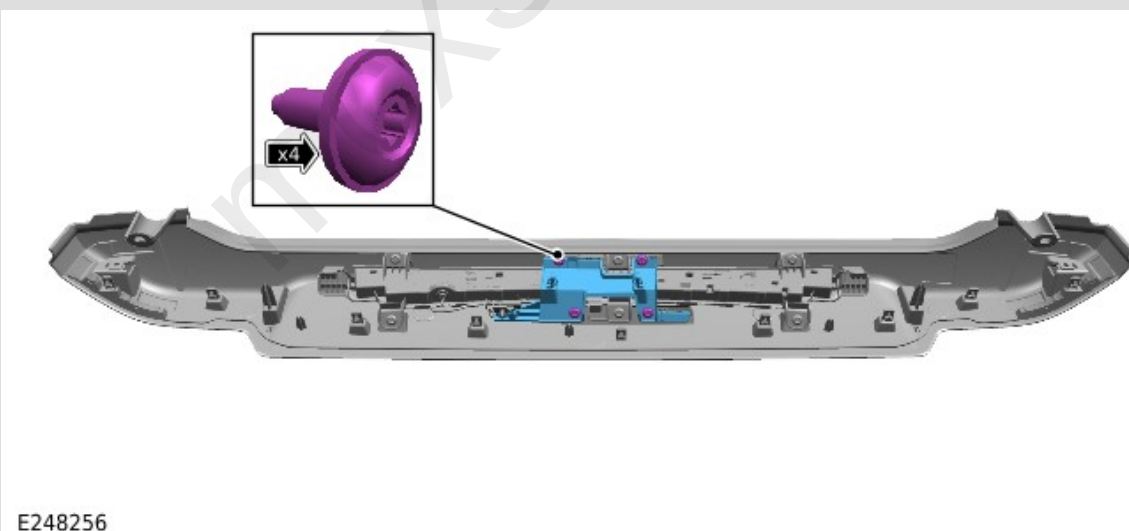

- Remove the 4 screws.
- Remove the Central High Mounted Stop Lamp (CHMSL) bracket.

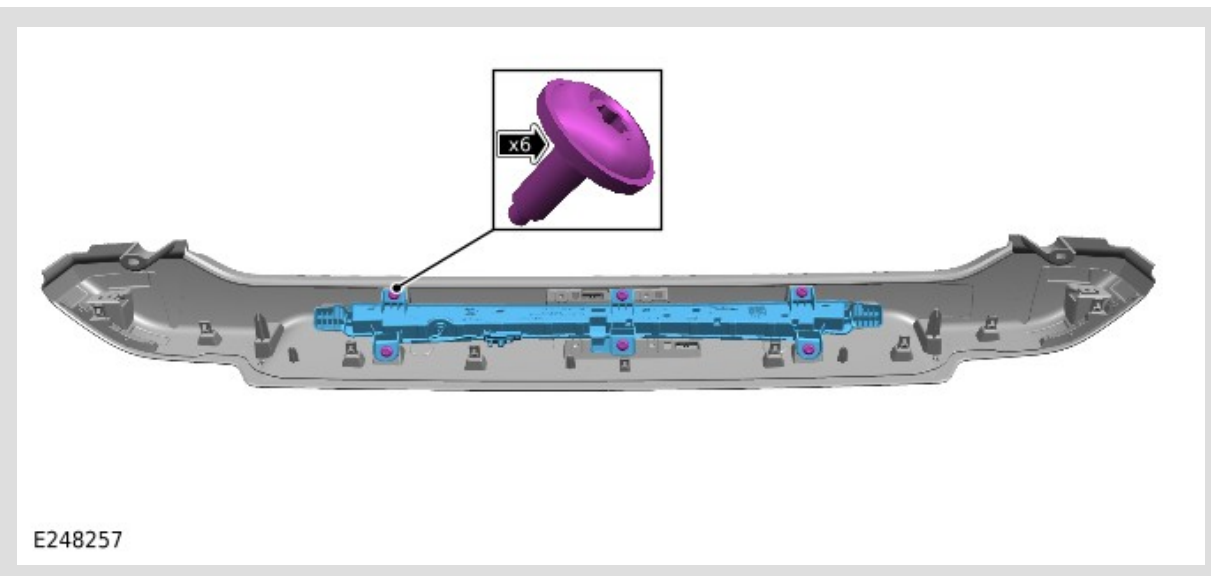

- Remove the 6 screws.
- Remove the CHMSL.

mcx30.com

INSTALLATION

1.

- Install the CHMSL to the rear spoiler finisher.
- Install and tighten the 6 CHMSL screws.

Torque: 2Nm

2.

- Install the CHMSL bracket.
- Install and tighten the 4 CHMSL bracket screws.

Torque: 2Nm

3.

NOTE:

With assistance, install the component.

- Connect the electrical connector to the CHMSL.
- Install the electrical connector clip to the rear spoiler bracket.
- Install the rear spoiler finisher.
- Install the 11 rear spoiler finisher clips.

4.

- Install and tighten the 4 rear spoiler finisher bolts.

Torque: 7Nm

5.

NOTE:

Repeat the step for the other side.

Install the rear quarter panel moulding.

Refer to: [Rear Quarter Panel Moulding](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).

6.

Close the tailgate.