

PUBLISHED: 17-OCT-2019
2020.0 DEFENDER (LE), 419-01A

ANTI-THEFT - ACTIVE

HOOD SWITCH (G2323870)


mcx30.com

REMOVAL

 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.


1.

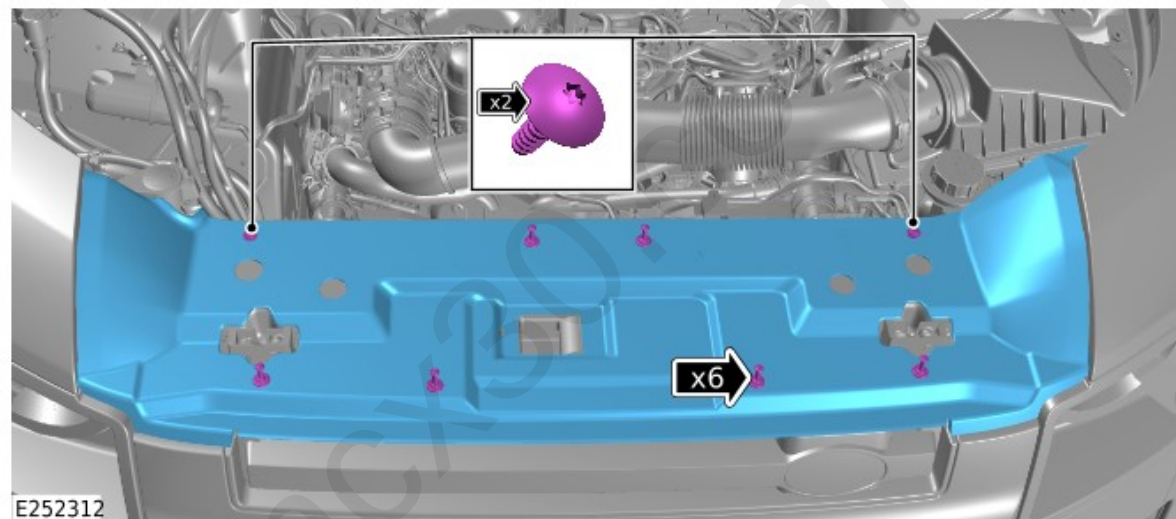

- Release the 2 screws.
- Release the 6 clips.
- Remove the upper radiator grille panel.

 NOTE:

Mark the installed position of the latch before loosening the bolts.

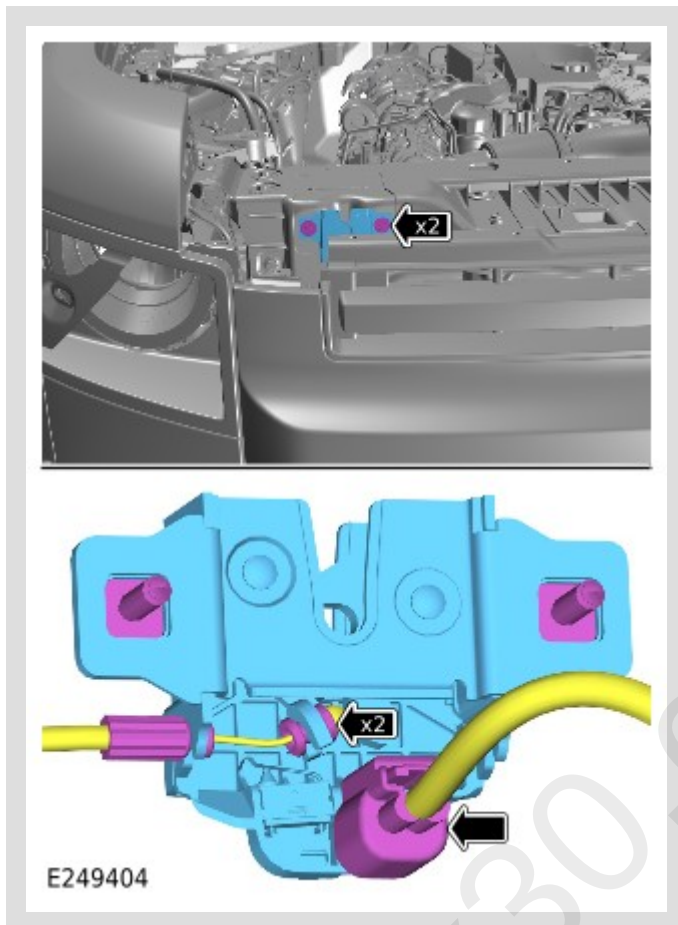

- Remove the 2 bolts.
- Disconnect the hood switch electrical connector.
- Release the 2 clips.
- Remove the right hood latch.

INSTALLATION

1.



NOTE:

Align the marks made during the removal procedure.

Install the right hood latch.

- Install the 2 hood release cable clips.
- Install and tighten the 2 hood latch bolts.

Torque: 10Nm

2.

- Install the upper radiator grille panel.
- Install the 6 clips.
- Install and tighten the 2 screws.

Torque: 5Nm

cmjjaGFyZG1vcnRvbjsyMDIwLTA5LTE4VDE4E5OjE5Lj11MFo7OTluNDAuMTg5LjUzOw==

mcx30.com