

PUBLISHED: 20-MAY-2019
2020.0 DEFENDER (LE), 501-02

FRONT END BODY PANELS

ENGINE UNDERSHIELD (G2391455)

mcx30.com

REMOVAL


 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Raise and support the vehicle on a suitable 2 post lift.
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).


ⓘ CAUTION:

Take extra care not to damage the component.

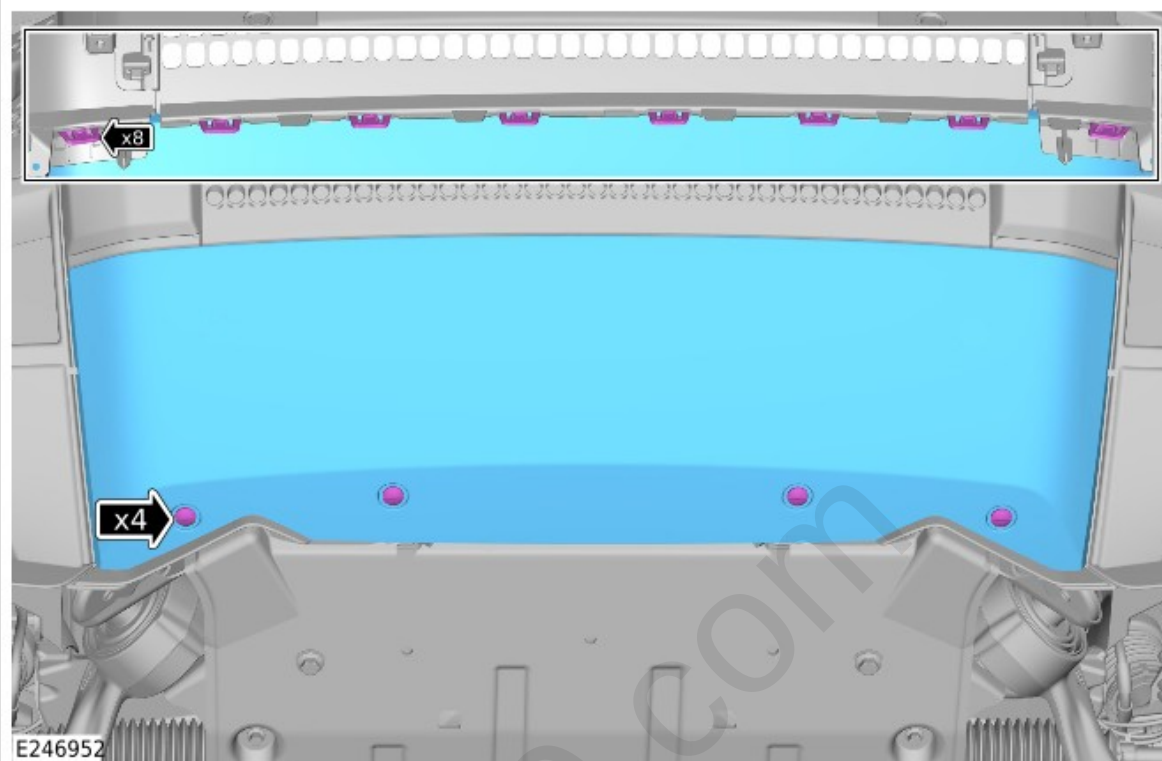


- Remove the 4 fasteners.
- Release the 8 clips.
- Remove the tow eye cover.

3.

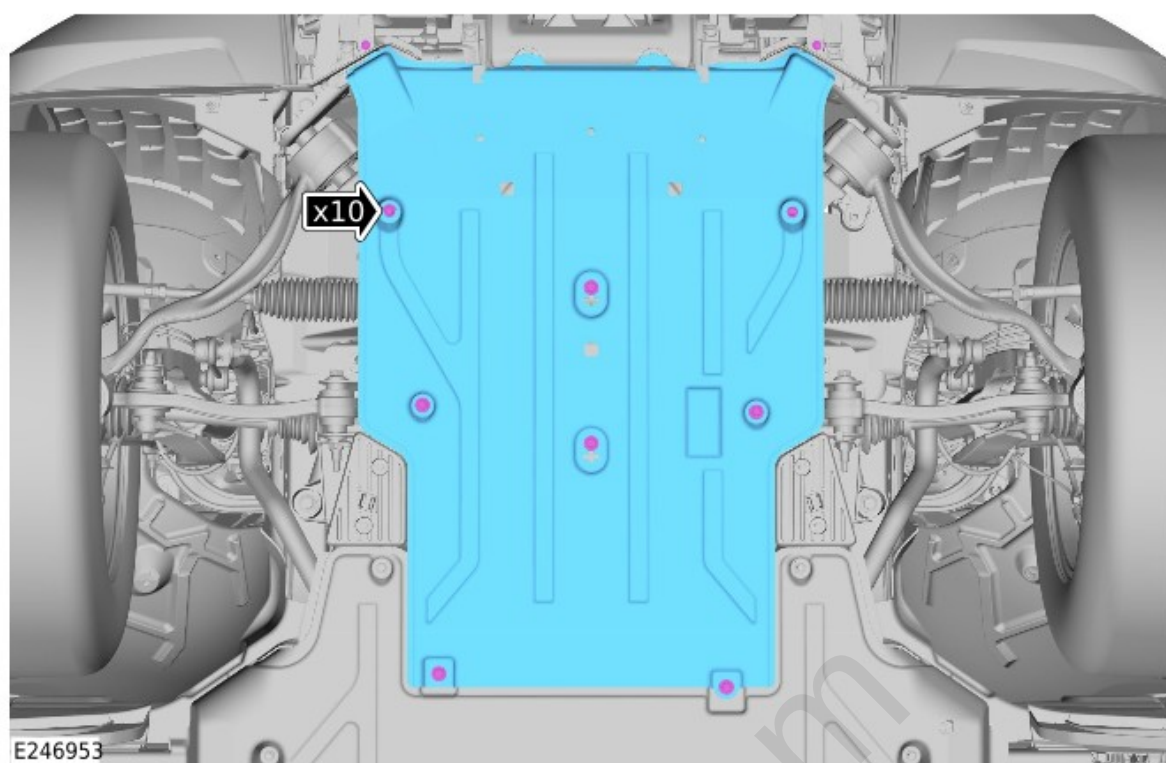


- Remove the 10 bolts.
- Remove the engine undershield cover.

4.

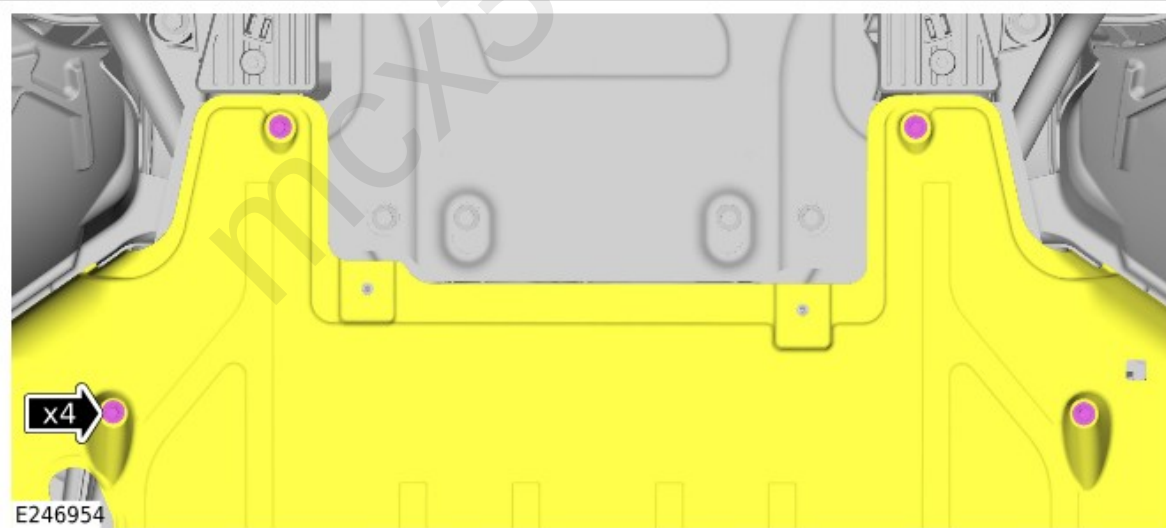

Remove the 4 bolts.

5.

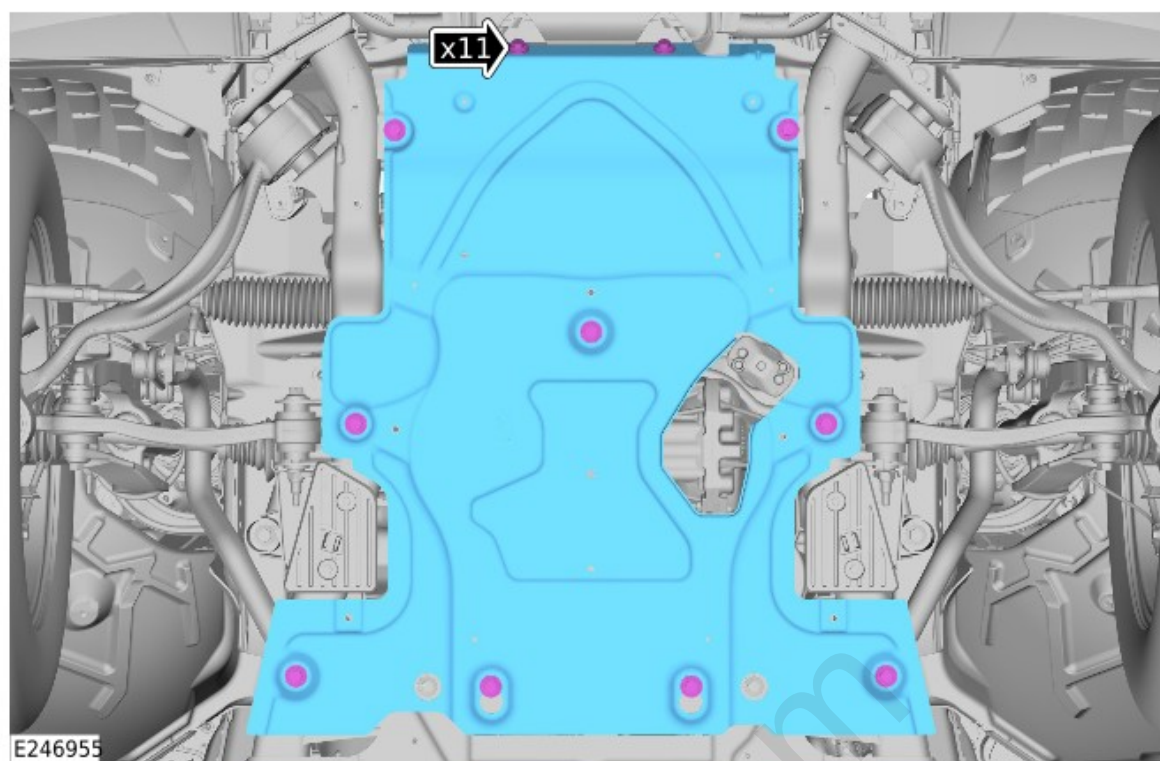

- Remove the 11 bolts.
- Remove the engine undershield.

INSTALLATION

1.

- Install the engine undershield.
- Install and tighten the 11 bolts.
Torque: 60Nm

2.

- Install and tighten the 4 bolts.
Torque: 5.4Nm

3.

- Install the engine undershield cover.
- Install and tighten the 10 bolts.
Torque: 5.4Nm

4.

- Install the tow eye cover.
- Install the 8 clips.
- Install the 4 fasteners.

mcx30.com