

PUBLISHED: 19-NOV-2019
2020.0 DEFENDER (LE), 501-02

FRONT END BODY PANELS

FRONT WHEEL ARCH LINER (G2409140)

mcx30.com

REMOVAL


 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure Contains illustrations for the left side components, right side components are similar.

1. Raise and support the vehicle on a suitable 2 post lift.
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).


2. Remove the wheel and tire.
Refer to: [Wheel and Tire](#) (204-04 Wheels and Tires, Removal and Installation).

- 3.

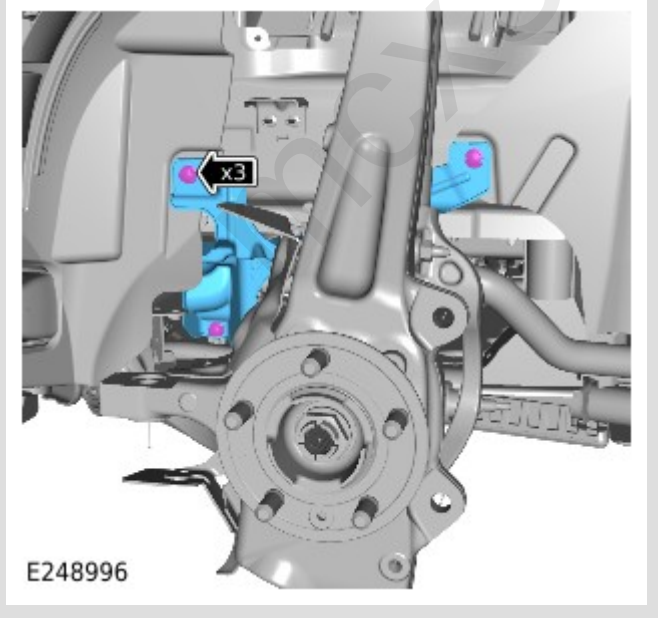


- Release the 3 clips.
- Remove the front wheel arch inner moulding.

4.

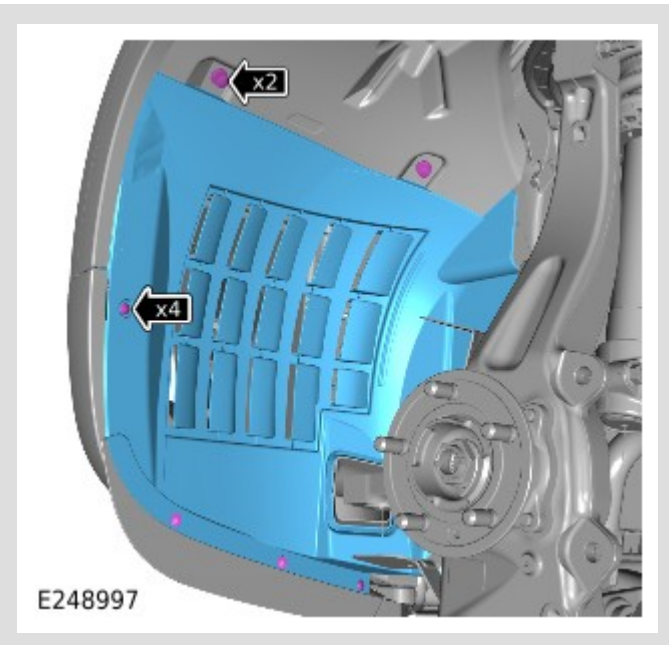

- Release the 2 clips.
- Remove the 4 screws.
- Remove the wheel arch liner front section.

5.

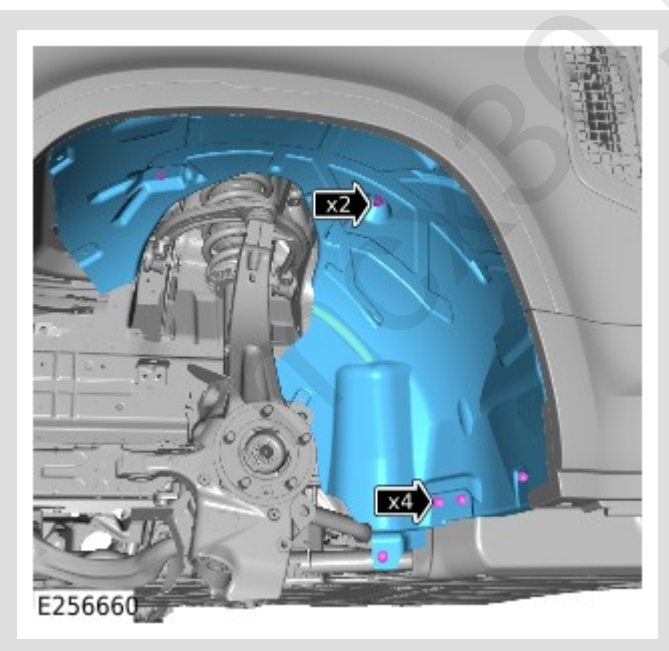

- Release the 2 clips.
- Remove the 4 screws.
- Remove the wheel arch liner rear section.

INSTALLATION

1.

- Install the wheel arch liner rear section.
- Install the 4 screws.
Torque: 5Nm
- Install the 2 clips.

2.

- Install the wheel arch liner front section.
- Install the 4 screws.
Torque: 5Nm
- Install the 2 clips.

3.

- Install the front wheel arch inner moulding.
- Install the 3 clips.

4.

Install the wheel and tire.

Refer to: [Wheel and Tire](#) (204-04 Wheels and Tires, Removal and Installation).