

PUBLISHED: 14-APR-2020
2020.0 DEFENDER (LE), 501-02

FRONT END BODY PANELS

SECONDARY BULKHEAD CENTER PANEL (G2632800)

mcx30.com

GENERAL EQUIPMENT

EQUIPMENT NAME
Telescopic Support

REMOVAL

 NOTE:


- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Remove the cowl panel.

Refer to: [Cowl Panel](#) (501-02 Front End Body Panels, Removal and Installation).

 NOTE:


Repeat this step for the other side.

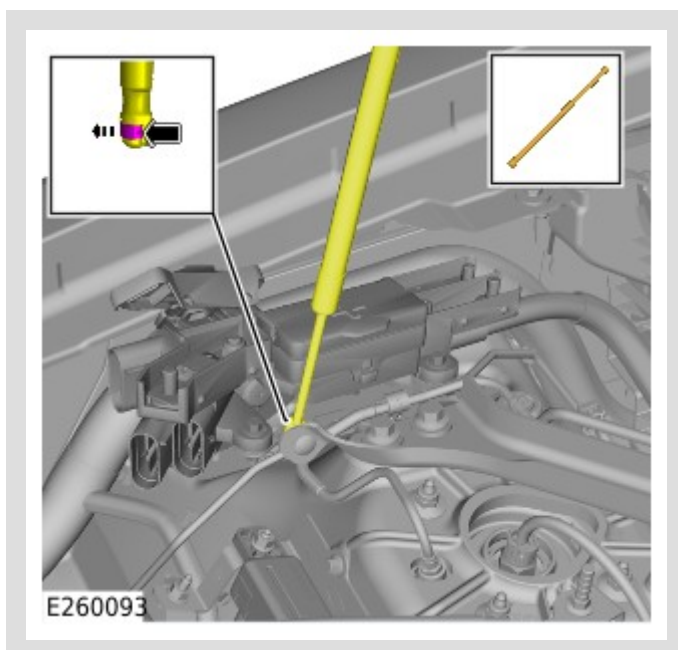

- With the aid of another technician, release the 2 struts.
- Use the telescopic support to support the hood.

General Equipment: [Telescopic Support](#)

3.

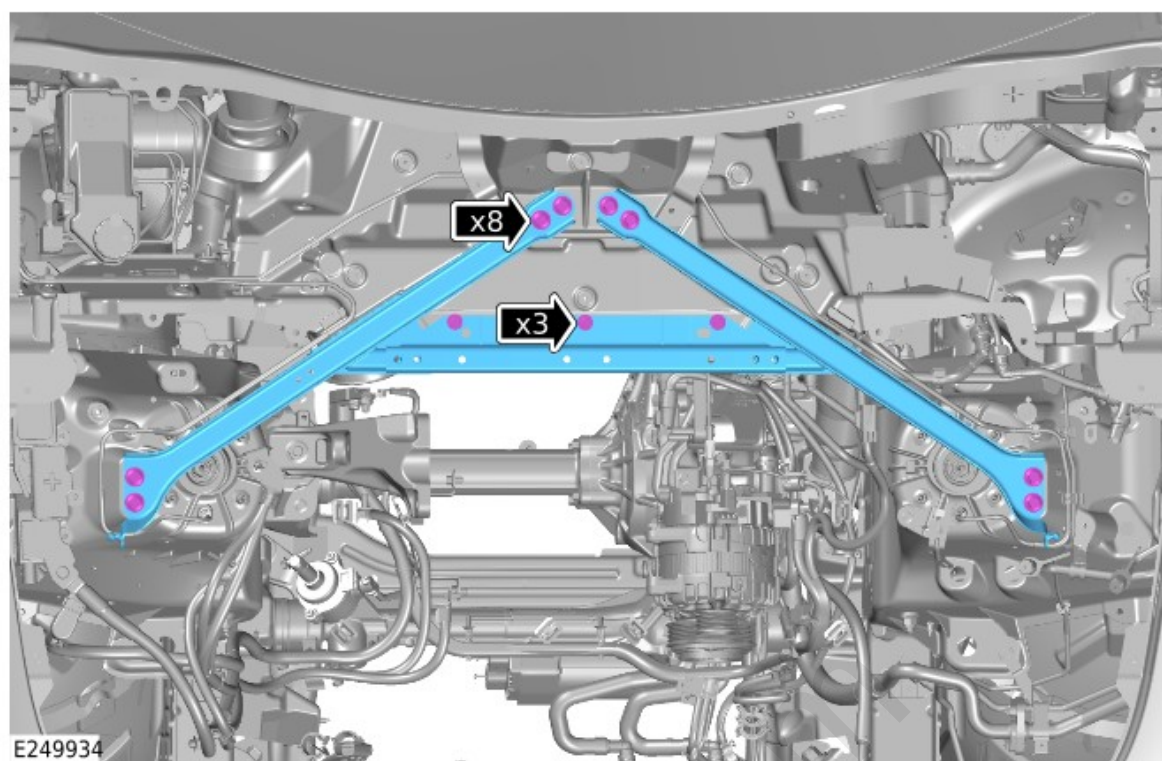


- Remove the 11 bolts.
- Remove the engine compartment brace.

4.


NOTE:

If equipped.

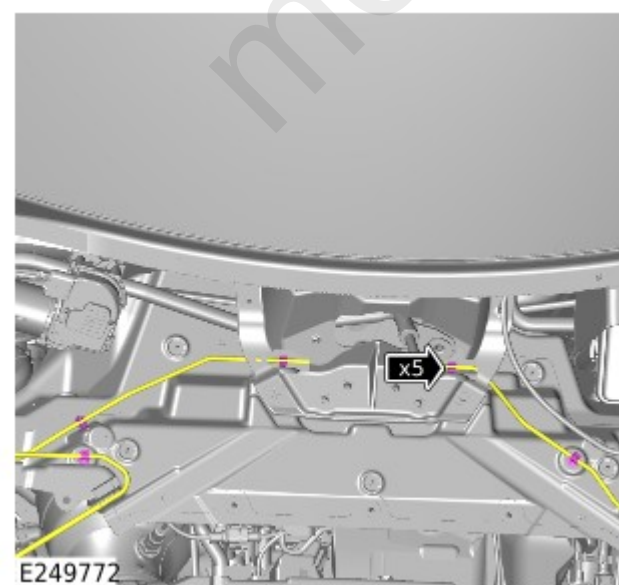

- Release the 5 clips from the air suspension pipes.
- Reposition the air suspension pipes away from the secondary bulkhead center panel.

5.

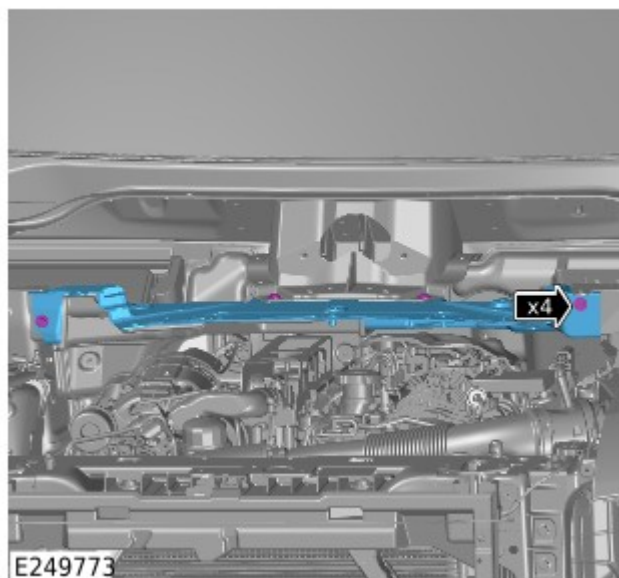

- Remove the 4 bolts.
- Remove the secondary bulkhead center panel.

INSTALLATION

1.

- Install the secondary bulkhead center panel.
- Install and tighten the 4 bolts.

Torque: 5.4Nm

2.

NOTE:

If equipped.

- Reposition the air suspension pipes into the correct location.
- Install the 5 clips to the air suspension pipes.

3.

- Install the engine compartment brace.
 - Install the 8 M10 bolts.
- Torque: 55Nm*
- Install the 3 M6 bolts.

Torque: 5.4Nm

4.

NOTE:

Repeat this step for the other side.

- With the aid of another technician, install the 2 struts.
- Remove the telescopic support.

5.

Install the cowl panel.

Refer to: [Cowl Panel](#) (501-02 Front End Body Panels, Removal and Installation).