

PUBLISHED: 07-AUG-2019
2020.0 DEFENDER (LE), 501-03

BODY CLOSURES

FRONT DOOR WEATHERSTRIP (G2414321)

mcx30.com

REMOVAL

 NOTES:


- This procedure contains illustrations for left side components, right side components are similar.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.

1.



- Remove the bolt.
- Disconnect the front door check arm.

2.

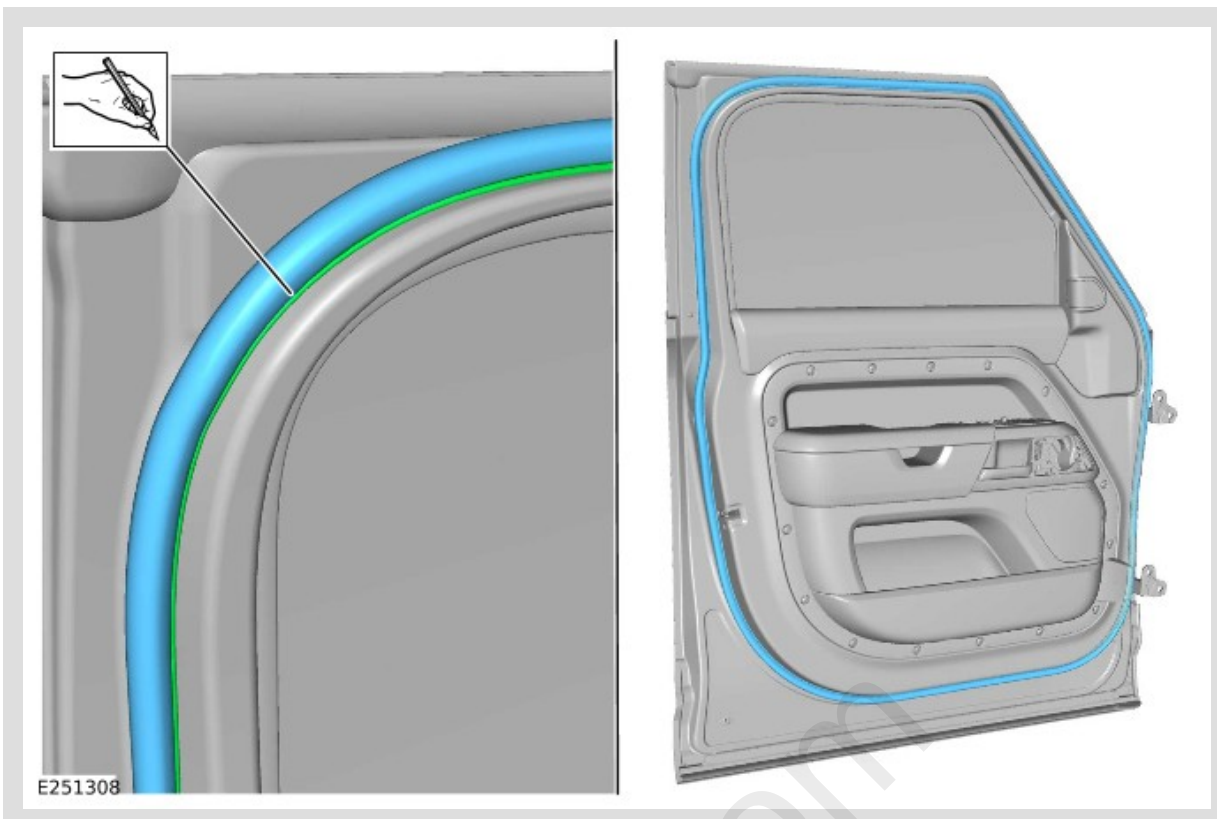

Use a suitable non-permanent marker, mark the installed position of existing seal.

3.




Remove the front door weatherstrip.

INSTALLATION

1. Clean the adhesive contact area.

2.

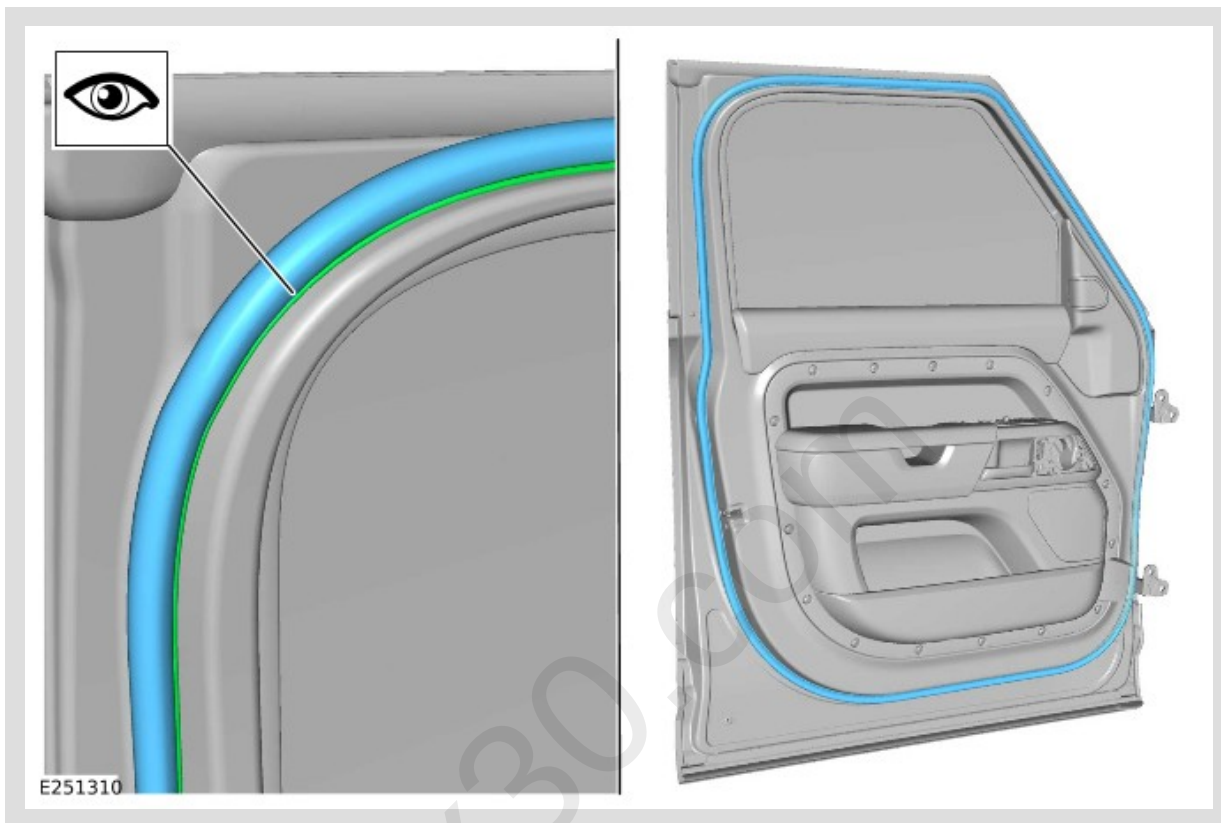

Install the front door weatherstrip to the marked outline.



- Connect the front door check arm.
- Install and tighten the bolt.

Torque: 24Nm