

PUBLISHED: 20-JAN-2020
2020.0 DEFENDER (LE), 501-05

INTERIOR TRIM AND ORNAMENTATION

B-PILLAR UPPER TRIM PANEL - 90 (G2412664)


mcx30.com

REMOVAL

 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1.

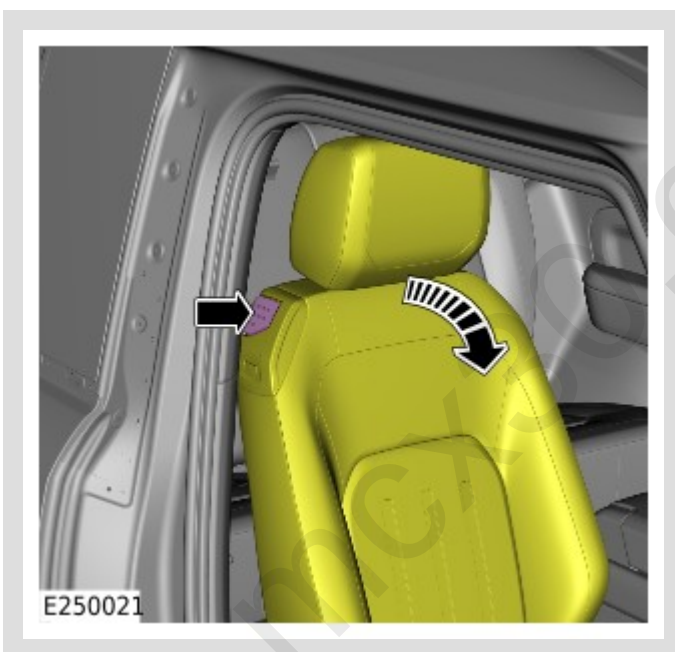


Move the front row seat forward and into the folded position.

2.



- Release the 2 clips.
- Reposition the rear floor carpet mat to get access the rear floor carpet.

3.

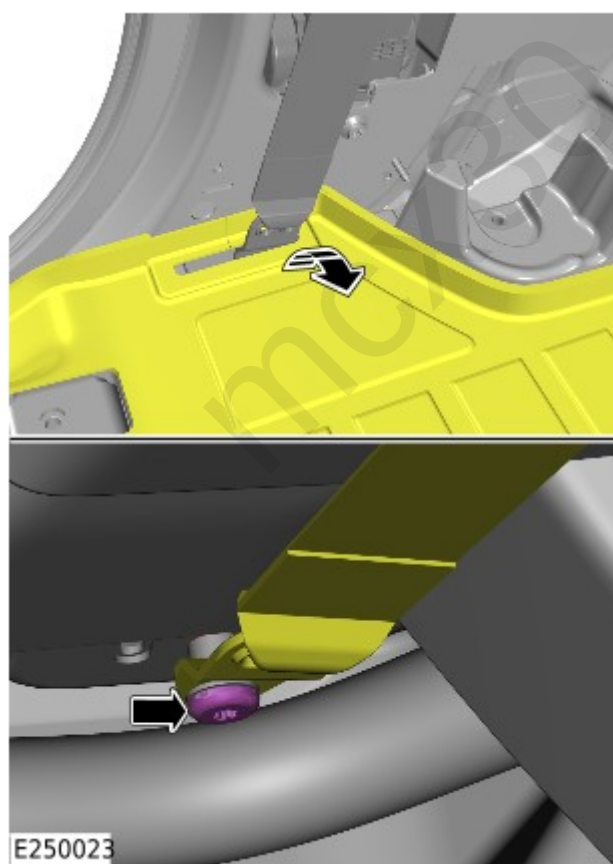

- Reposition the rear floor carpet to get access the front row seatbelt anchor.
- Remove the bolt.

4.



Release the front door weatherstrip.

5.



Remove the 2 passenger assist handle covers.

6.




- Remove the 2 bolts.
- Remove the passenger assist handle.

7.



- Remove the airbag cover.
- Use a suitable tool to release the clip.

8.


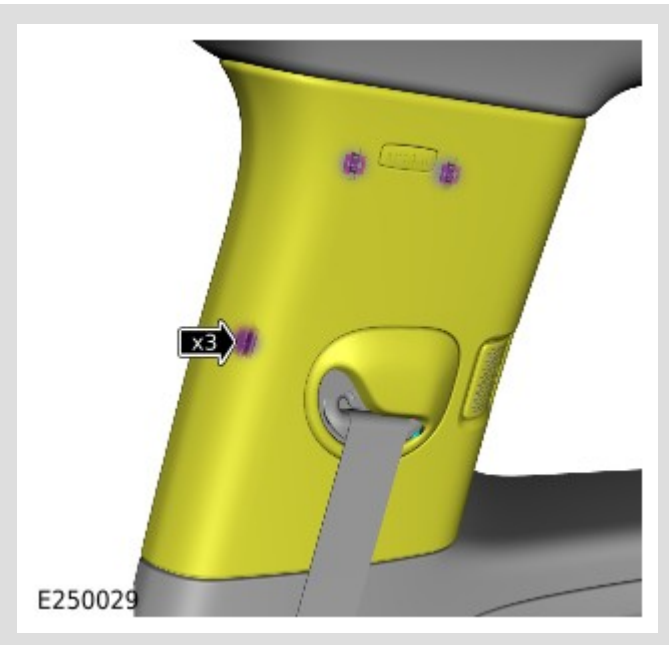


Release the B-pillar trim panel.

9.




Reposition the rear quarter trim panel to get access to the B-pillar trim panel.

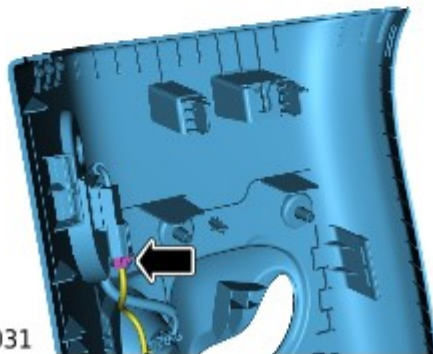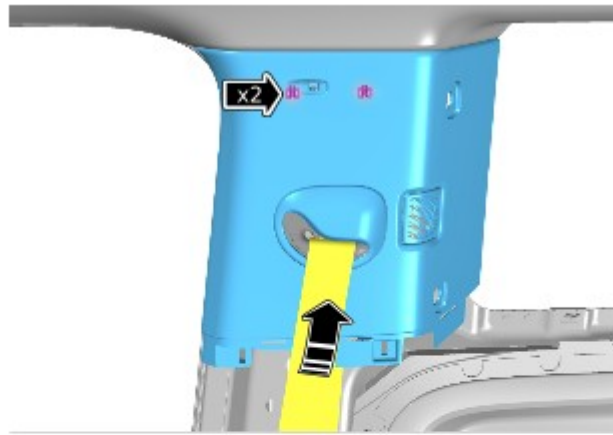

- Disconnect the electrical connector.
- Remove the B-pillar trim panel.

 NOTE:

Do not complete this step if the component is removed for access only.

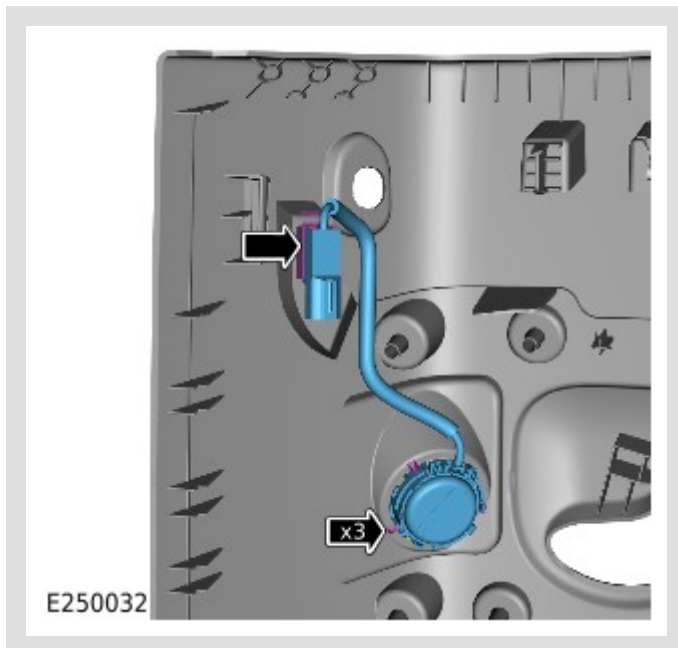

- Release the electrical connector from the clip.
- Release the tweeter speaker from the 3 clips.
- Remove the tweeter speaker.

INSTALLATION

1.



NOTE:

Only complete this step if previously removed.

- Install the tweeter speaker.
- Install the electrical connector into the clip.

2.

- Connect the tweeter speaker electrical connector.
- Install the B-pillar trim panel.
- Install the 4 B-pillar trim panel clips.

3.

Install the airbag cover.

4.

- Install the 3 rear quarter trim panel clips.
- Install the rear quarter trim panel.

5.

- Install the passenger assist handle.
- Install and tighten the 2 bolts.
Torque: 7Nm
- Install the 2 passenger assist handle covers.

6.

Position the door weatherstrip in the correct location.

7.

- Install and tighten the front row seatbelt anchor bolt.
Torque: 40Nm
- Reposition the rear floor carpet to the original position.

8.

- Position the rear floor carpet mat to the original position.
- Install the 2 clips.

9.

Move the front row seat to the original position.

mcx30.com