

PUBLISHED: 12-MAY-2020
2020.0 DEFENDER (LE), 501-05

INTERIOR TRIM AND ORNAMENTATION

C-PILLAR TRIM PANEL - 90 (G2412666)

mcx30.com

REMOVAL


 NOTE:

- This procedure contains illustrations for left side components, right side components are similar.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1.

 NOTE:

The step must be completed on both sides.

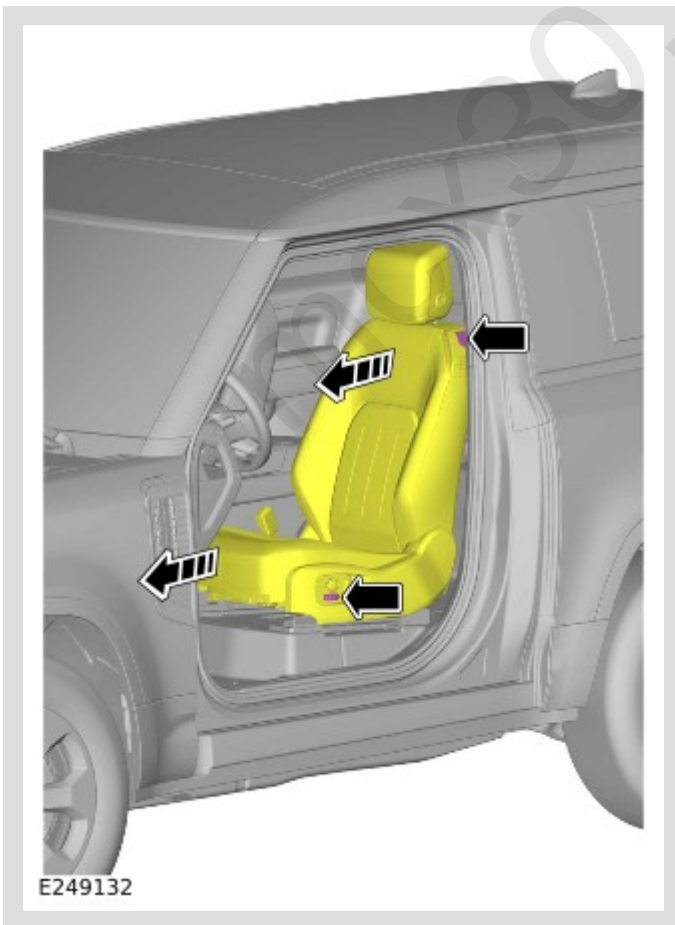


Position the front row seat forward.

2. Disconnect the startup battery ground cable.


Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

3.

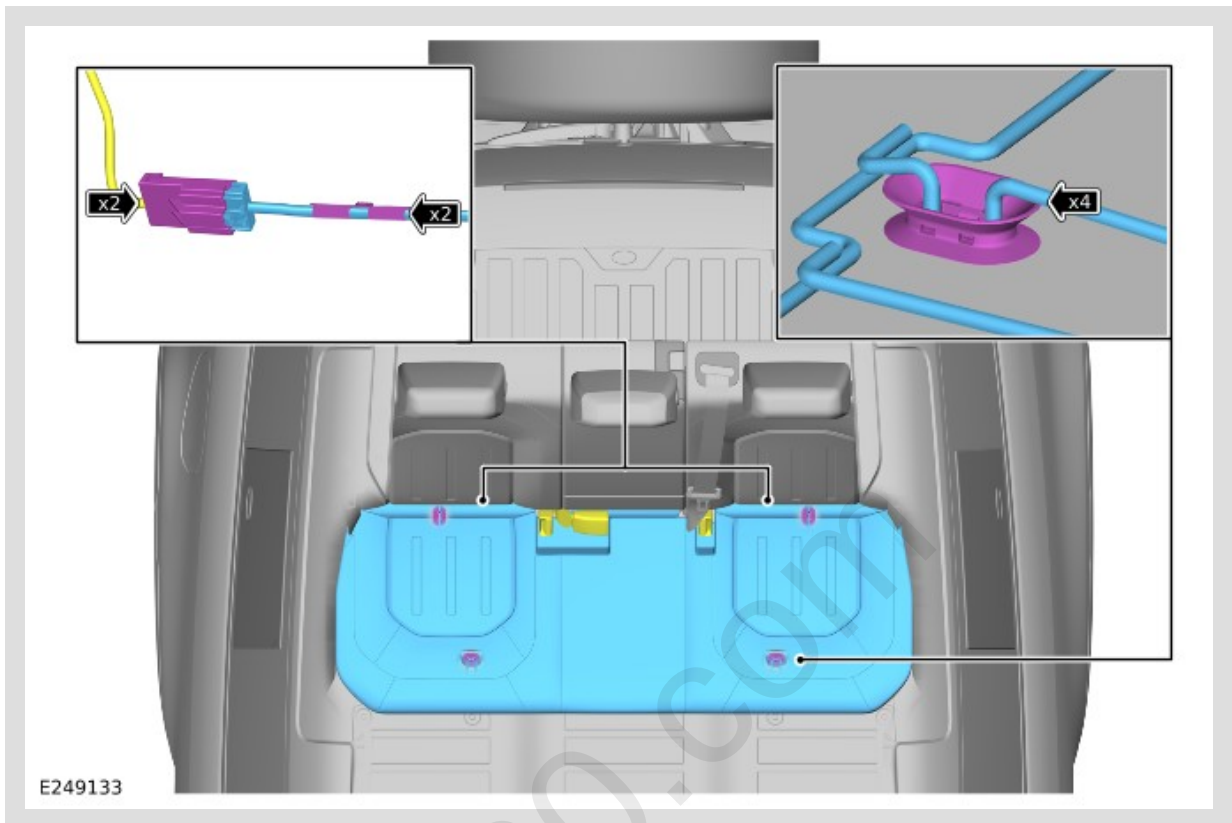


- Release the 4 fasteners.
- Release the second row seat cushion.
- Disconnect the 2 electrical connectors.
- Release the 2 wiring harness clips.
- Remove the second row seat cushion.

4.

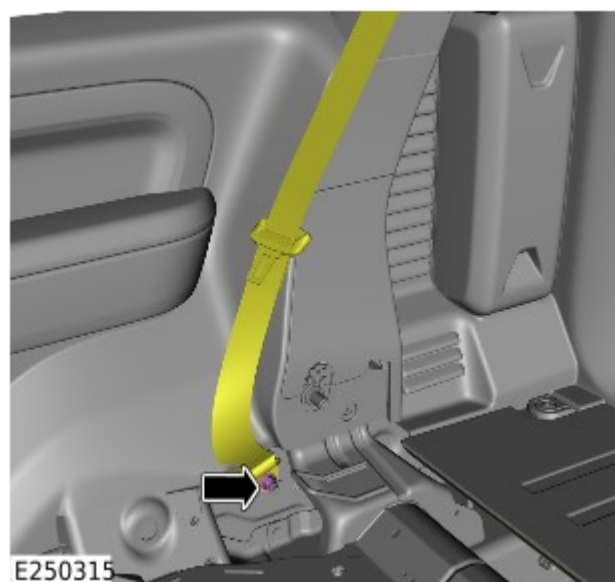

- Remove the nut.
- Reposition the second row seatbelt.

5.

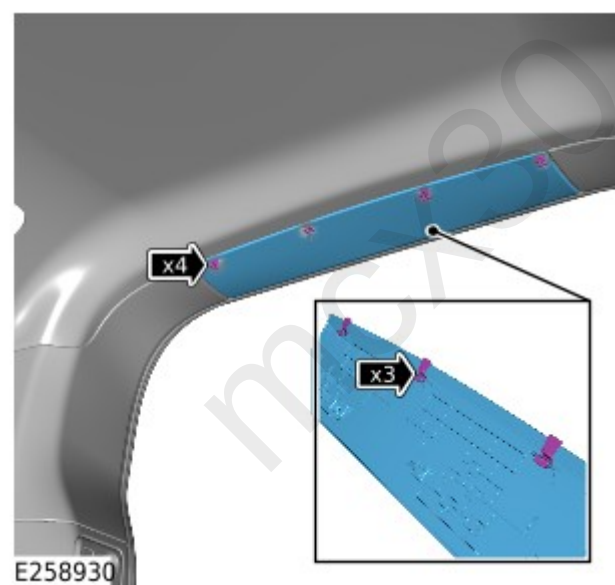


- Release the 7 clips.
- Remove the loadspace upper trim panel.

6.

Remove the loadspace side trim panel.

Refer to: [Right Loadspace Trim Panel - 90](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

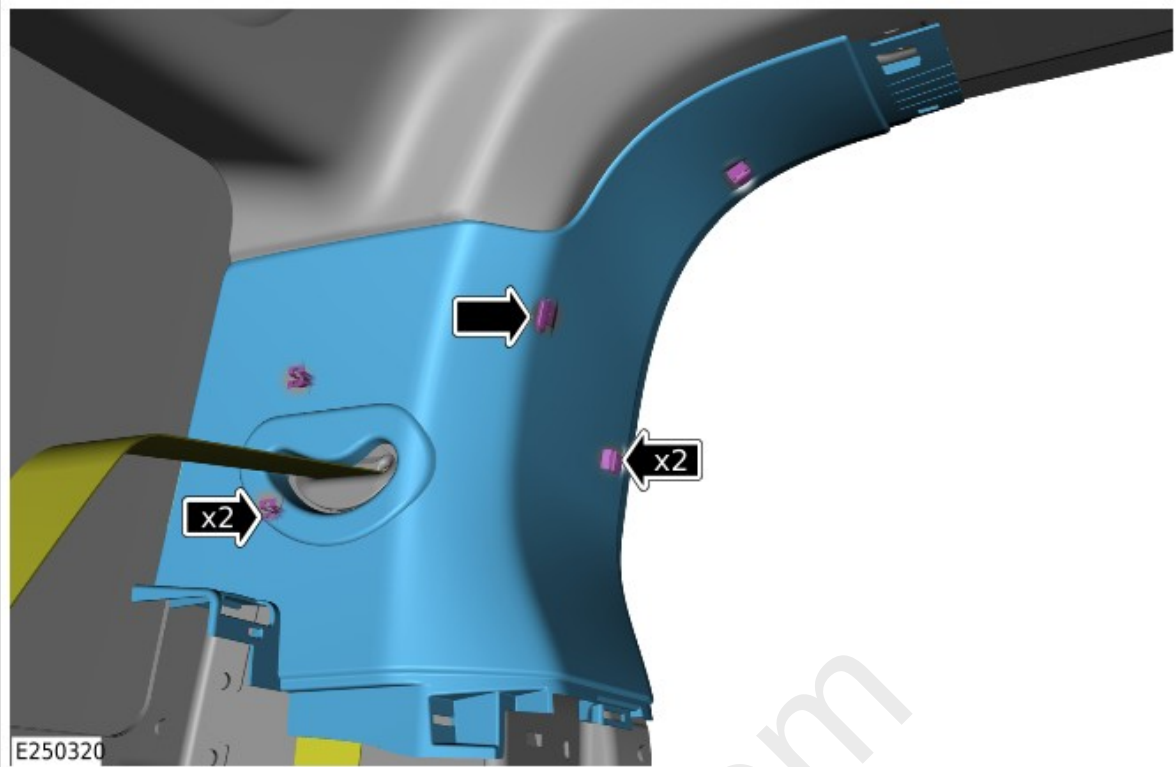

- Release the 5 clips.
- Remove the C-pillar trim panel.

INSTALLATION

1.



NOTE:

Make sure that the trim is correctly installed to the clips.

- Install the C-Pillar trim panel.
- Install the 5 clips.

2.


Install the loadspace side trim panel.

Refer to: [Right Loadspace Trim Panel - 90](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

3.

- Install the loadspace upper trim panel.
- Install the 7 clips.

4.

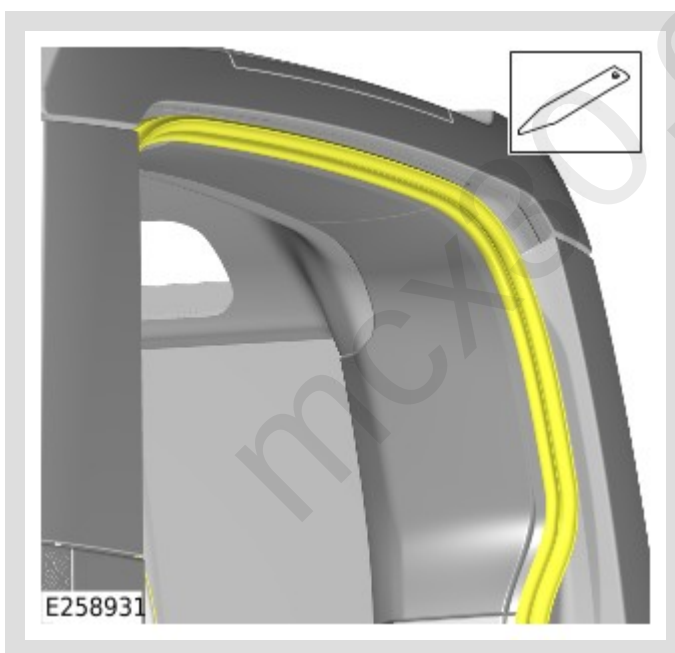

Reposition the tailgate aperture seal into the correct location.

5.

Install and tighten the second row seatbelt anchor nut.

Torque: 40Nm

6.

- Connect the 2 seat cushion heating element electrical connectors.
- Install the 2 wiring harness clips.
- Install the second row seat cushion.

-
7. Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

8.

 NOTE:

The step must be completed on both sides.

Reposition the front row seat to original position.

cmjjaGFyZG1vbnRvbjsyMDIwLTASLTU4VDE4OjU5OjUxLjQ0OFo7OTluNDAuMTg5LjUwOw==

mcx30.com