

PUBLISHED: 09-SEP-2020
2020.0 DEFENDER (LE), 501-08

EXTERIOR TRIM AND ORNAMENTATION

FRONT FENDER MOULDING (G2404761)

mcx30.com

REMOVAL

⚠ CAUTION:

Make sure to protect the paintwork.


△ NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains illustrations for left side components, right side components are similar.

1.



Reposition the front wheel to get access to the front fender moulding.

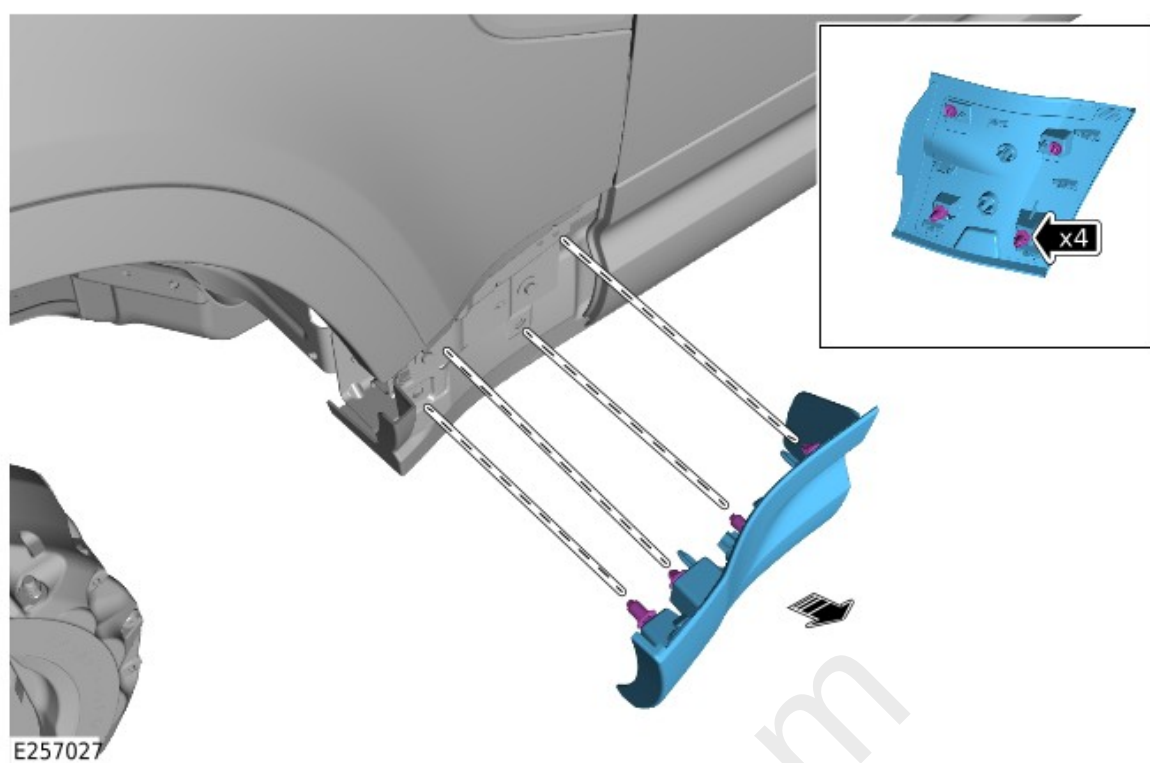

- Release the 4 clips.
- Remove the front fender moulding.

INSTALLATION


1.

⚠ CAUTION:

Make sure to protect the paintwork.

△ NOTE:

Make sure that the retaining clips are correctly installed.

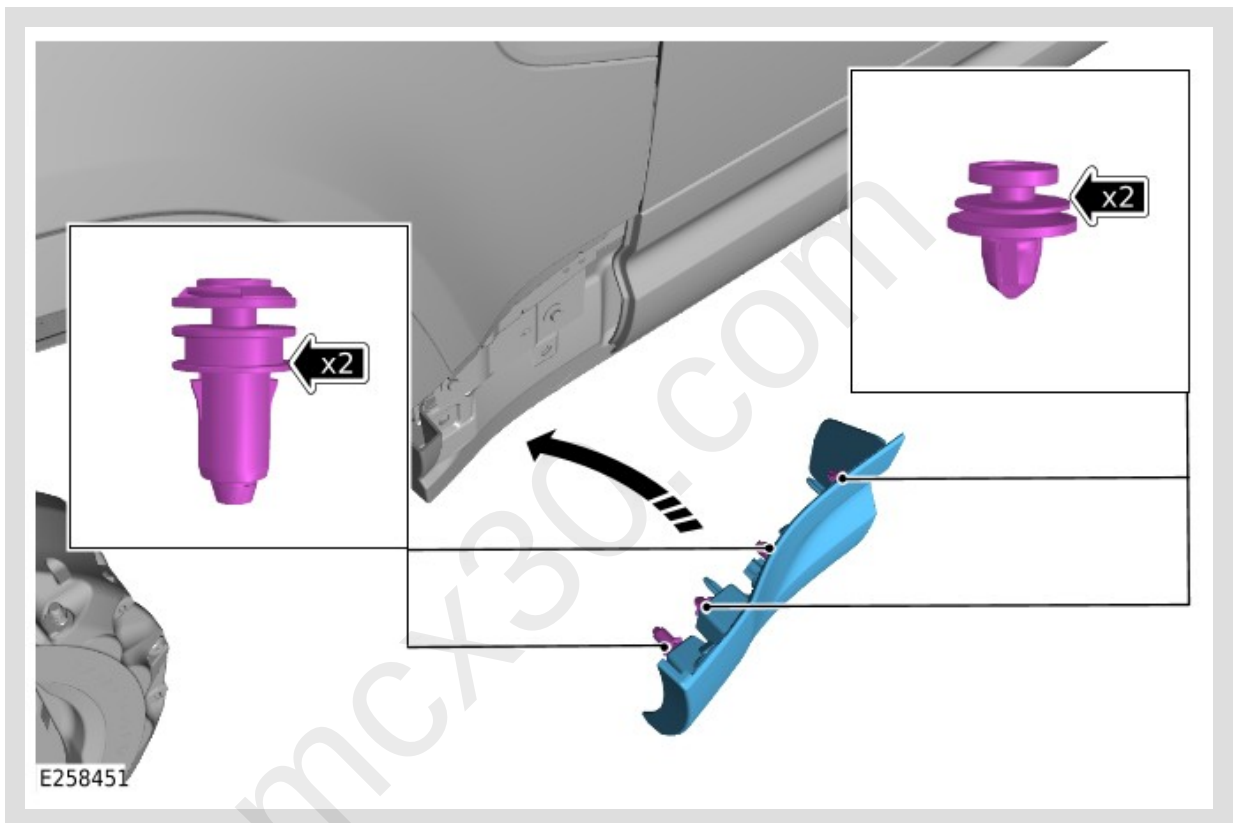

- Install the front fender moulding.
- Install the 4 clips.

2.

Make sure the fender moulding is correctly aligned to the surrounding bodywork.

Refer to: [Body and Frame - 110](#) (501-26 Body Repairs - Vehicle Specific Information and Tolerance Checks, Description and Operation).

Refer to: [Body and Frame - 90](#) (501-26 Body Repairs - Vehicle Specific Information and Tolerance Checks, Description and Operation).

3.

Reposition the front wheel.

mcx30.com