

PUBLISHED: 22-JAN-2020
2020.0 DEFENDER (LE), 501-08

EXTERIOR TRIM AND ORNAMENTATION

RADIATOR GRILLE (G2344767)

mcx30.com

REMOVAL


⚠ CAUTION:

Take extra care not to damage the surrounding components.

⚠ NOTE:


- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1.

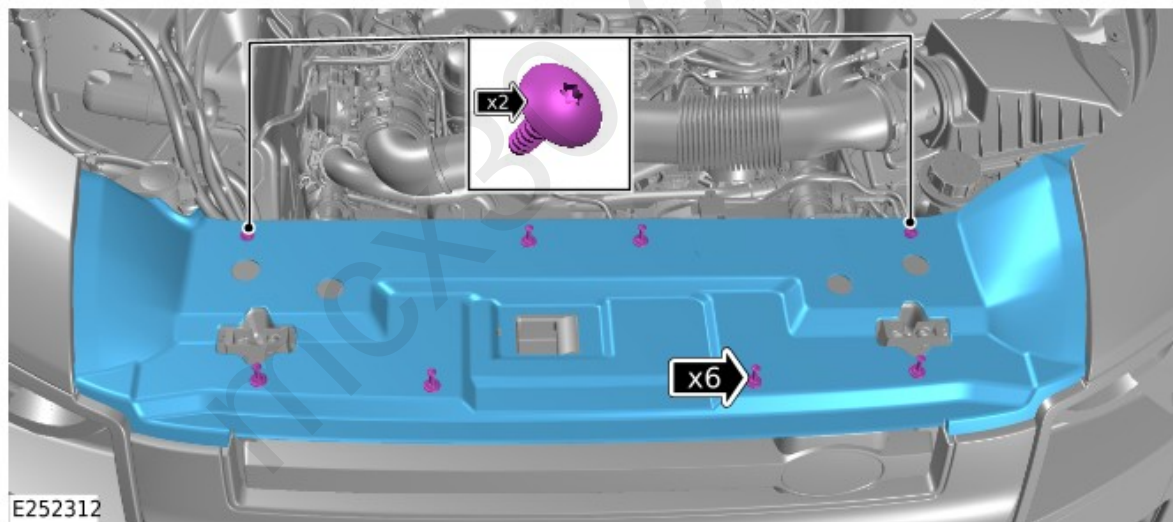


- Release the 6 clips.
- Remove the 2 bolts.
- Remove the upper radiator grille panel.

2.

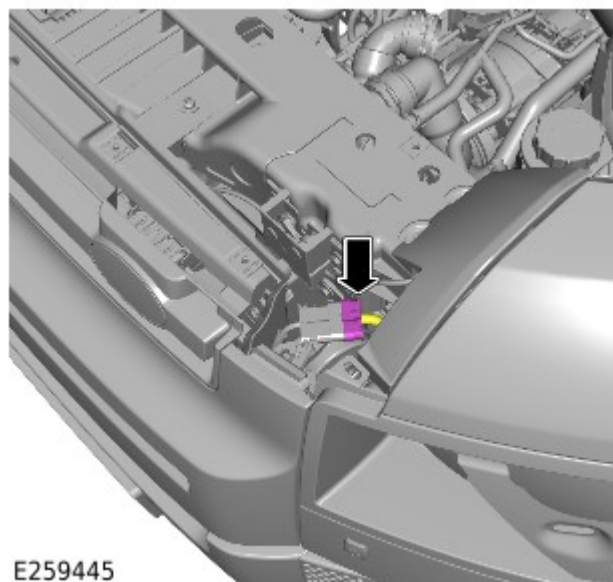

Disconnect the electrical connector.

3.

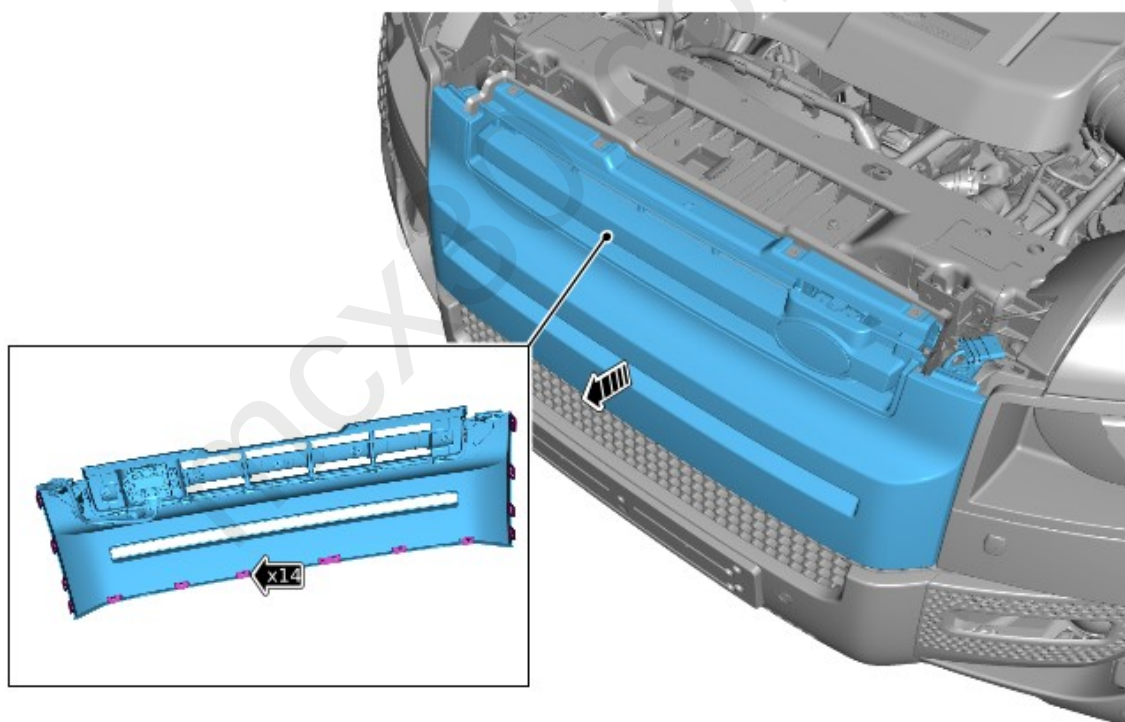


- Release the 14 clips.
- Remove the radiator grille.

4.


 NOTE:

Do not disassemble further if component if removed for access only.

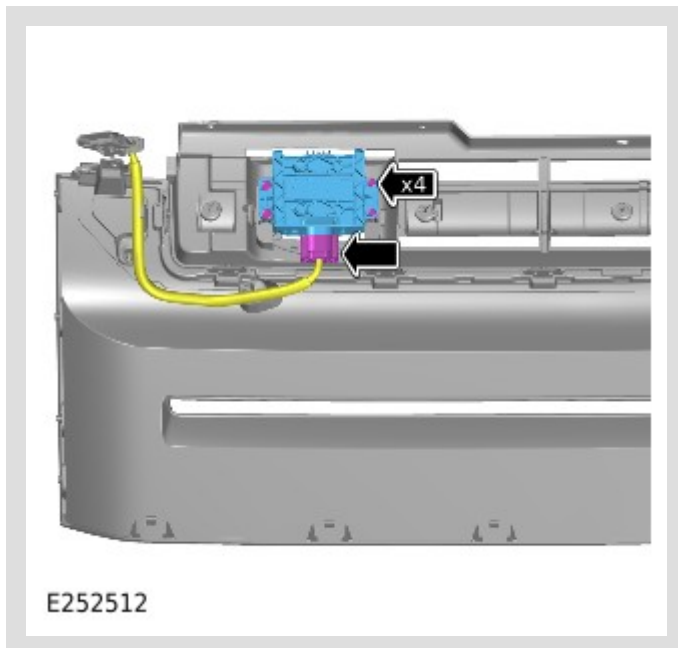

- Disconnect the electrical connector.
- Remove the 4 bolts.
- Remove the Cruise Control Module (CCM).

5.

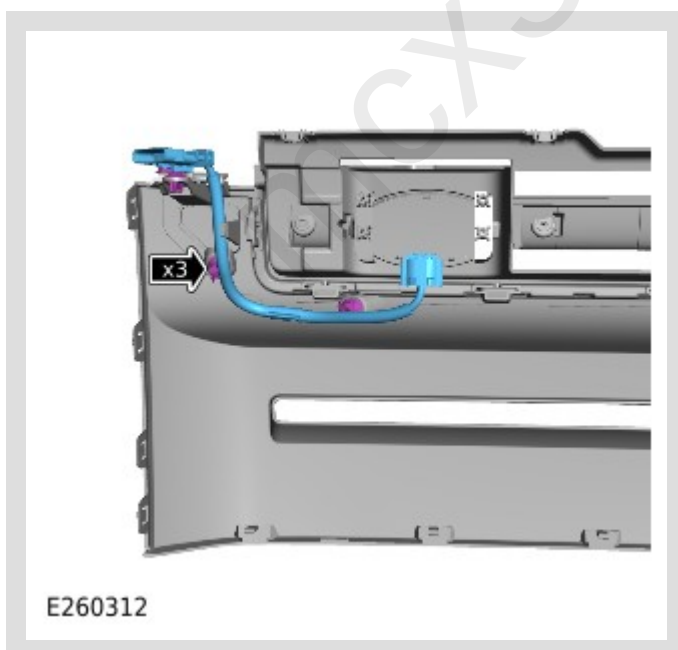

- Release the 3 clips.
- Remove the wiring harness.



- Release the 10 clips.
- Remove the upper grille.

mcx30.com

INSTALLATION

1.



NOTE:

Steps 1 - 3 are only required if the components were previously removed.

- Install the 10 clips.
- Install the upper grille.

2.

- Install the 3 clips.
- Install the wiring harness.

3.

- Install the CCM.
- Install and tighten the 4 bolts.
Torque: 3Nm
- Connect the electrical connector.

4.

- Install the 14 clips.
- Install the radiator grille.

5.

Connect the electrical connector.

6.

- Install the upper radiator grille panel.
- Install the 6 clips.
- Install the 2 bolts.
Torque: 3Nm