

PUBLISHED: 08-AUG-2019
2020.0 DEFENDER (LE), 501-08

EXTERIOR TRIM AND ORNAMENTATION

REAR QUARTER PANEL MOULDING (G2344759)

mcx30.com

GENERAL EQUIPMENT

EQUIPMENT NAME

Interior trim remover

REMOVAL

ⓘ CAUTION:

Always protect the paintwork and the window when removing exterior components.

⚠ NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains illustrations for left components, right components are similar.

1. Open the tailgate.


2.



Release the tailgate aperture seal as illustrated.

⚠ CAUTIONS:

- Do not use metal tools during this operation, removal of the component(s) must be completed with a plastic trim tool.
- Take extra care not to damage the component.

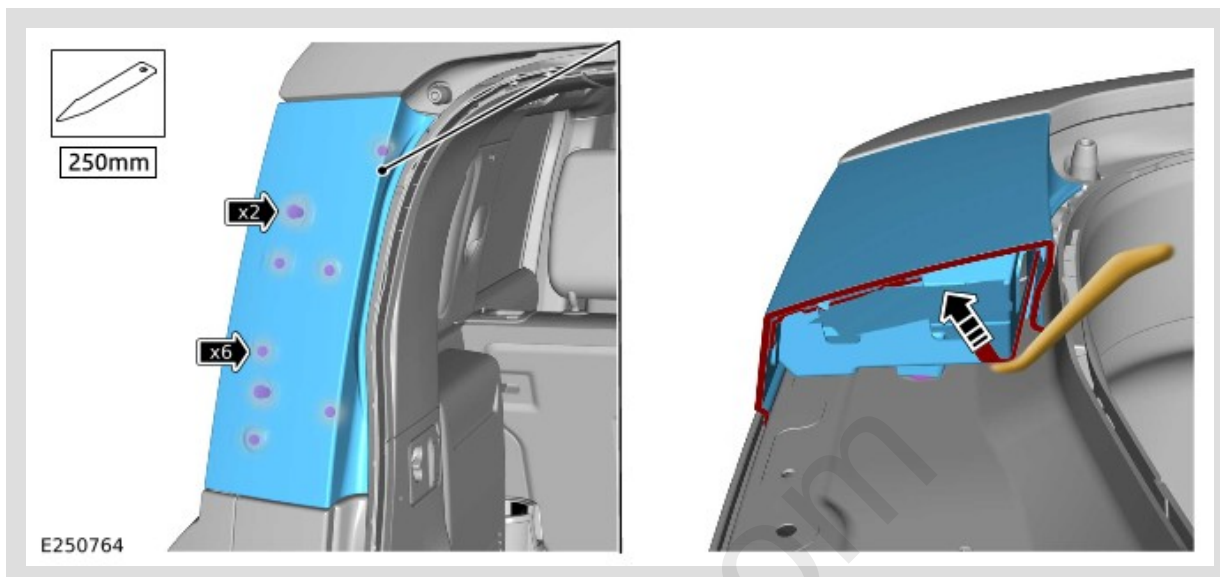

Use a suitable plastic trim tool to remove the rear quarter panel moulding at the 6 clips and the 2 guide pins, as illustrated.

General Equipment: [Interior trim remover](#)

INSTALLATION

1. Install the rear quarter panel moulding to the 6 clips.
2. Install the tailgate aperture seal.