

PUBLISHED: 13-FEB-2020
2020.0 DEFENDER (LE), 501-08

EXTERIOR TRIM AND ORNAMENTATION

ROOF PANEL MOULDING - 110 (G2344760)

mcx30.com

REMOVAL

 NOTE:

- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.


1.



E250074

Remove the 7 roof moulding covers.


2.

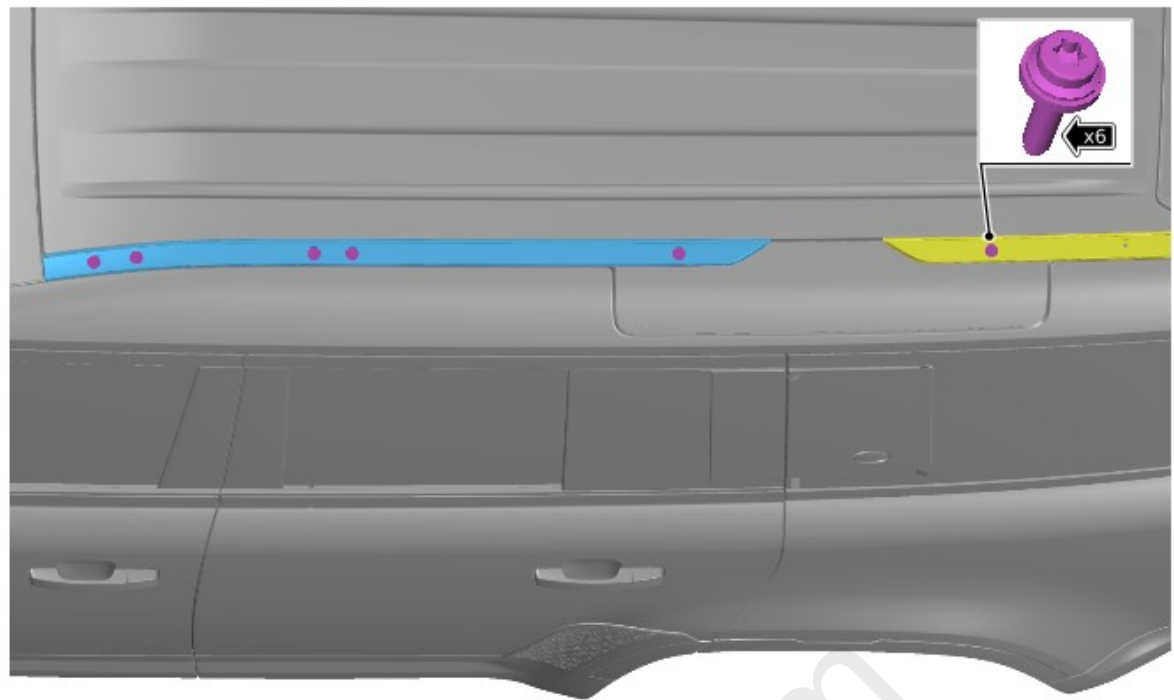

E252766

- Remove the 6 bolts.
- Remove the front section of the roof moulding.

3.

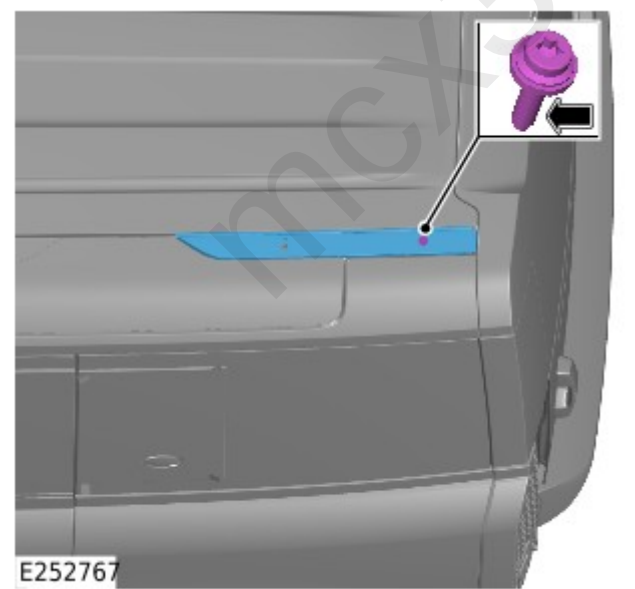

E252767

- Remove the bolt.
- Remove the rear section of the roof moulding.

INSTALLATION

1.

- Install the rear section of the roof moulding.
- Install and tighten the M6 bolt.

Torque: 8Nm

2.

- Install the front section of the roof moulding.
- Install and tighten the 6 M8 bolts.

Torque: 8Nm

3.

Install the 7 roof moulding covers.

cmjaGFyZG1vbnRvbjsyMDIwLTA5LTE4VDEyOjExOjAyLjg4Mlo7OTIuNDAuMTg5LjUwOw==

mcx30.com