

PUBLISHED: 16-APR-2020
2020.0 DEFENDER (LE), 501-08

EXTERIOR TRIM AND ORNAMENTATION

ROCKER PANEL MOULDING – 90 (G2453717)

mcx30.com

REMOVAL




NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains illustrations for left components, right components are similar.

1. Raise and support the vehicle on a suitable 2-post lift.
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).


2. Remove the front fender moulding.
Refer to: [Front Fender Moulding](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).

3.

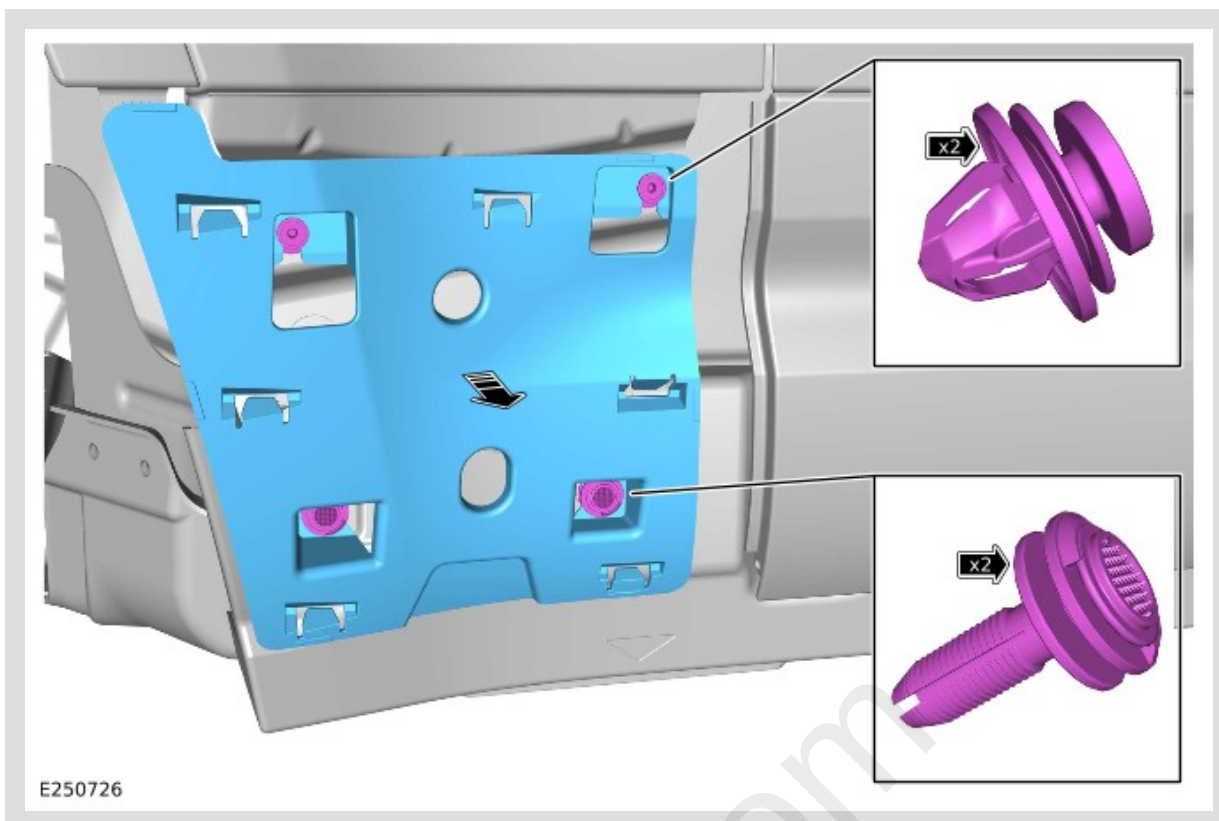

- Remove the 2 lower clips.
- Release the 2 upper clips.
- Remove the front fender moulding bracket.

4.

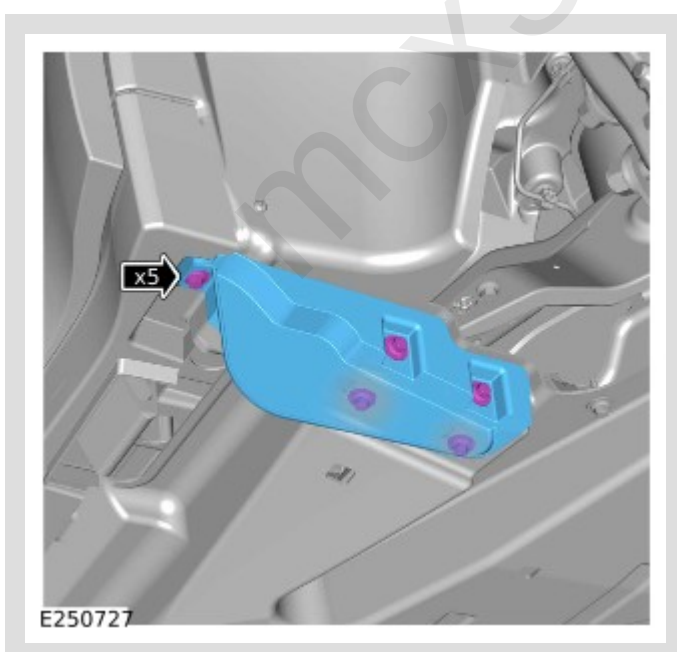


- Remove the 5 bolts.
- Remove the rear wheel arch liner finisher panel.

5.

⚠ CAUTION:

Take extra care not to damage the component.

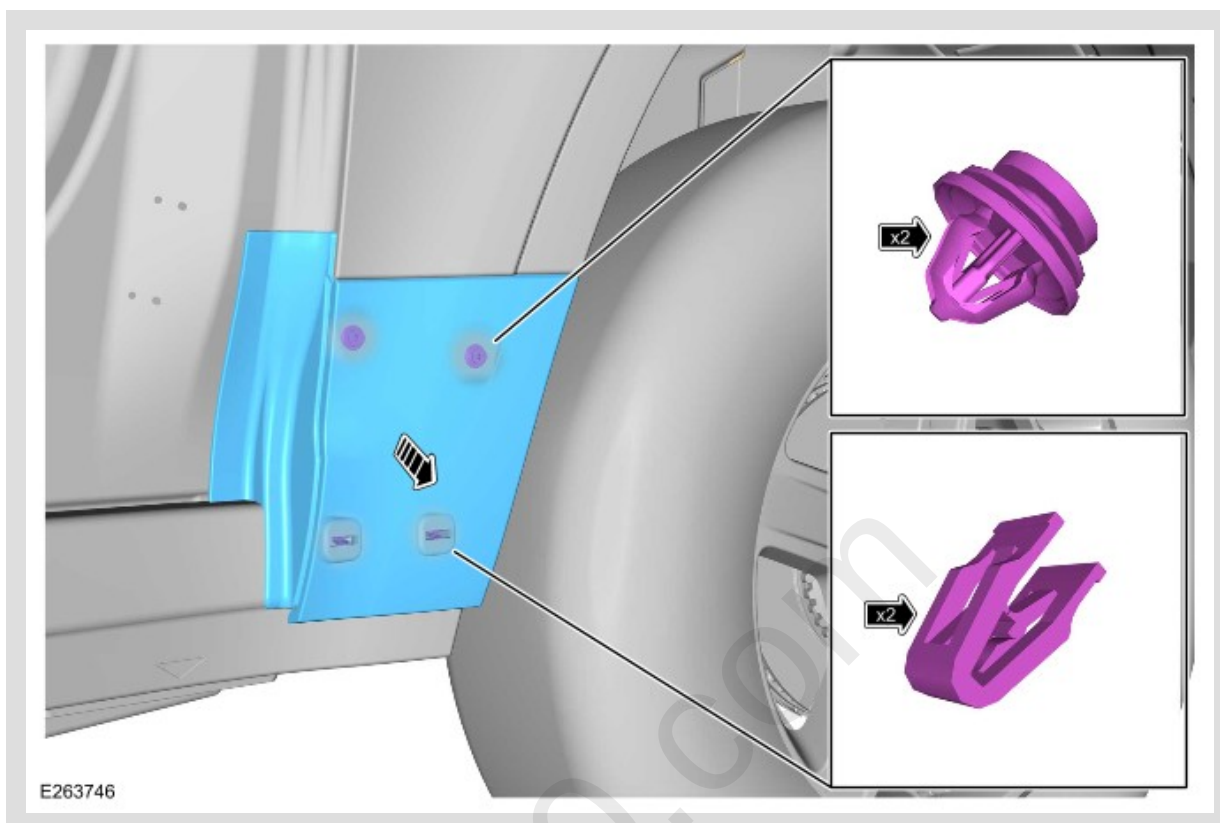

Remove the rear fender moulding at the 4 clips.

6.




Remove the 6 screws.

7.

⚠ CAUTION:

Take extra care not to damage the component.

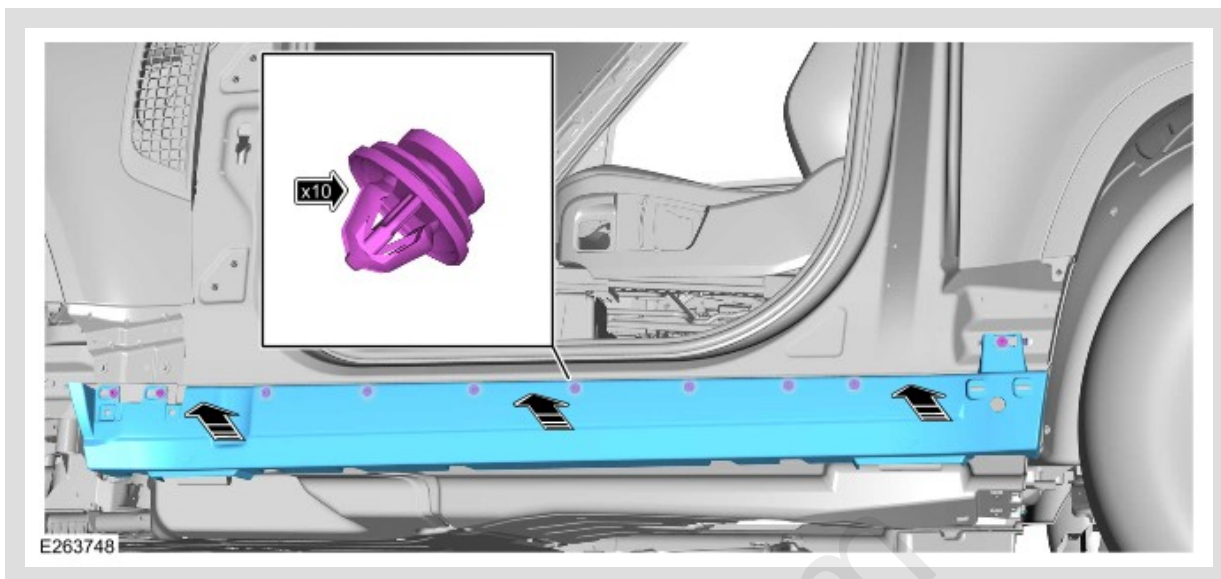

Remove the rocker panel at the 10 clips.

INSTALLATION

1.

⚠ CAUTION:

Take extra care not to damage the component.

- Install the rocker panel at the 10 clips.
- Install the 6 lower screws.

2.

⚠ CAUTION:

Take extra care not to damage the component.

Install the rear fender moulding at the 4 clips.

3.

- Install the rear wheel arch liner finisher panel.
- Install and tighten the 5 bolts.
Torque: 4.1Nm

4.

- Install the front fender moulding bracket to the 2 clips.
- Install and secure the 2 lower clips.

5.

Install the front fender moulding.

Refer to: [Front Fender Moulding](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).