

PUBLISHED: 19-NOV-2019
2020.0 DEFENDER (LE), 501-08

EXTERIOR TRIM AND ORNAMENTATION

REAR WHEEL ARCH LINER (G2409475)

mcx30.com

REMOVAL


 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains illustrations for left side components, right side components are similar.

1. Raise and support the vehicle on a suitable 2 post lift.
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).

2. Remove the wheel and tire.
Refer to: [Wheel and Tire](#) (204-04 Wheels and Tires, Removal and Installation).


- 3.

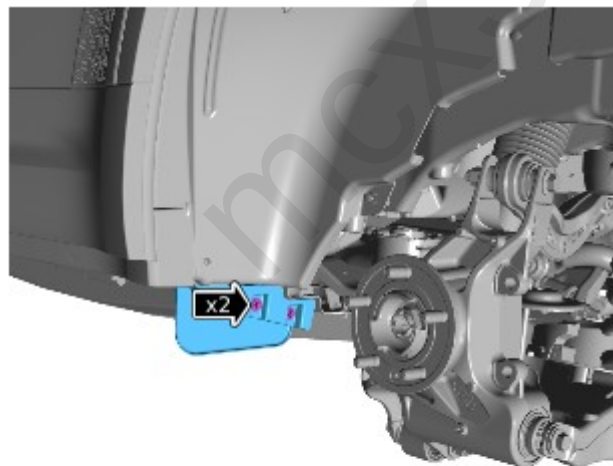

E249445


- Remove the 2 bolts.
- Remove the rear wheel arch air deflector.

4.

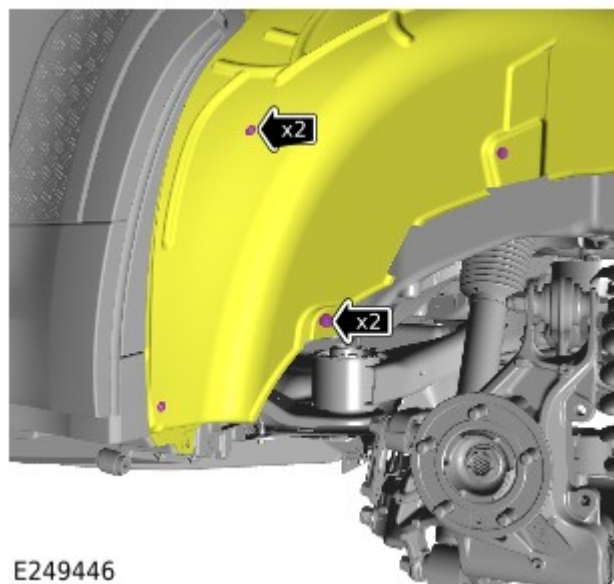


- Remove the 2 bolts.
- Release the 2 clips.
- Release the front section of the wheel arch liner.

5.

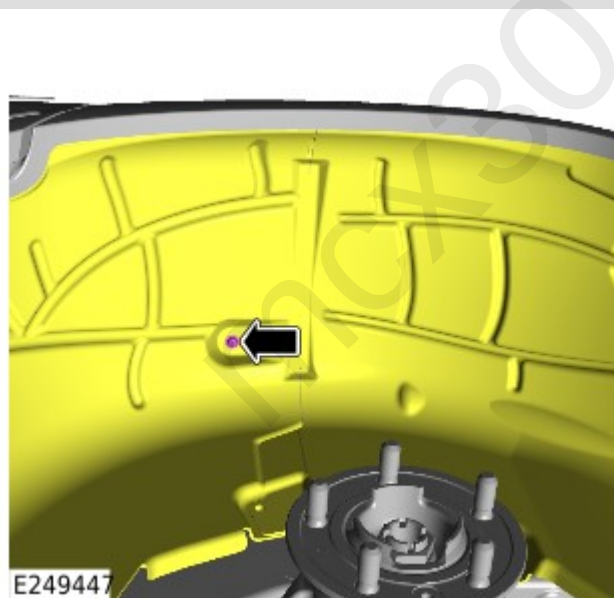


- Remove the bolt.
- Release the upper section of the wheel arch liner.

6.

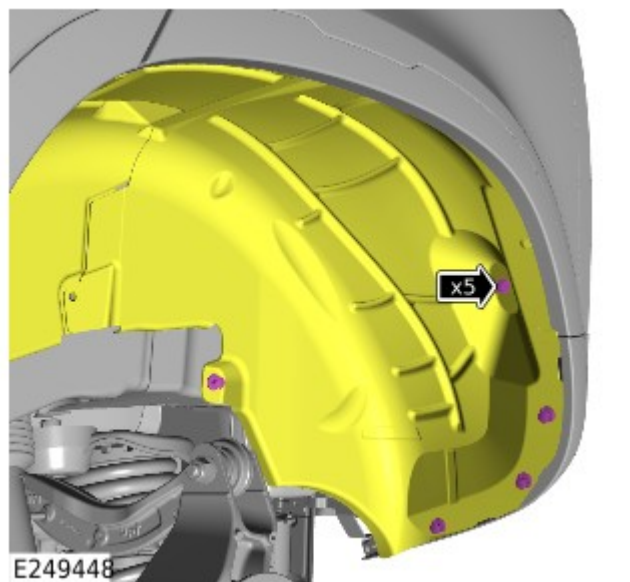

- Release the 5 clips.
- Release the rear section of the wheel arch liner.

7.

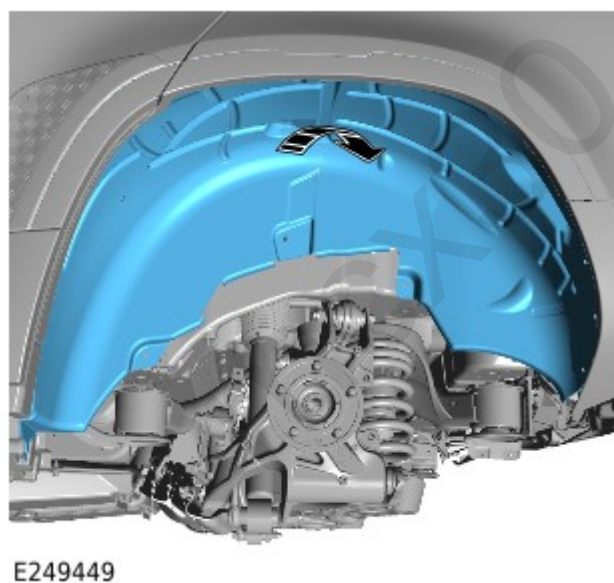

Remove the rear wheel arch liner.

INSTALLATION

1.

- Install the rear wheel arch liner.
- Install the 5 clips.

2.

- Install and tighten the bolt.
Torque: 10Nm

3.

- Install and tighten the 2 bolts.
Torque: 10Nm
- Install the 2 clips.

4.

- Install the rear wheel arch air deflector.
- Install and tighten the 2 bolts.
Torque: 10Nm

5.

Install the wheel and tire.

Refer to: [Wheel and Tire](#) (204-04 Wheels and Tires, Removal and Installation).