

PUBLISHED: 29-JAN-2020
2020.0 DEFENDER (LE), 501-10

SEATING

FRONT ROW SEAT CUSHION BLOWER (G2344850)

mcx30.com

REMOVAL

 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.


1. Remove the front row seat.

Refer to: [Front Row Seat - Vehicles With: Power Seats](#) (501-10 Seating, Removal and Installation).

- 2.

 CAUTION:

Take extra care not to damage the wiring harnesses.

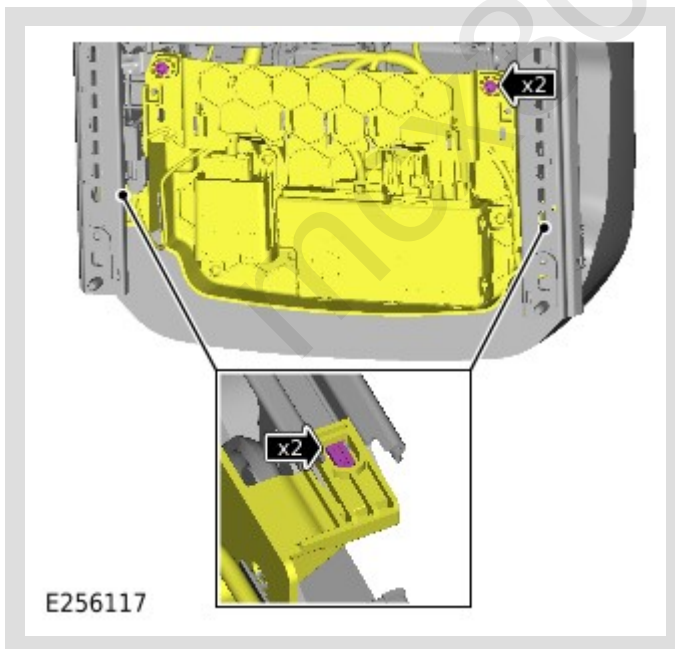


- Remove the 2 screws.
- Release the 2 clips.
- Reposition the front seat tray to get access to the lower blower motor screws.

3.



Disconnect the blower motor electrical connector.

4.

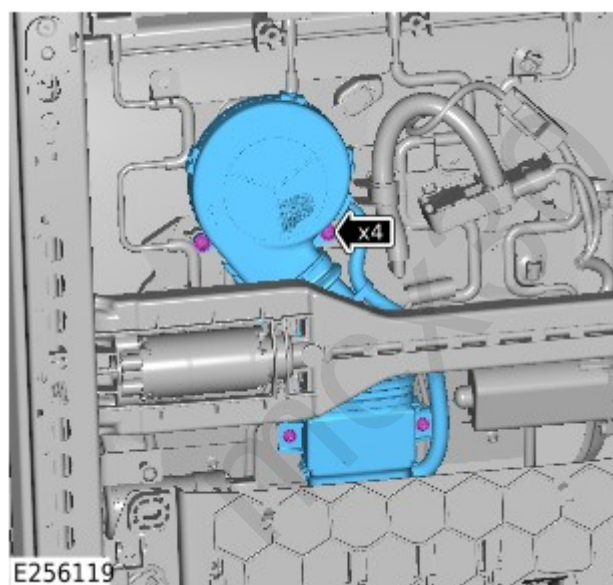

- Remove the 4 screws.
- Remove the front row seat cushion blower.

INSTALLATION

1.

- Install the front row seat cushion blower.
- Install and tighten the 4 screws.

2.

Connect the blower motor electrical connector.

3.

- Reposition the front seat tray in to the correct position.
- Install the 2 clips.
- Install and tighten the 2 screws.

4.

Install the front row seat.

Refer to: [Front Row Seat - Vehicles With: Power Seats](#) (501-10 Seating, Removal and Installation).