

PUBLISHED: 10-DEC-2019
2020.0 DEFENDER (LE), 501-10

SEATING

FRONT ROW SEAT HEAD RESTRAINT (G2414577)

mcx30.com

REMOVAL

 NOTE:


- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations for the left side components, right side components are similar.

1. Remove the front row seat.

Refer to: [Front Row Seat - Vehicles With: Power Seats](#) (501-10 Seating, Removal and Installation).


Refer to: [Front Row Seat - Vehicles Without: Power Seats](#) (501-10 Seating, Removal and Installation).

- 2.

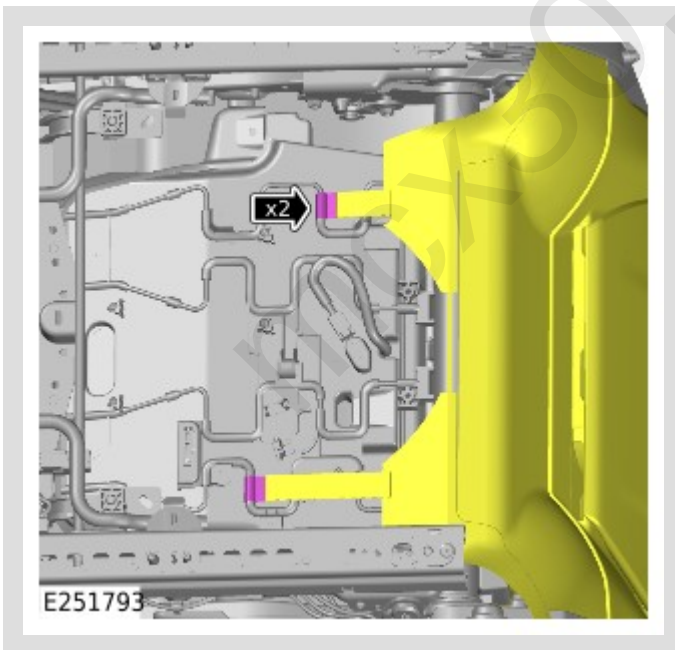

Release the 2 trim panel straps.

3.

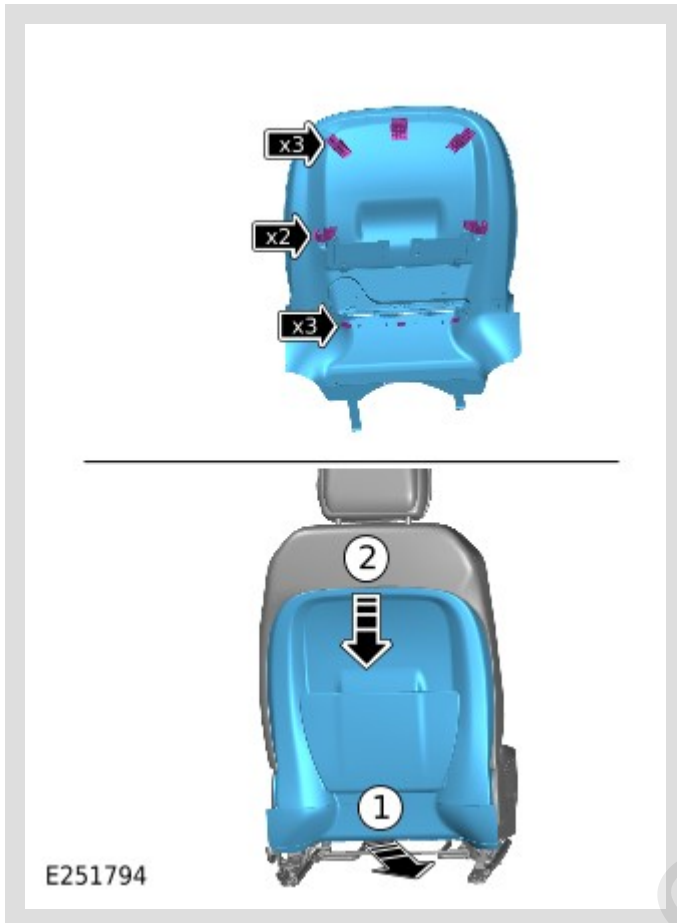


- Release the trim panel from the 8 clips.
- Remove the trim panel as illustrated.

4.



- Release the front row seat backrest cover upper clip.
- Reposition the backrest cover to access the head restraint bracket.

5.

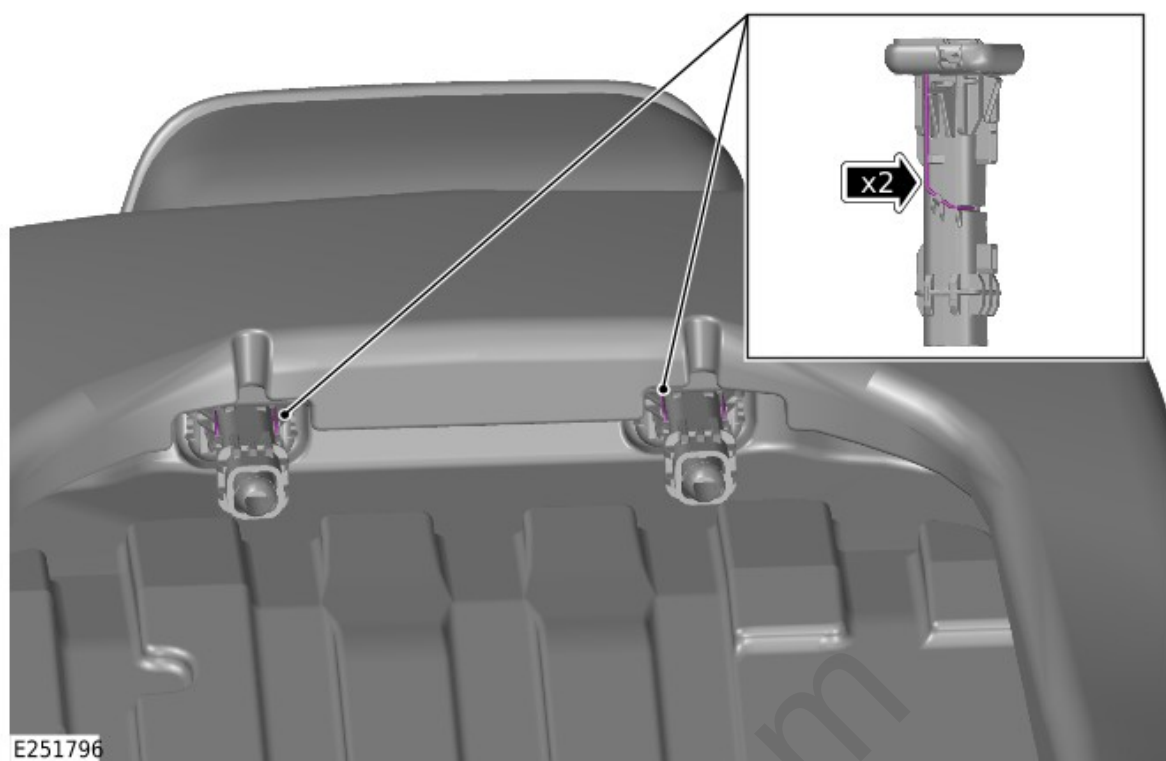

Release the 2 clips from the head restraint bracket.

6.



Remove the head restraint.

INSTALLATION

1.



NOTE:

An audible click will be heard as each side of the headrest is installed to the correct location.

Install the head restraint.

2.

- Reposition the front row seat backrest cover to the correct location.
- Install the upper clip.

3.

- Install the trim panel.
- Install the 8 clips.

4.

Install the trim panel straps.

5.

Install the front row seat.

Refer to: [Front Row Seat - Vehicles With: Power Seats](#) (501-10 Seating, Removal and Installation).

Refer to: [Front Row Seat - Vehicles Without: Power Seats](#) (501-10 Seating, Removal and Installation).