

PUBLISHED: 03-MAR-2020
2020.0 DEFENDER (LE), 501-10

SEATING

SECOND ROW SEAT TRACK COVER TRIM (G2413832)

mcx30.com

REMOVAL

 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Disconnect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).


2. Remove the second row right seat.

Refer to: [Second Row Right Seat - 110](#) (501-10 Seating, Removal and Installation).

3. Remove the second row left seat.

Refer to: [Second Row Left Seat - 110](#) (501-10 Seating, Removal and Installation).

4.

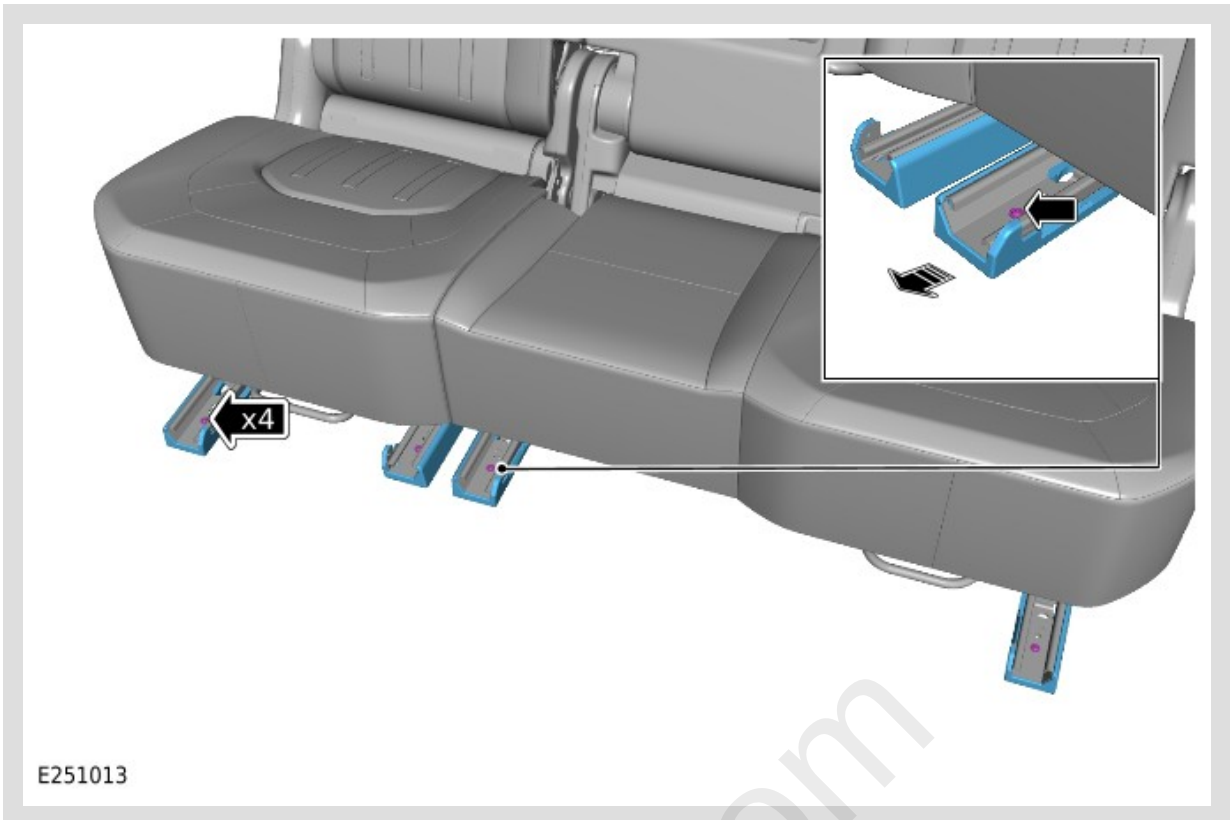

- Remove the 4 bolts.
- Remove the 4 cover trims from the second row seat tracks.

INSTALLATION

1.
 - Install the 4 cover trims to the second row seat tracks.
 - Install and tighten the 4 bolts.

Torque: 1.4Nm

2. Install the second row right seat.
Refer to: [Second Row Right Seat - 110](#) (501-10 Seating, Removal and Installation).

3. Install the second row left seat.
Refer to: [Second Row Left Seat - 110](#) (501-10 Seating, Removal and Installation).

4. Connect the startup battery ground cable.
Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).