

PUBLISHED: 14-OCT-2019
2020.0 DEFENDER (LE), 501-11

GLASS, FRAMES AND MECHANISMS

REAR DOOR WINDOW CONTROL SWITCH (G2423945)

mcx30.com

REMOVAL

 NOTES:

- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.


1. Disconnect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

2. Remove the rear door trim panel.

Refer to: [Rear Door Trim Panel](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

- 3.

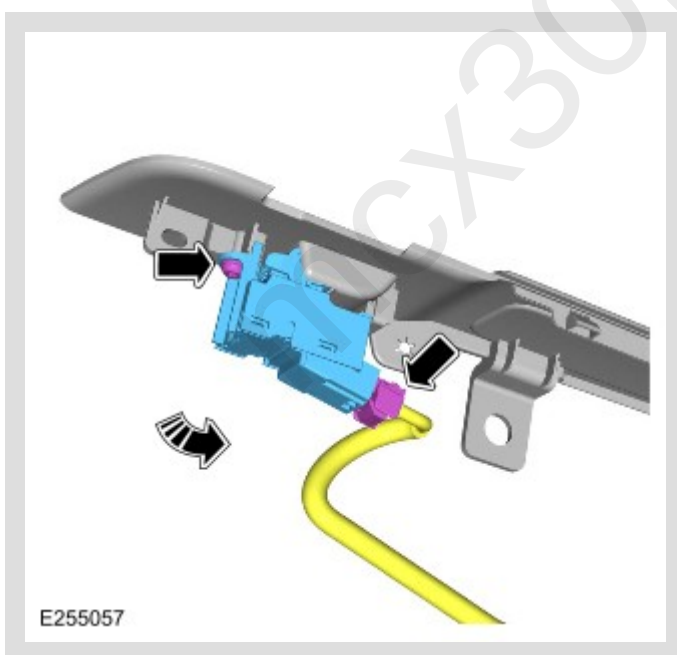

- Disconnect the electrical connector from the rear door window control switch.
- Remove the screw.
- Remove the rear door window control switch as illustrated.

INSTALLATION

1.

- Install the rear door window control switch.
- Install and tighten the screw.
Torque: 2Nm
- Connect the electrical connector to the rear door window control switch.

2.

Install the rear door trim panel.

Refer to: [Rear Door Trim Panel](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

3.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).