

PUBLISHED: 08-SEP-2020
2020.0 DEFENDER (LE), 501-11

GLASS, FRAMES AND MECHANISMS

WINDSHIELD MOULDING (G2412912)

mcx30.com

REMOVAL

⚠ CAUTION:

Always protect paintwork and windows when removing exterior components.

△ NOTES:


- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains illustrations for left side components, right side components are similar.

1. Open the front door.

2.

⚠ CAUTION:


Take extra care not to damage the component.

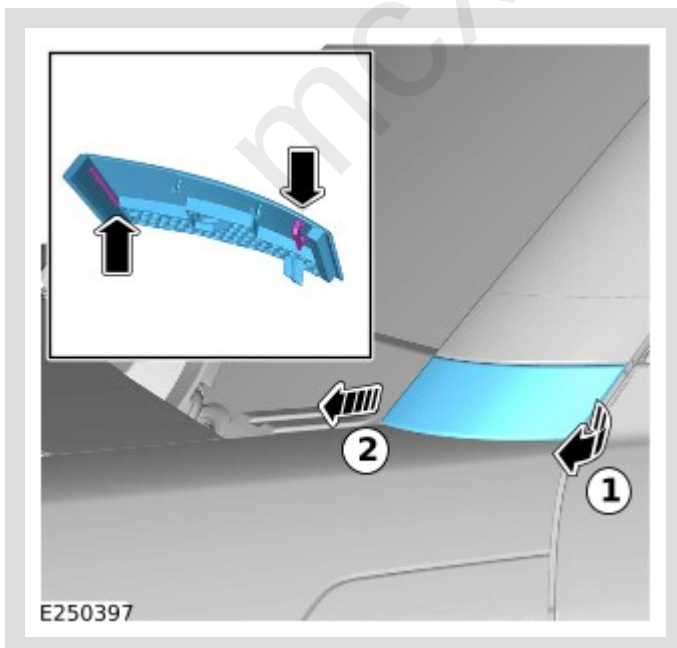

- Carefully release the 2 clips.
- Remove the bolt cover.

ⓘ CAUTIONS:

- Take extra care not to damage the component.
- Do not use tools during this operation, removal of the component(s) must be completed by hand.

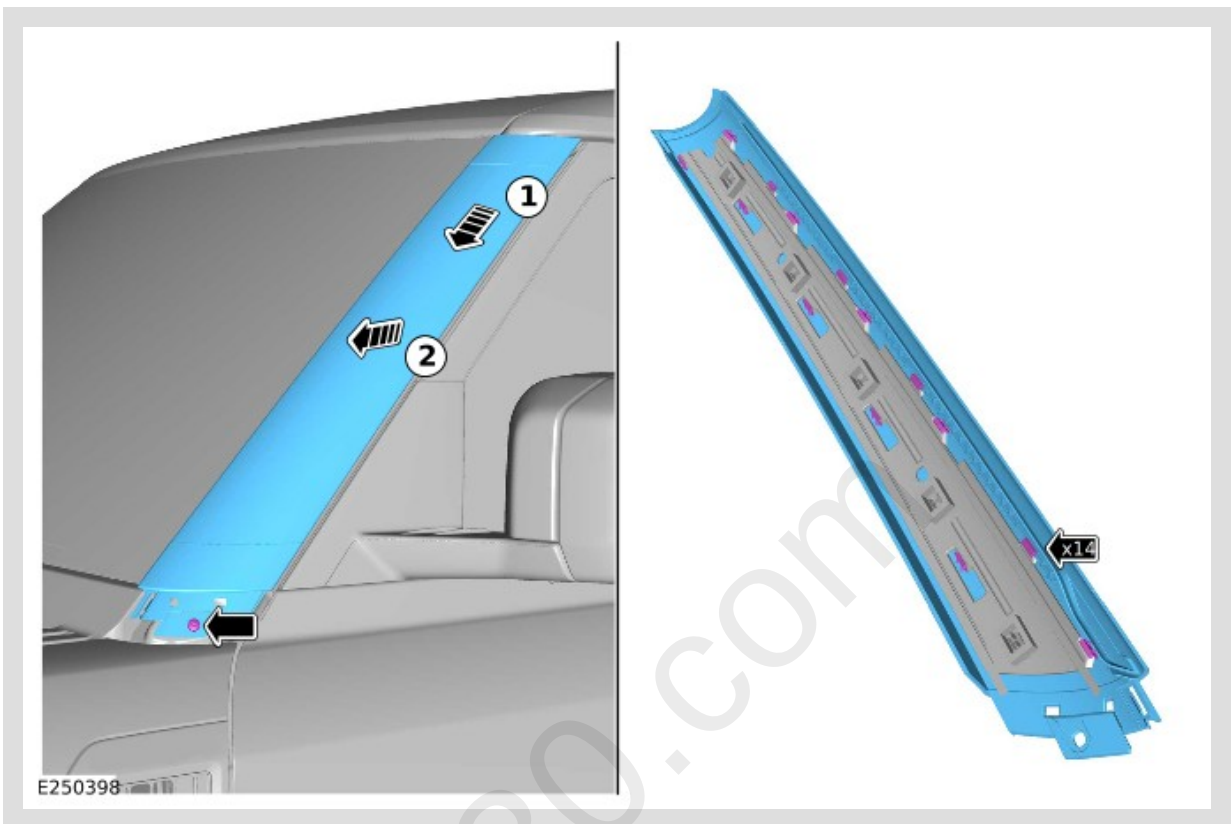


- Remove the bolt.
- Remove the windshield moulding.

1.



⚠ CAUTION:

Take extra care not to damage the contrast roof finisher decal when installing the windshield moulding.

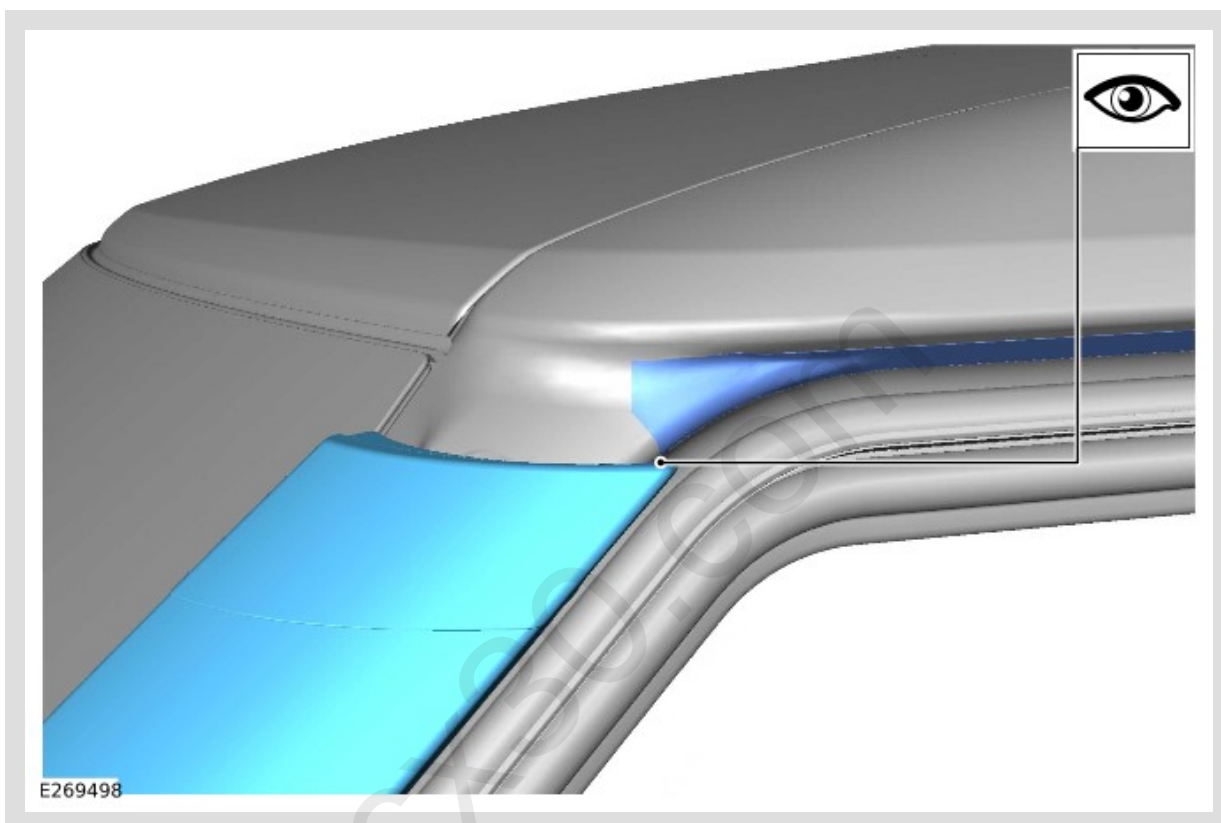

This step contains information for the following steps.

 **NOTE:**

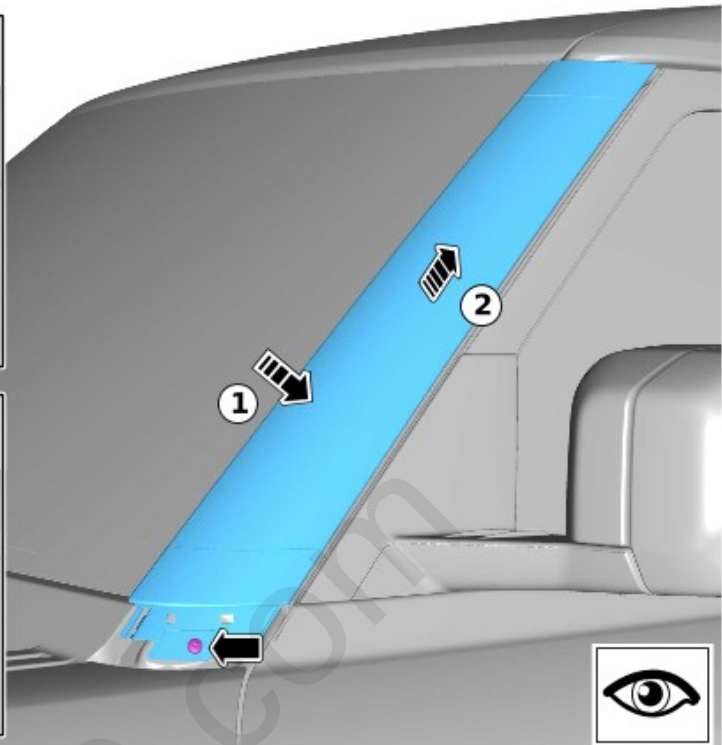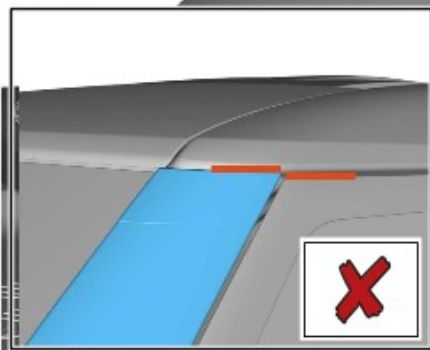

- Torque: 6Nm*

⚠ CAUTION:

Take extra care not to damage the component.

Install the bolt cover to the 2 clips.

Close the front door.