

PUBLISHED: 06-AUG-2019
2020.0 DEFENDER (LE), 501-12

INSTRUMENT PANEL AND CONSOLE

FLOOR CONSOLE STOWAGE COMPARTMENT (G2408455)

mcx30.com

REMOVAL

 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.


1. Disconnect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

2. Remove the floor console upper section.

Refer to: [Floor Console Upper Section](#) (501-12 Instrument Panel and Console, Removal and Installation).

- 3.

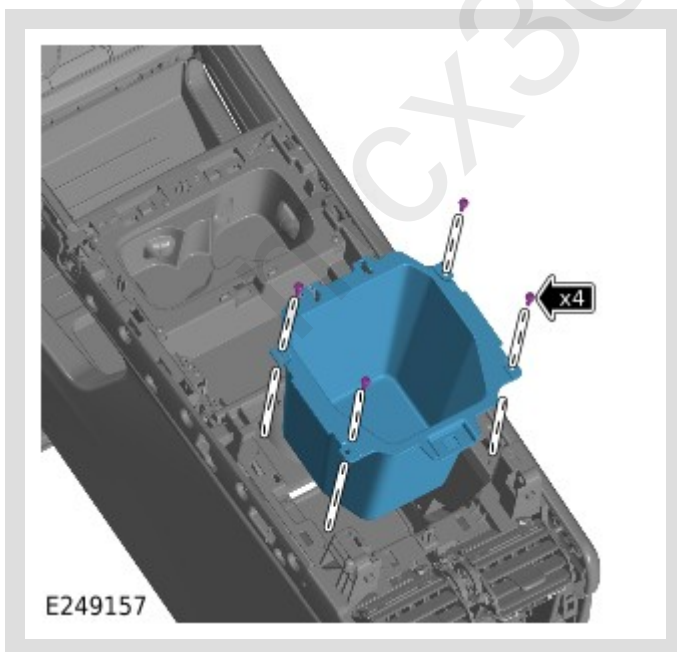

- Remove the 4 bolts.
- Remove the floor console rear stowage compartment.

INSTALLATION

1.

- Install the floor console rear stowage compartment.
- Install and tighten the 4 bolts.

Torque: 1.7Nm

2.

Install the floor console upper section.

Refer to: [Floor Console Upper Section](#) (501-12 Instrument Panel and Console, Removal and Installation).

3.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

cmjjeGFyZG1vcnRvbjsyMDIwLTA5LTE4VDEzOjA1OjU0LjAzM1o7OTluNDYuMTg5LjUzOw==

mcx30.com