

PUBLISHED: 21-JAN-2020
2020.0 DEFENDER (LE), 501-12

INSTRUMENT PANEL AND CONSOLE

FLOOR CONSOLE UPPER SECTION (G2344748)

mcx30.com

REMOVAL

 CAUTION:

Do not use excessive force to remove the component. Make sure that all fixings are fully released.

 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Remove both front row seats.

Refer to: [Front Row Seat - Vehicles With: Power Seats](#) (501-10 Seating, Removal and Installation).

Refer to: [Front Row Seat - Vehicles Without: Power Seats](#) (501-10 Seating, Removal and Installation).

2. Disconnect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

3. Remove the front floor console stowage compartment lid.


Refer to: [Floor Console Stowage Compartment Lid](#) (501-12 Instrument Panel and Console, Removal and Installation).

4.



Remove the rubber mat from floor console.

5.

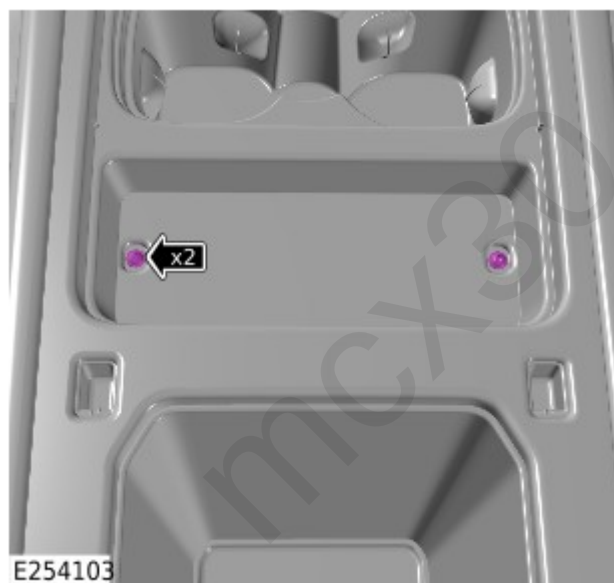


Remove the 2 screws.

6.

 NOTE:

This step must be done on both sides of the vehicle.

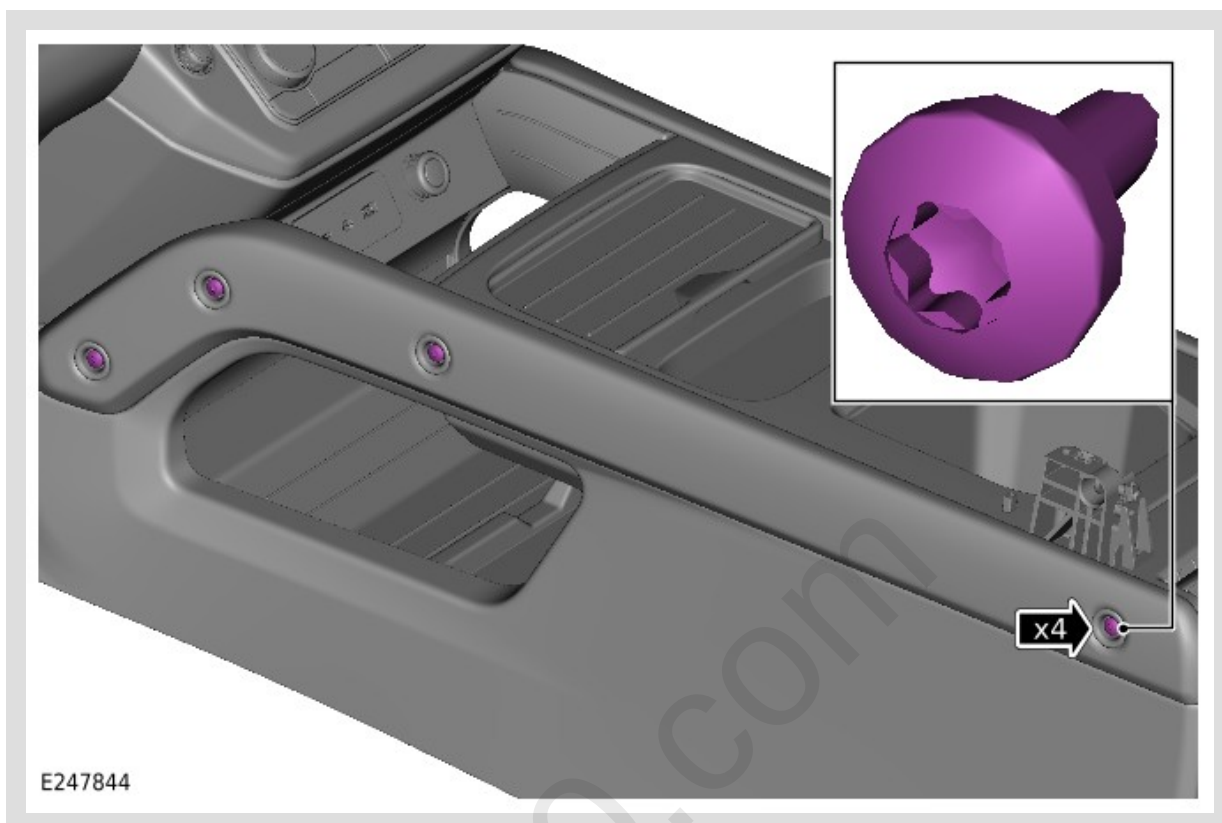


Remove the 4 bolts.


7.

 NOTE:

This step must be done on both sides of the vehicle.

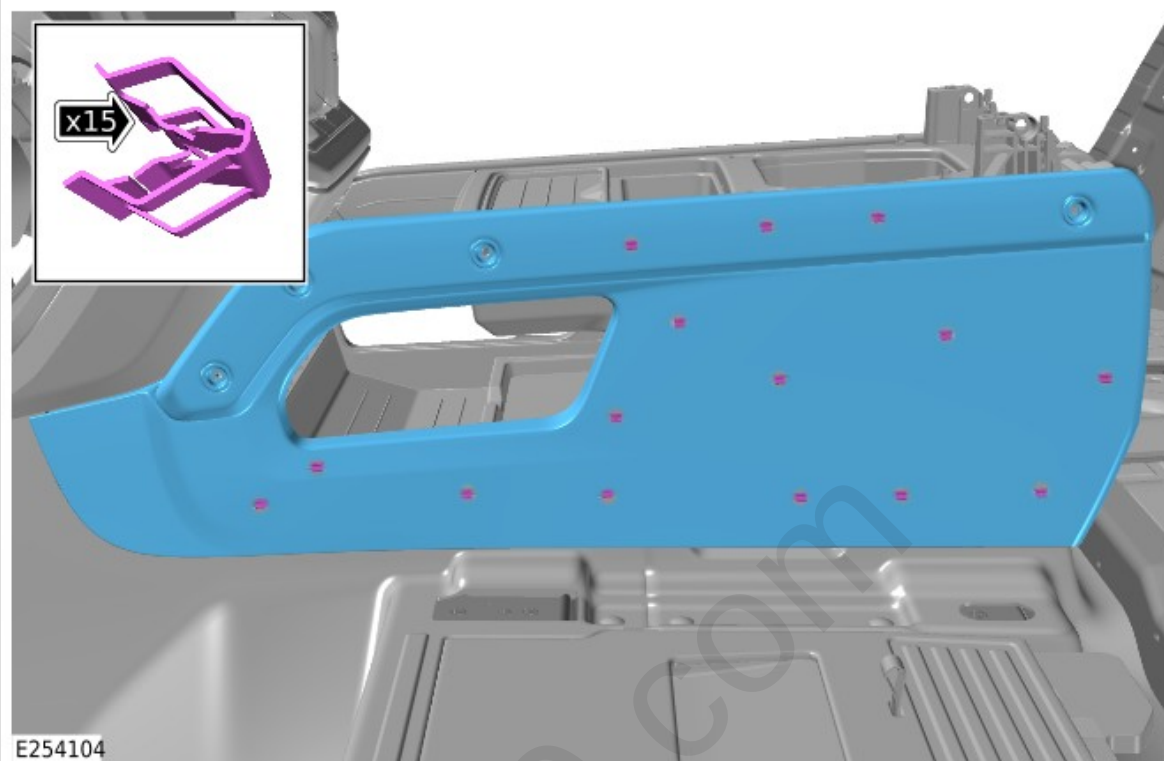


- Release the 15 clips.
- Remove the trim panel from the side of the floor console.

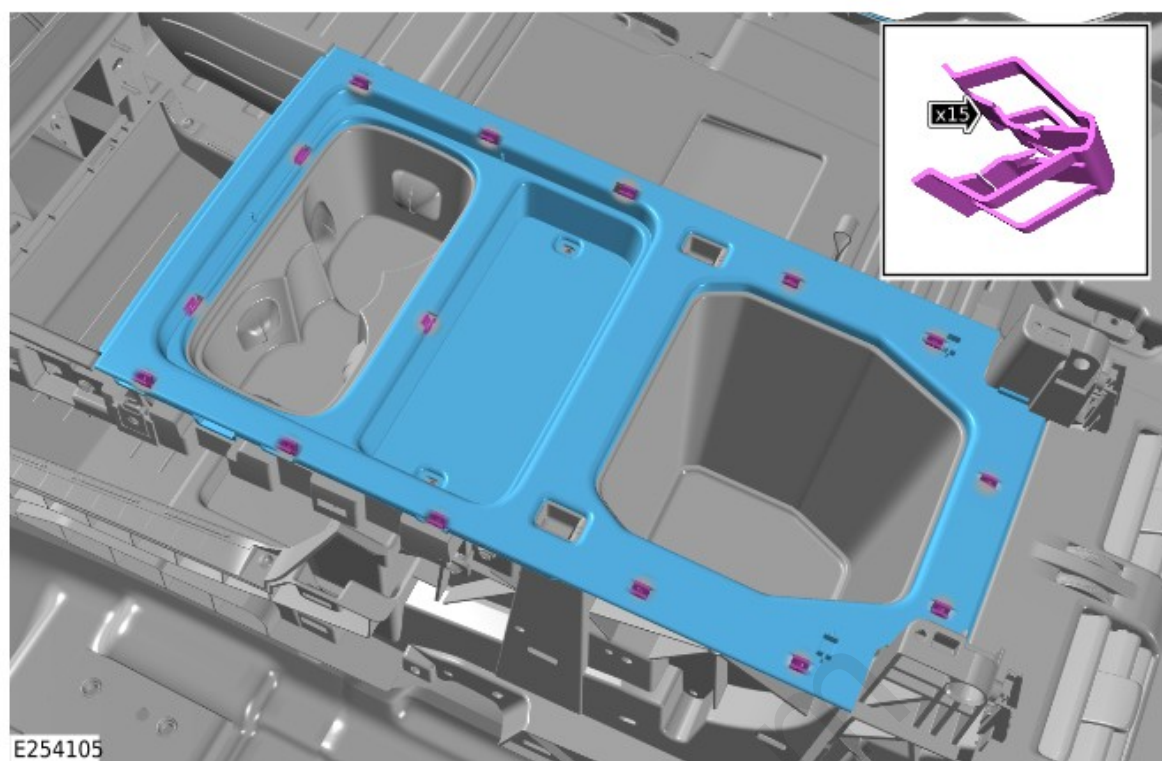

- Release the 15 clips.
- Remove the upper section of the floor console.

 NOTE:

Do not complete this step if the component is removed for access only.

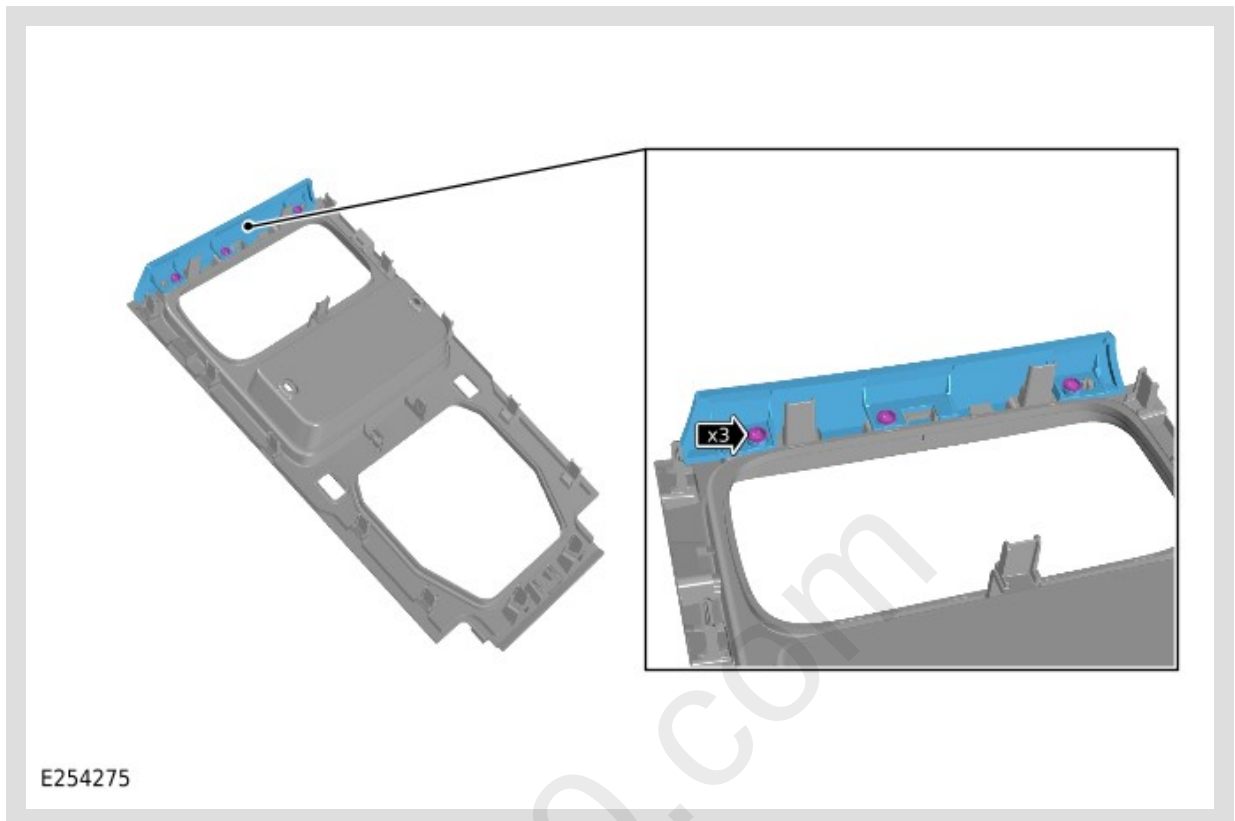

- Remove the 3 screws.
- Remove the front trim from the upper section of the floor console.

INSTALLATION

1.



NOTE:

Only complete this step if the component was previously removed.

- Install the front trim to the upper section of the floor console.
- Install and tighten the 3 screws.

Torque: 1.2Nm

2.

- Install the 15 clips.
- Install the upper section of the floor console.

3.



NOTE:

This step must be done on both sides of the vehicle.

- Install the 15 clips.
- Install the trim panel to the side of the floor console.

4.



NOTES:

- This step must be done on both sides of the vehicle.
- Make sure that the bolts are centered in the bolt hole.

- Install and tighten the 4 bolts.

Torque: 2.2Nm

5.

Install and tighten the 2 upper screws.

Torque: 1.7Nm

6.

Install the rubber mat into the floor console.

7.

Install the front floor console stowage compartment lid.

Refer to: [Floor Console Stowage Compartment Lid](#) (501-12 Instrument Panel and Console, Removal and Installation).

8.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

9.

Install both front row seats.

Refer to: [Front Row Seat - Vehicles With: Power Seats](#) (501-10 Seating, Removal and Installation).

Refer to: [Front Row Seat - Vehicles Without: Power Seats](#) (501-10 Seating, Removal and Installation).

cmjjaGFyZG1vcnRvbjsyMDIwLTA5LTE4VDEzOjA3QjA3LjUzOVo7OTIuNDYuMTg5LjUzOw==

mcx30.com