

PUBLISHED: 23-JAN-2020
2020.0 DEFENDER (LE), 501-12

INSTRUMENT PANEL AND CONSOLE

GLOVEBOX (G2401278)

mcx30.com

REMOVAL

⚠ CAUTION:

Do not use excessive force to remove the component. Make sure that all fixings are fully released.


△ NOTE:

- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- Make sure that the retaining clips are correctly installed.

1. Disconnect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

- 2.

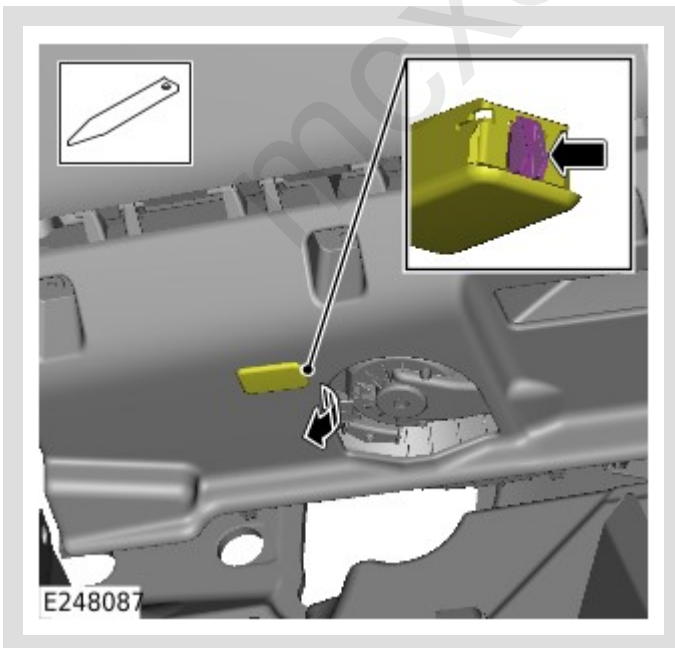


Use a suitable tool to release the footwell lamp.

3.



- Disconnect the electrical connector.
- Remove the footwell lamp.

4.

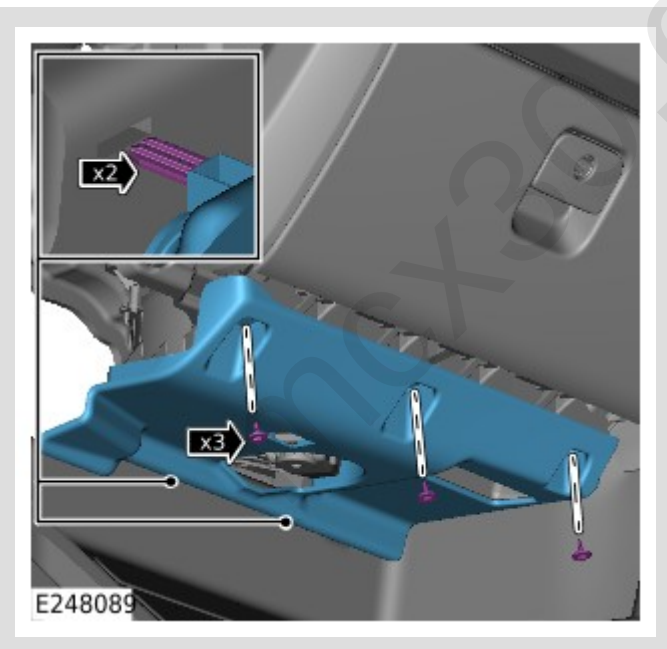


- Remove the 3 bolts.
- Release the 2 clips.
- Remove the instrument panel lower trim.

5.




- Remove the 4 bolts.
- Remove the instrument panel passenger side trim.

6.

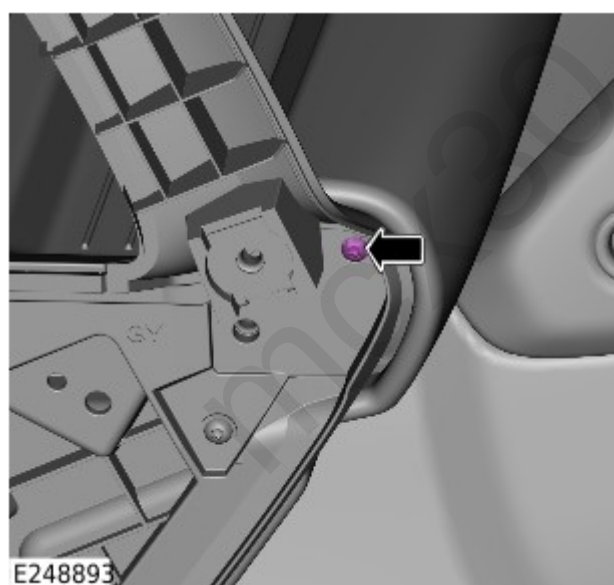


Remove the bolt.

7.

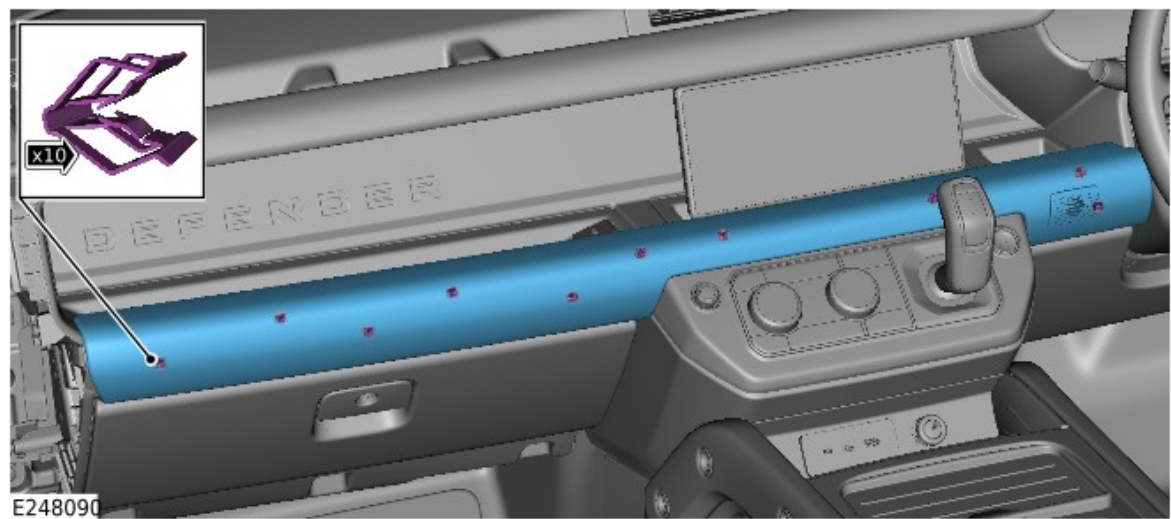


- Release the 10 clips.
- Remove the instrument panel trim.

8.

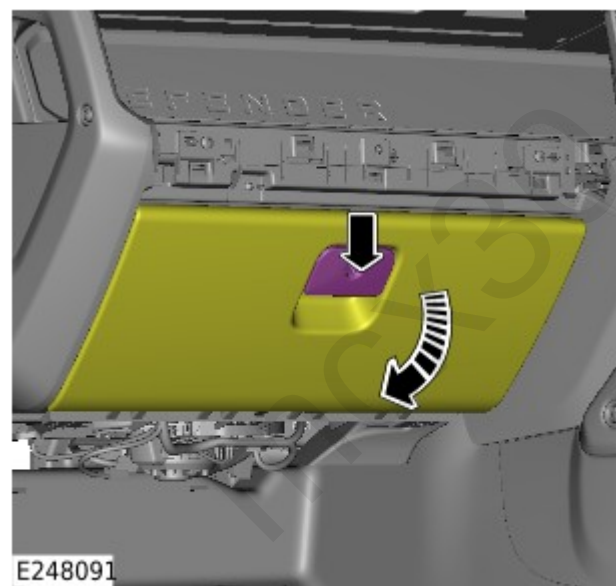


Open the glovebox lid.

9.

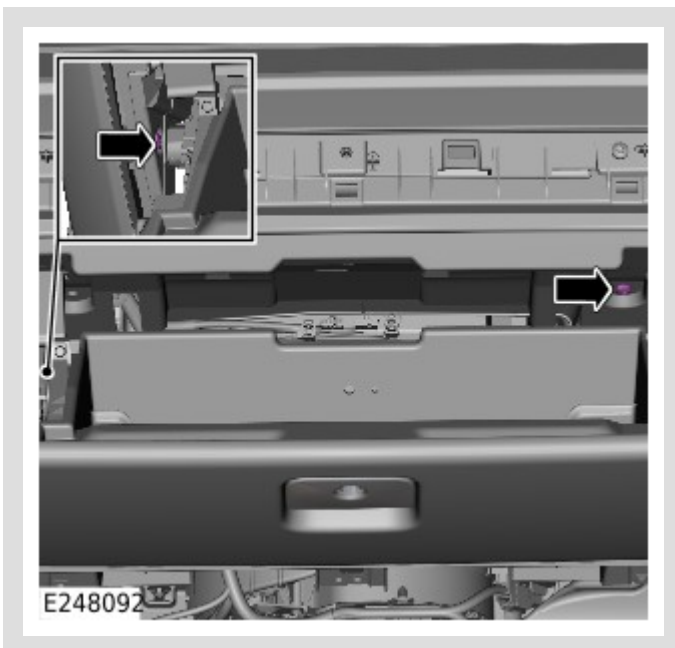

Remove the 2 bolts.

10.

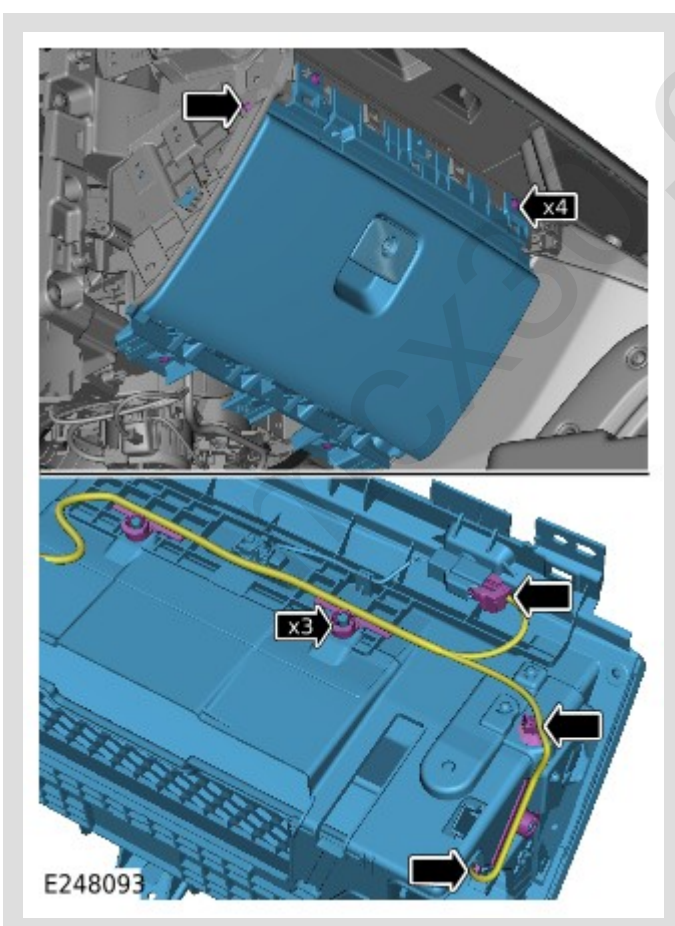

- Remove the 5 bolts.
- Release the 3 clips.
- Disconnect the 2 electrical connectors.
- Remove the glovebox.

INSTALLATION

1.

- Connect the 2 electrical connectors.
- Install the 3 clips.
- Install the glovebox.
- Install and tighten the 5 bolts.

Torque: 2.5Nm

2.

Install and tighten the 2 bolts.

Torque: 2.5Nm

3.

Close the glovebox lid.

4.

- Install the instrument panel trim.
- Install the 10 clips.
- Install and tighten the bolt.

Torque: 1.7Nm

5.

- install the trim on to the side of the instrument panel.
- Install and tighten the 4 bolts.

Torque: 2.5Nm

6.

- Install the trim below the glovebox
- Install the 2 clips.
- Install and tighten the 3 bolts.

Torque: 5Nm

7.

- Connect the electrical connector.
- Install the footwell lamp.

8.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).