

PUBLISHED: 20-JAN-2020
2020.0 DEFENDER (LE), 501-12

INSTRUMENT PANEL AND CONSOLE

INSTRUMENT PANEL LOWER TRIM (G2402066)

mcx30.com

REMOVAL


 NOTE:

- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations for right hand drive vehicles, left hand drive vehicles are similar.

1. Disconnect the startup battery ground cable.


Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

- 2.

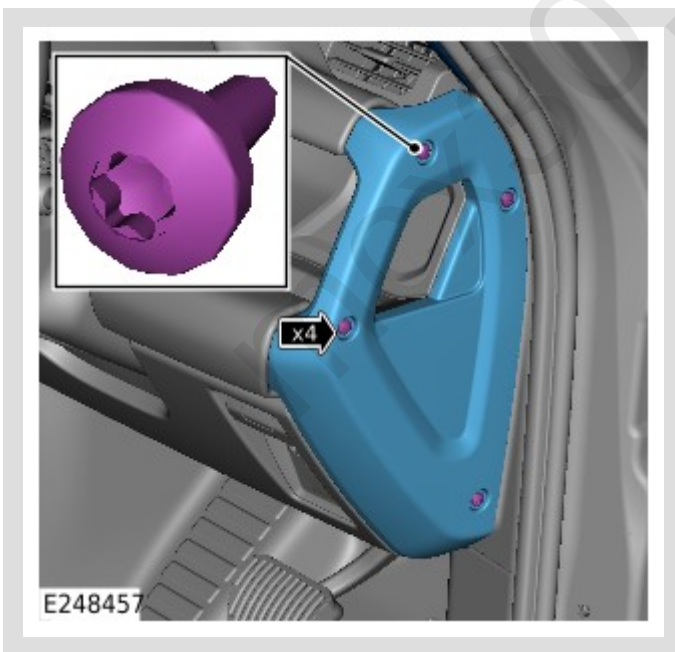

- Remove the 4 bolts.
- Remove the instrument panel outer side trim.

3.

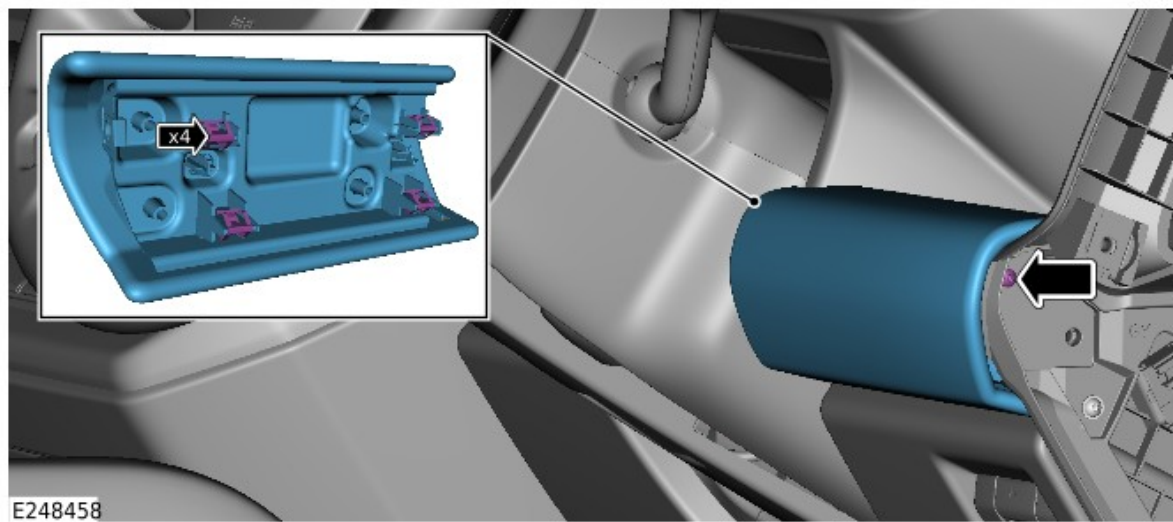


- Remove the bolt.
- Release the 4 clips.
- Remove the instrument panel driver side trim.

4.




- Remove the 4 bolts.
- Remove the instrument panel passenger side trim panel.

5.

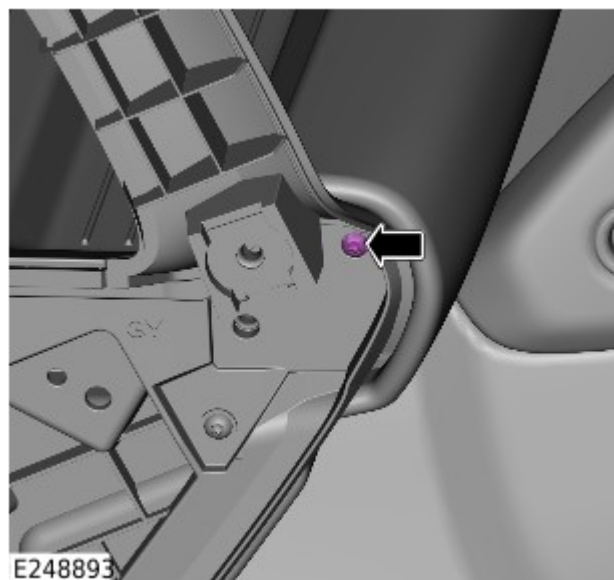


Remove the bolt.

6.

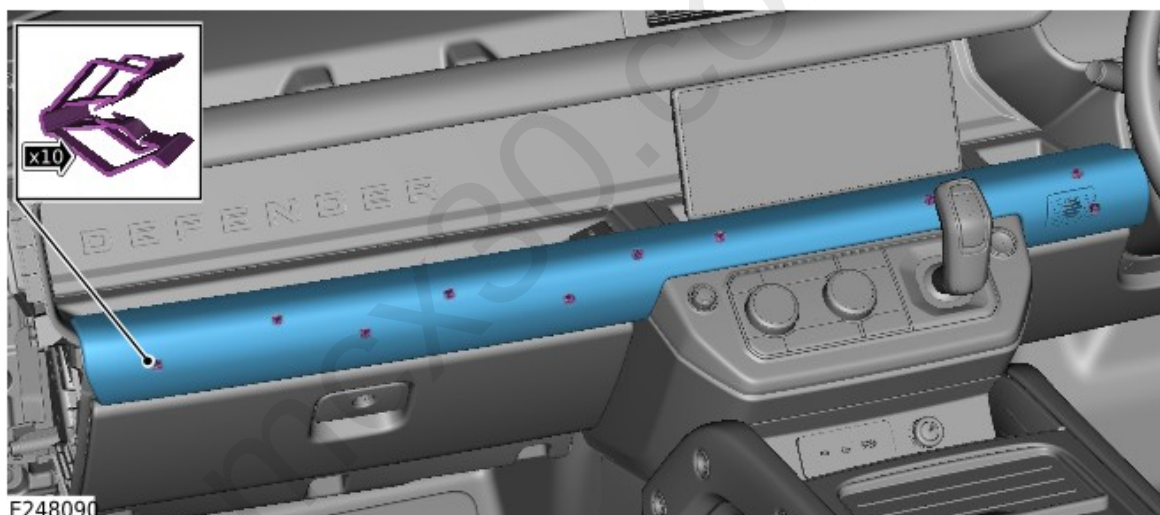


- Release the 10 clips.
- Remove the instrument panel surround trim.

7.

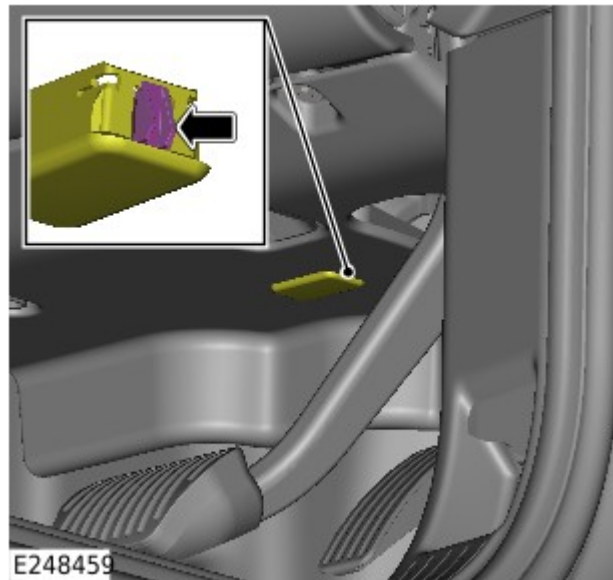


Release the footwell lamp.


8.

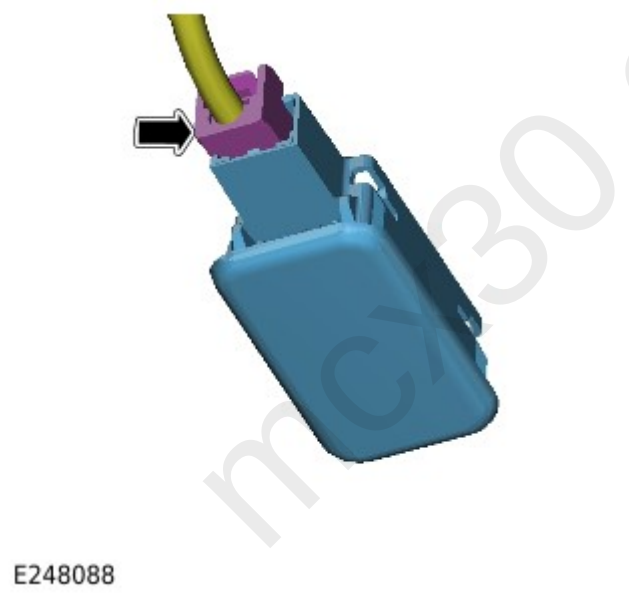

- Disconnect the electrical connector.
- Remove the footwell lamp.

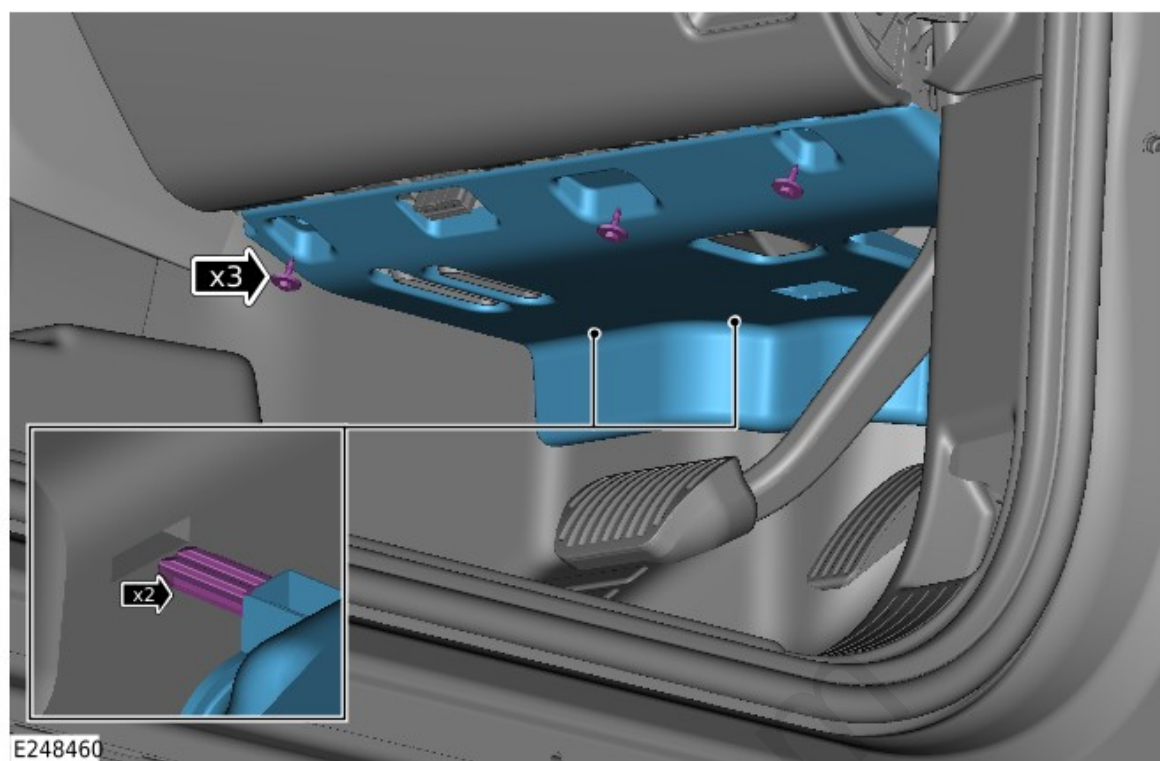


- Remove the 3 bolts.
- Release the 2 clips.
- Remove the instrument panel lower trim cover.

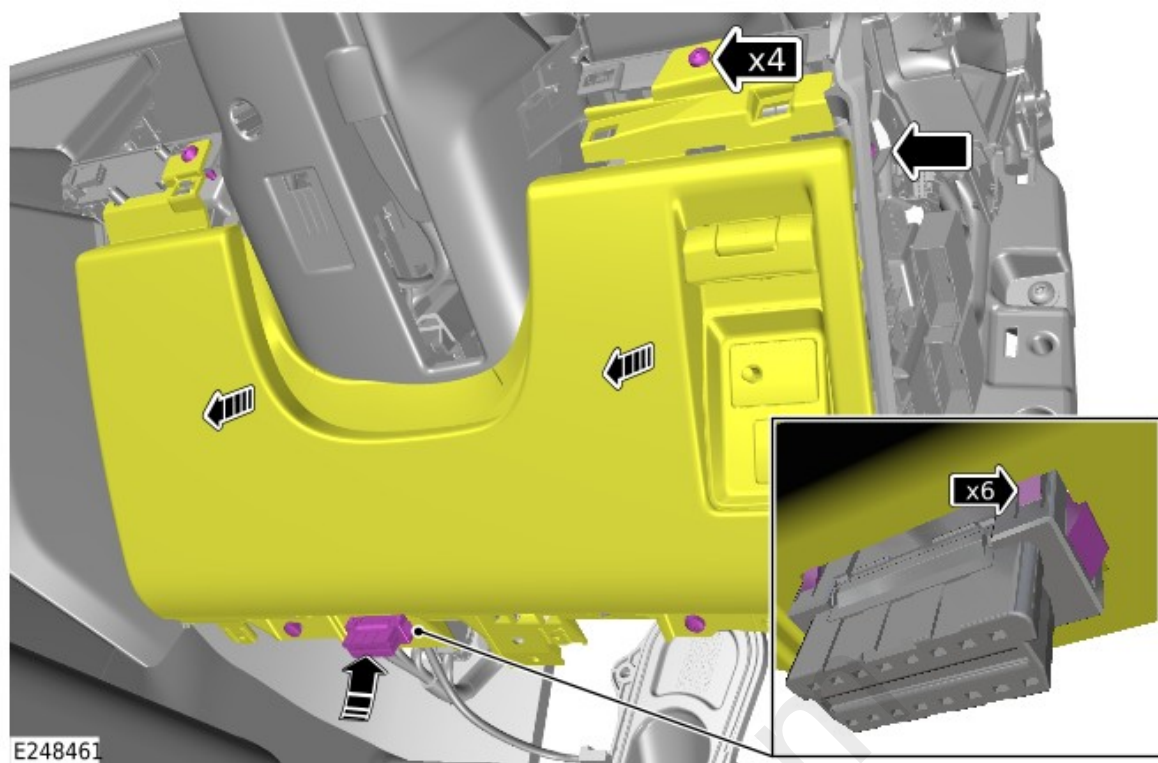

- Remove the 4 bolts.
- Remove the screw.
- Release the On-Board Diagnostics (OBD) electrical connector.
- Release the instrument panel lower trim.

11.

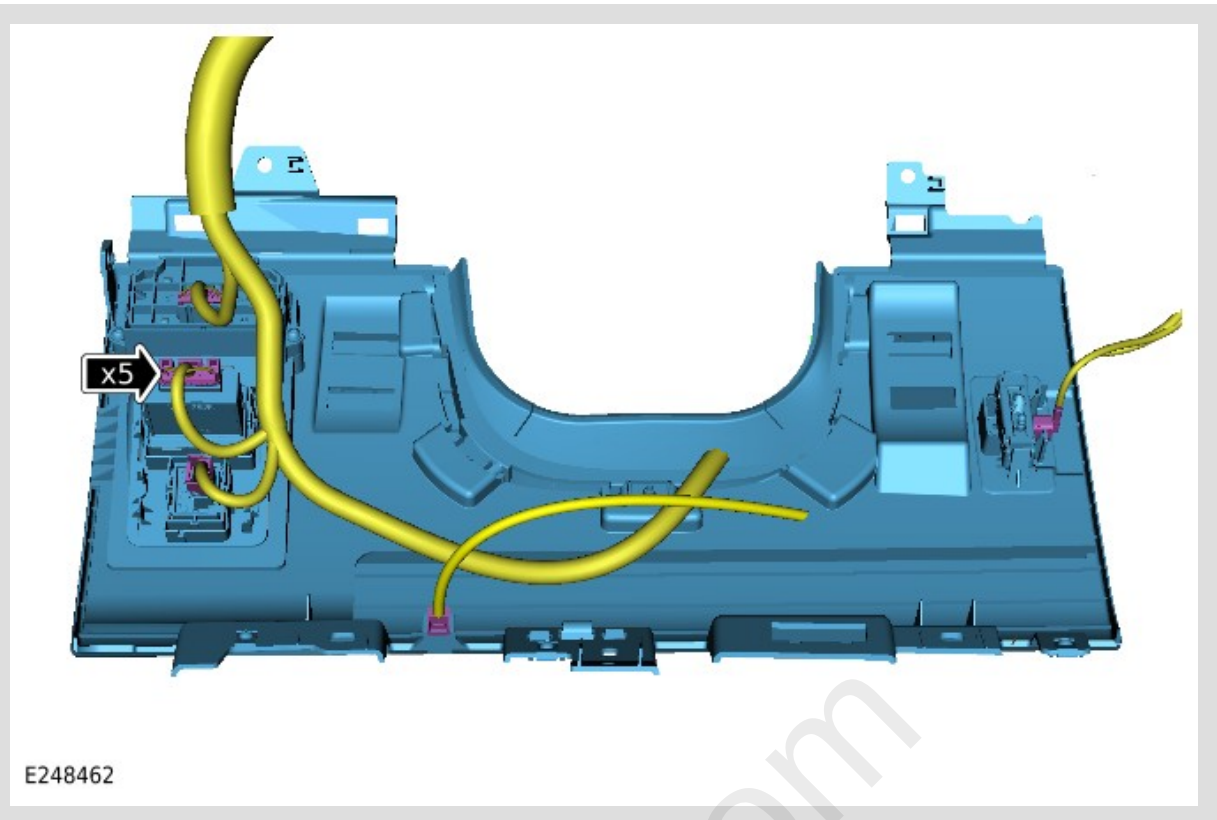


- Disconnect the 5 electrical connectors.
- Remove the instrument panel lower trim.

12.


NOTE:

Do not disassemble further if the component is removed for access only.

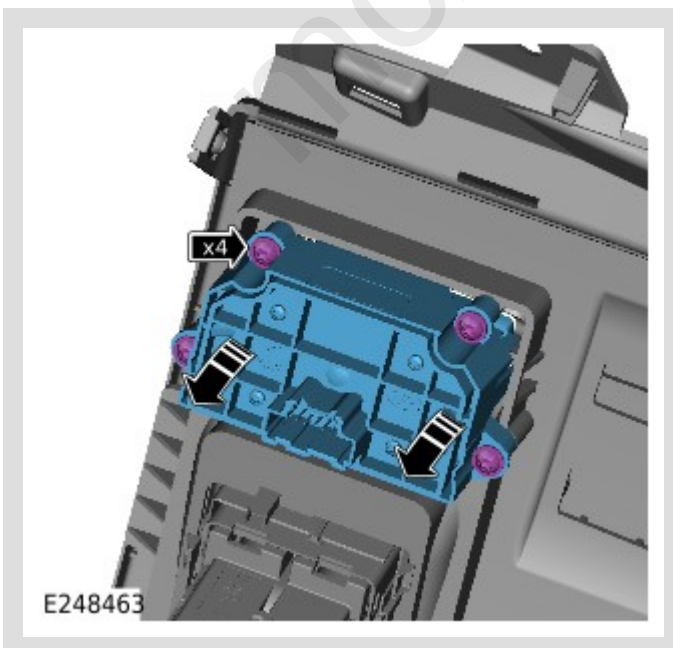


- Remove the 4 screws.
- Remove the Electric Park Brake (EPB) switch.

13.

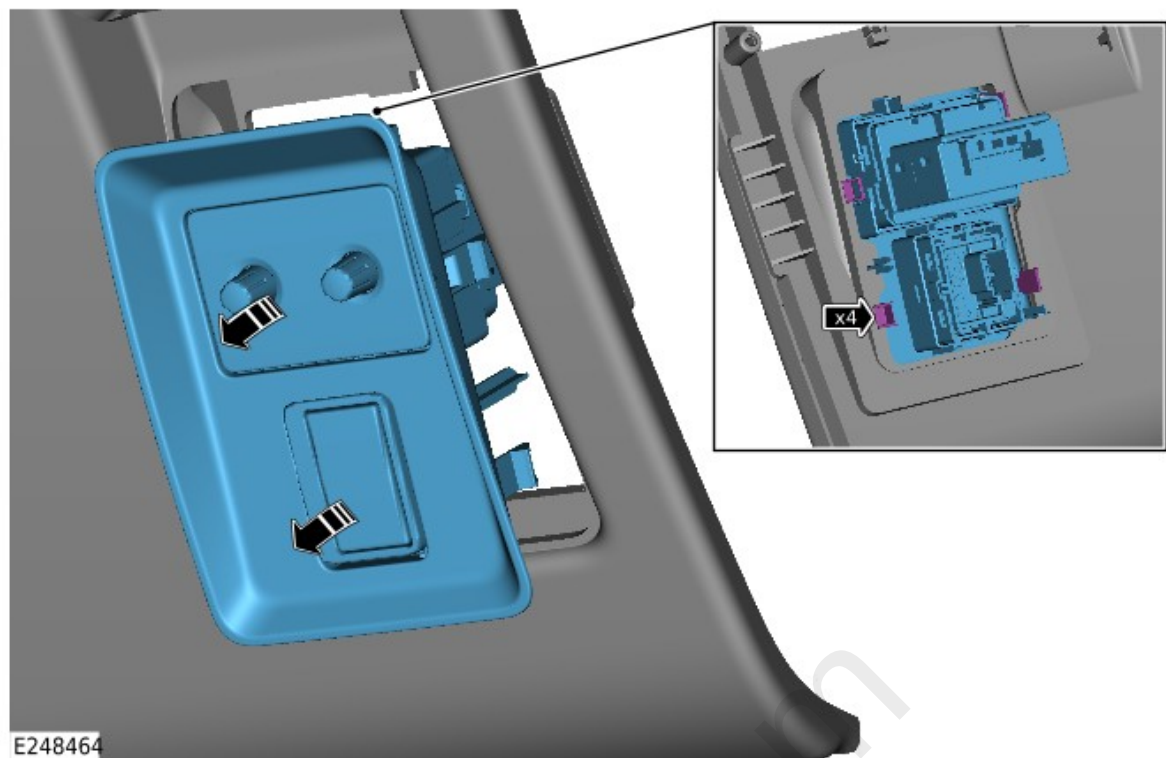

- Release the 4 clips.
- Remove the instrument panel lower trim switchpack.

14.

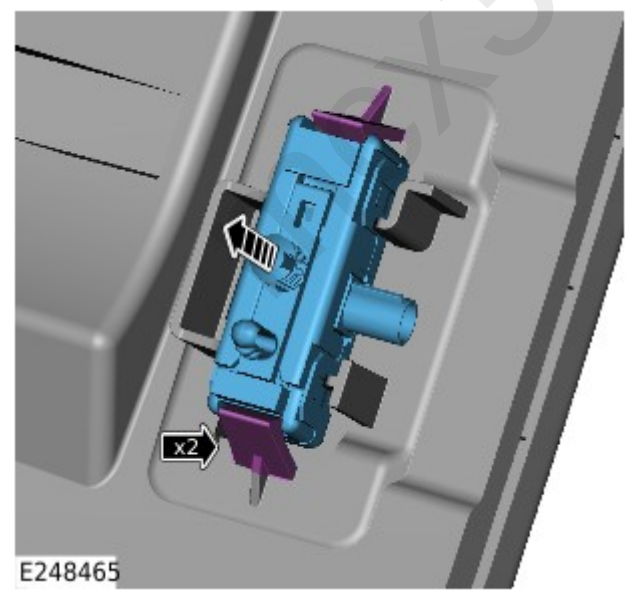

- Release the 2 clips.
- Remove the Bluetooth® antenna.

INSTALLATION

1.

NOTE:

Only complete this step if previously removed.

Install the Bluetooth® antenna.

2.

NOTE:

Only complete this step if previously removed.

Install the instrument panel lower trim switchpack.

3.

NOTE:

Only complete this step if previously removed.

- Install the Electric Park Brake (EPB) switch.
- Install and tighten the 4 screws.

Torque: 1.5Nm

4.

- Connect the 5 electrical connectors.
- Install the instrument panel lower trim.

5.

- Install and tighten the 4 bolts.

Torque: 2.5Nm

- Install and tighten the screw.

Torque: 1.7Nm

- Install the On-Board Diagnostics (OBD) electrical connector.

6.

- Connect the electrical connector.
- Install the footwell lamp.
- Install the instrument panel lower trim cover.
- Install and tighten the 3 bolts.

Torque: 5Nm

7.

- Install the instrument panel lower surround trim.
- Install the 10 clips.
- Install and tighten the bolt.

Torque: 1.7Nm

8.


- Install the instrument panel driver side trim.
- Install the instrument panel driver side trim 4 clips.
- Install and tighten the bolt.

Torque: 1.7Nm

9.

 NOTE:

Make sure that the bolts are centered in the bolt hole.

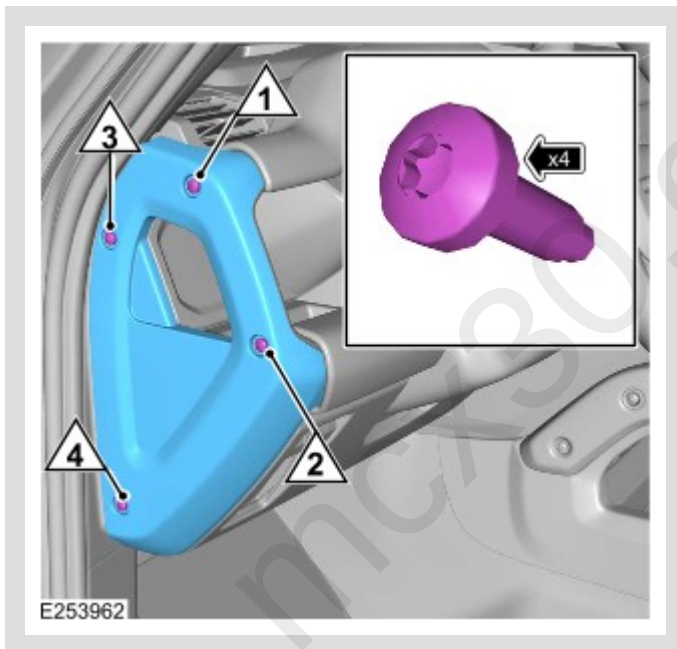


- Install the instrument panel driver outer side trim.
- Install and tighten the 4 bolts in the sequence shown.

Torque: 2.5Nm

10.

 NOTE:

Make sure that the bolts are centered in the bolt hole.

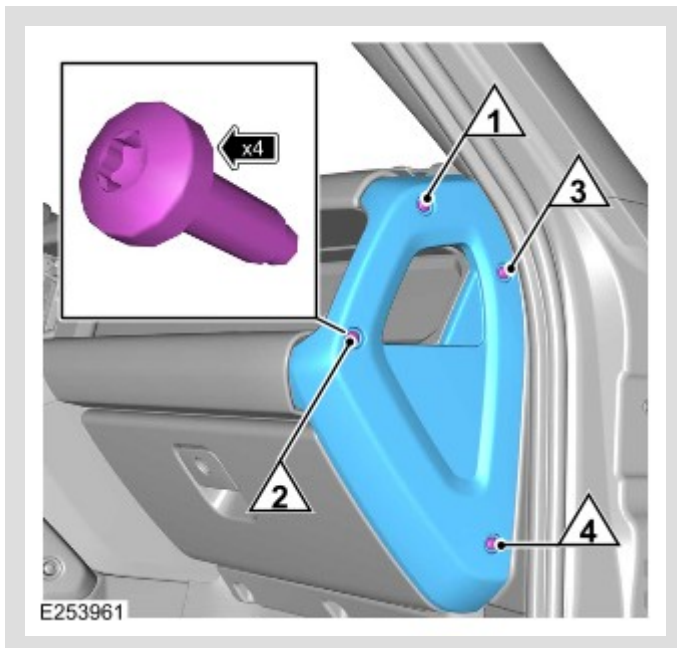

- Install the instrument panel passenger trim panel.
- Install and tighten the 4 bolts in the sequence shown.

Torque: 2.5Nm

11. Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).