

PUBLISHED: 05-MAR-2020
2020.0 DEFENDER (LE), 501-12

INSTRUMENT PANEL AND CONSOLE

OVERHEAD CONSOLE [G2344749]

mcx30.com

REMOVAL

 CAUTION:

- Protect the surrounding trim to avoid damage.
- Make sure that the tools and equipment are clean, free of foreign material and lubricant.


 NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1.

ⓘ CAUTION:

Use a suitable trim tool.

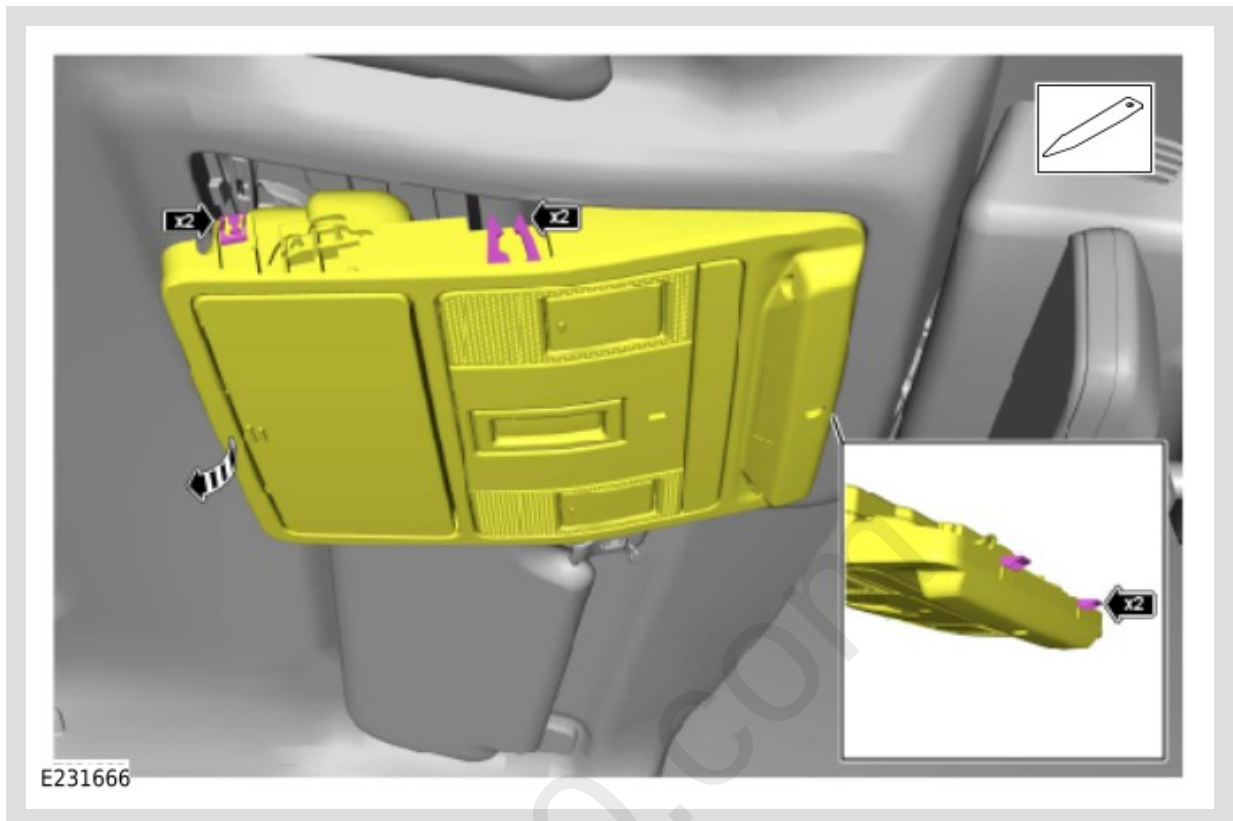

- Carefully release the 6 clips.
- Release the front overhead console.

2.




- Disconnect the 2 electrical connectors.
- Remove the front overhead console.

⚠ CAUTION:

Take extra care not to damage the clips.


⚠ NOTE:

Only do the following step(s) if a new component is to be installed.

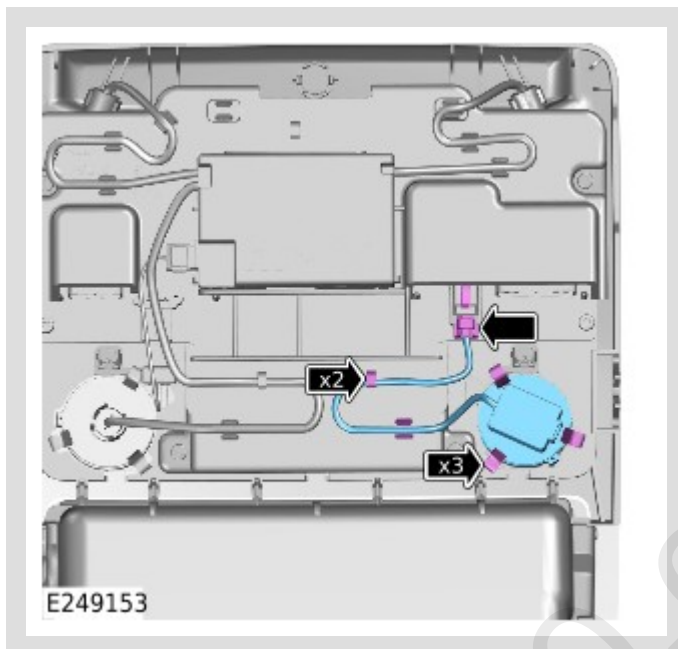


- Disconnect the electrical connector.
- Release the wiring harness from the 2 clips.
- Release the 3 clips.
- Remove the microphone.

4.

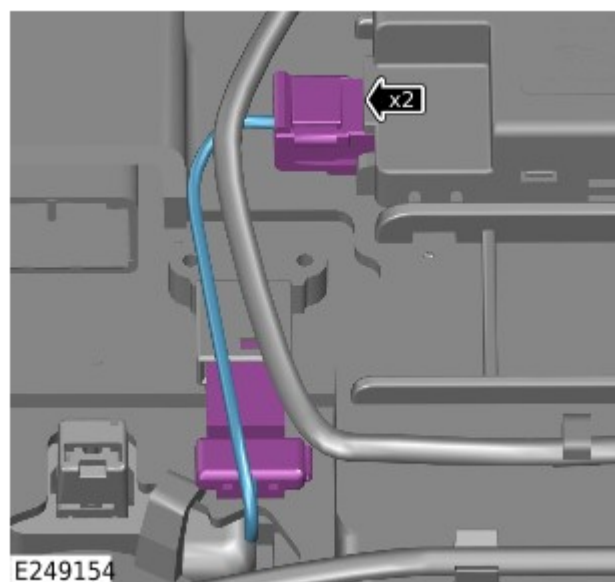


- Disconnect the 2 electrical connectors.
- Remove the wiring harness.

5.

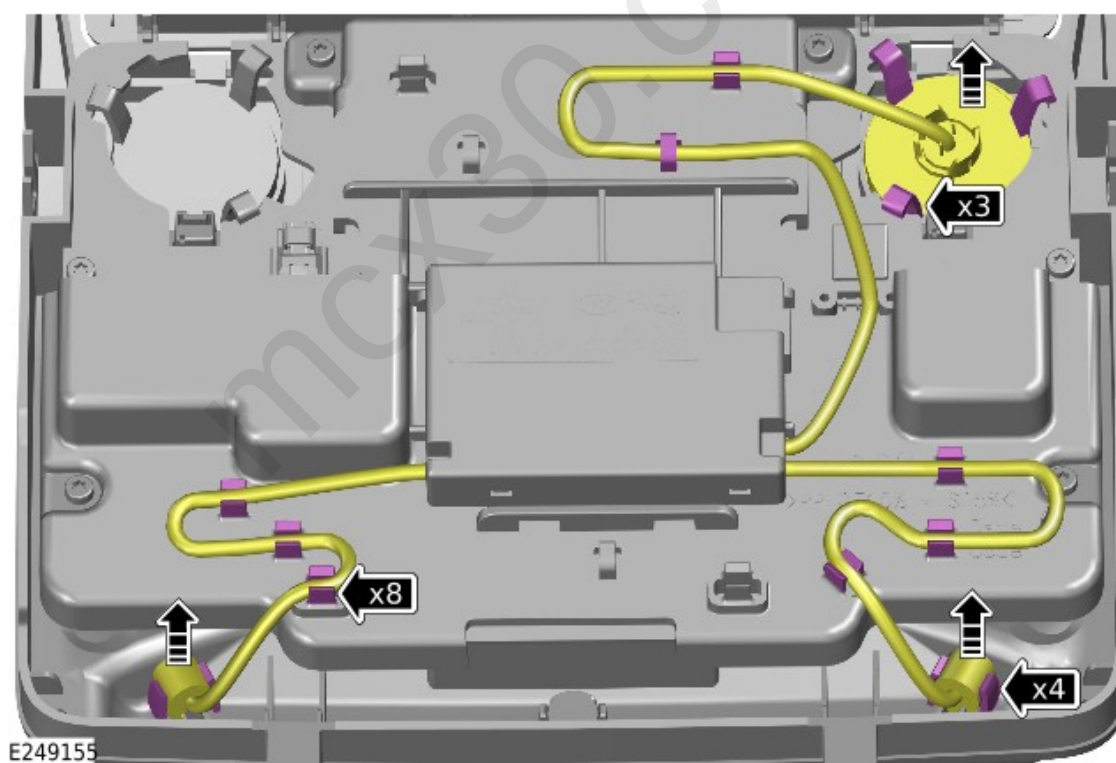

- Release the 3 clips.
- Release the 3 volumetric sensors.
- Release the 3 wiring harnesses.

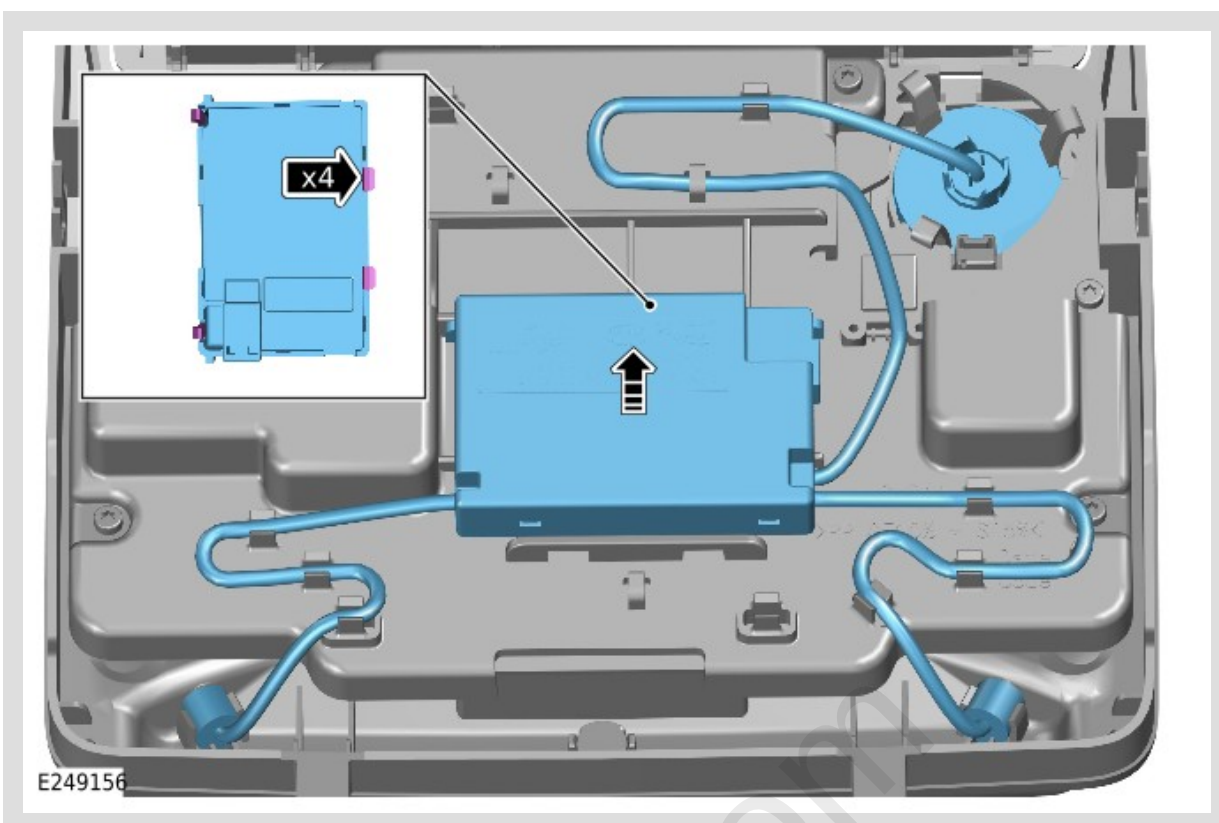

- Release the 4 clips.
- Remove the volumetric sensor module.

INSTALLATION

1.



NOTE:

- Steps 1 to 4 are only required if the components were previously removed.
- Make sure that all the clips are correctly installed.

- Install the volumetric sensor module to the front overhead console.
- Install the 4 volumetric sensor module clips.

2.



CAUTION:

Take extra care not to damage the clips.

- Install the 3 volumetric sensors to the front overhead console.
- Install the 3 volumetric sensor wiring harnesses to the 8 clips.

3.

Connect the 2 electrical connectors to the volumetric sensor module and the front overhead console.

4.



CAUTION:

Take extra care not to damage the clips.

- Install the microphone to the front overhead console.
- Install the microphone wiring harness to the 2 clips.
- Connect the microphone electrical connector to the front overhead console.

5.

Connect the 2 front overhead console electrical connectors.

6.



NOTE:

Make sure that all the clips are correctly installed.

- Install the front overhead console.
- Install the 6 front overhead console clips.